

MMS

MEASUREMENT CABLE ASSEMBLIES

fig. 1


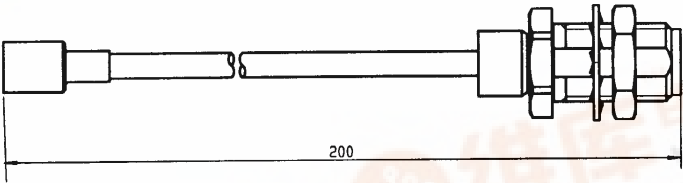



fig. 2

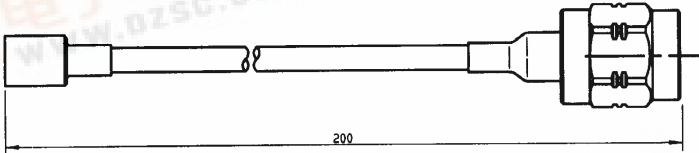

| cable group | part number  | fig. | composition                                |
|-------------|--------------|------|--------------------------------------------|
| 2 /50/ S    | R285 023 021 | 1    | R209 080 500 + C291 145 007 + R124 310 020 |
| 2 /50/ S    | R284 007 013 | 2    | R209 080 500 + C291 145 007 + R124 069 120 |

Both cable assemblies are equipped with a straight MMS plug with a sliding interface to allow 500 matings and a SMA connector.

EXTRACTION TOOL

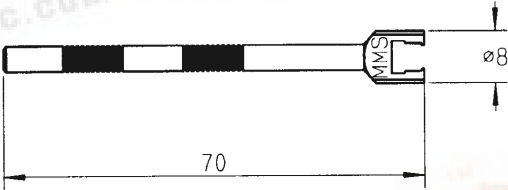

| part number  |
|--------------|
| R282 868 100 |



Materials and finish : black anodized aluminium  
The anodization allows the electric insulation and protects from the oxidization.