





查询QZ0100/2M00/WH供应商

捷多邦, 专业PCB打样工厂, 24小时加急出货

BULGIN
Electrical + Electronic Components

EN60 320 POWER CORDS

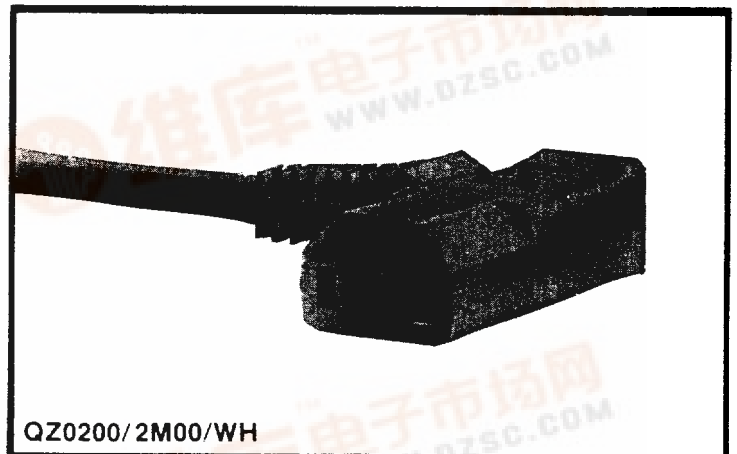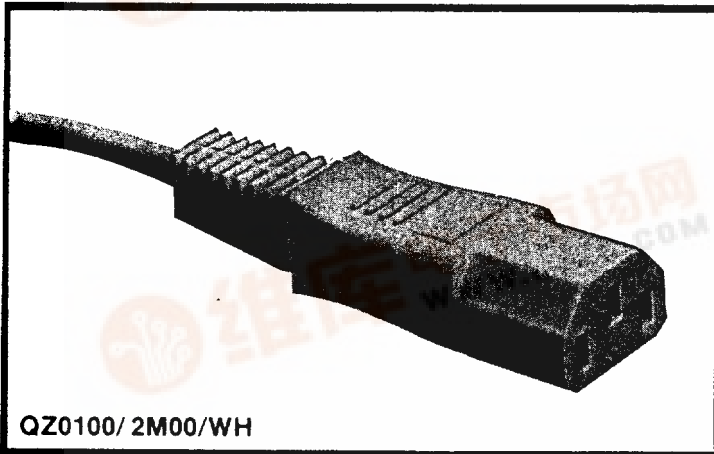

Power cords comprising a non-rewirable straight, or right angled cable entry style, 10A, EN60 320 connector to stripped and bared ends.

Features

- ★ **Ultrasonically welded connector with internal labyrinth construction for additional safety and reliability.**
- ★ **Tough polycarbonate moulded connector shells.**
- ★ **All cordsets subject to rigorous 100% tests to ensure quality.**

List No.	Description
QZ0100/ 2M00/WH	EN60 320 to stripped and bared ends, length 2m. Colour white
QZ0200/ 2M00/WH	Right angled cable entry EN60 320 to stripped and bared ends. Length 2m. Colour White

TECHNICAL DATA —

Max. Rating: 10A. 250V a.c.

Contact Resistance: <10 m Ω .

Insulation Resistance: >10⁵ M Ω . (@500V. d.c.).

A.C. Breakdown: Pole-Pole 6.5kV. Poles-Accessible Parts 5kV.

Operating Temperature: 0°C to +70°C.

Withdrawal Force: 10N (Min.), 50N (Max.).

Materials:-

Mouldings: Polycarbonate. Flammability Rating U.L. 94V-0.

Contacts: Phosphor Bronze.

Farnell Electronic Components Ltd.

Canal Road Leeds LS12 2TU

Telephone: 0532 636311 Telex: 55147 Fax: 0532 633411



