306 m 8 m



Part No: RM-001-418

- Rack contains
- Remote mains plug in adaptors
- Remote control
  hand set

Cables

到这里!! 日!!!!!!

ંટ્રાક્ટ્રમાં//કુરો કેલ્ ઉદ્દેશના લોકોલ્ટ્રો

Tyrks s basinss credit case

Talling a Market Market

minutery compliance let 802; and EN50082-1

Remote control 2/DC cattery operated.

## WARNING

objective shock installation must be not aken by qualified electricians only. No second can be party inside. Operation of the car of car as within a Social area may estimate organity educed range. This product must be mounted within a suitable housing. It is the responsibility of the designer to ensure that all safety issues are adhered to in regards to compliance with the Low Voltage Directive.






## Preparing to use the Wireless Remote Control Converter

- Remove the plastic tab protruding from the rear of the remote control before operating
- No internal setting up is required
- The Wireless Remote Control Converter is capable of switching 240 volts AC up to 5 amps via a single pole relay. Designers are advised to refer to relay markings.

## **Features**

- Radio remote control operates through walls and ceilings up to a range of 25 meters.
- Operates any mains product up to 5 amps max.
- No setting up is required.
- Factory pre-set site code
- 16 bit transmission code

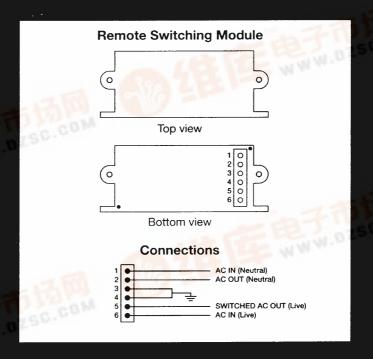

AEI Security Limited Sherwood Industrial Park, Icklesham, Fast Sussex TN36 4BA