


TOROIDAL INDUCTORS HIGH INDUCTANCE

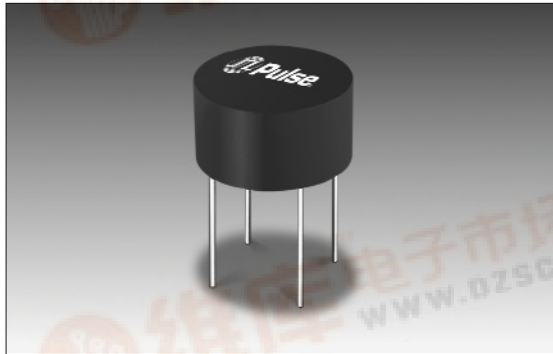

- High frequency, low loss operation (up to 100 kHz)
- Encapsulated construction
- Ambient temperature range of -55°C to +70°C
- Good inductance stability with temperature

Electrical Specifications @ 25°C


REFERENCE OPERATING VALUES					DESIGN CONTROL VALUES		
Part Number	Inductance Typical (mH)	I _{DC} (AMPS)	Maximum E _{TOP} (V-μSec)	Energy Storage (μJ MIN) ¹	Inductance No DC (mHy) (±20%) ²	DCR (Ω MAX)	Size Code
PE-50500	0.5	.60	110	90	.72	0.35	7
PE-50501	1.0	.35	160	60	1.51	0.75	7
PE-50502	2.0	.25	225	60	2.88	1.30	7
PE-50503	0.5	1.75	325	765	.72	0.35	8
PE-50506	0.5	2.75	650	1890	.75	0.25	9
PE-50508	2.0	1.50	1200	2250	2.70	0.75	9

NOTES: 1. $\frac{LI^2}{2}$ rating is the ability of the inductor to store energy.



2. Inductance measured at 0.4 Volts and 20 kHz.

Mechanical



Inductance Variation with I_{DC} Change

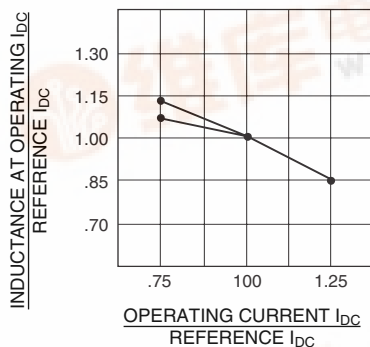

Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are ± .010
0,25



Schematic



Size Code	A	B	C	D	E
7	.754 19,15	.400 10,16	.500 12,70	.625 15,87	0.03 0,76
8	1.140 28,95	.665 16,89	.500 12,70	1.00 25,40	0.03 0,76
9	1.416 35,96	.850 21,59	.500 12,70	1.250 13,75	0.03 0,76