



This is a sample photo.

Order symbol PC 100/75 LT

El. number	EAN-code	6418074022264
Sweden		
Denmark		
Finland	3420413	

Including

Enclosure cover with cover screws, body with mounting screws and gasket.

Product Properties


USA: UL Type 1, 4, 4X, 6

EURO: IP 66/67 (EN 60529); IK 08 (EN 50102)

MNX PC

In the corners of these the areas we have radius 2.0 mm in all sizes. The higher/deeper the cover is, the smaller the recess in the cover.

Cover type	Recessed areas (mm)
II 100 / 10	99x49
II 100 / 25	98x48
II 100 / 50	92x42
II 100 / 75	90x40

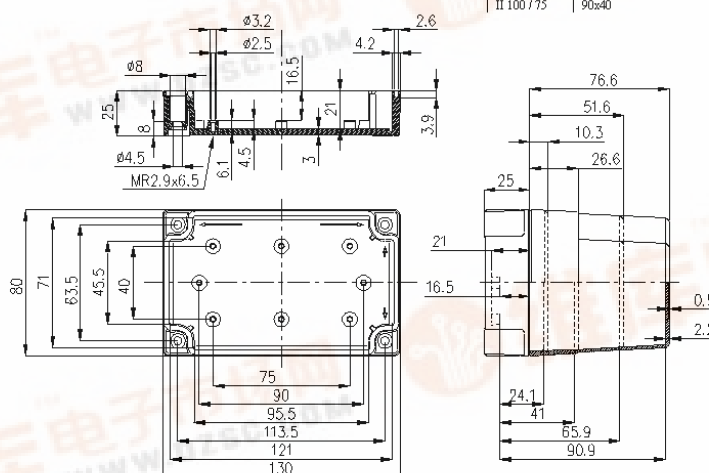

Technical Information of Product Group

Standard colour: RAL 7035

Temp. range-in cont. use: Max. +80 °C

Flame resistance: UL94-5V (UL 746 C 5)

Temp. range-of material: - 40 °C - + 120 °C

Accessories

Sealing bushing	DP 14553
Condensation water plug	MB 12189
Mounting screw	MR ZN2.9x6.5
Ventilation device	MB 10631
Inspection window	L 02
Cover screw	SS 14551BH
Mounting plate	MIV 100
DIN Rail	MIV 5
DIN Rail	MIV 10
DIN Rail	MIV 5
DIN Rail	MIV 10
Front plate	FP A 100/130
Handle	TH A