



This is a sample photo.

Order symbol PC 100/100 LG**El. number** Sweden
Denmark
Finland 3420307
EAN-code 6418074022035**Including**

Enclosure cover with cover screws, body with mounting screws and gasket.

Product Properties

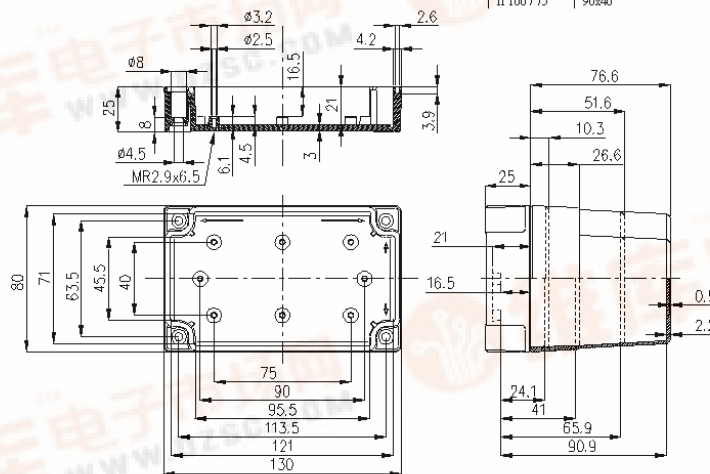
USA: UL Type 1, 4, 4X, 6

EURO: IP 66/67 (EN 60529); IK 08 (EN 50102)

MNX PC

In the corners of these areas we have radius 2.0 mm in all sizes.
The higher/deeper the cover is, the smaller the recess in the cover.

Cover type	Recessed areas (mm x mm)
II 100 / 10	99x49
II 100 / 25	98x48
II 100 / 50	92x42
II 100 / 75	90x40

**Technical Information of Product Group**

Standard colour: RAL 7035

Temp. range-in cont. use: Max. +80 °C

Flame resistance: UL94-5V (UL 746 C 5)

Temp. range-of material: - 40 °C - + 120 °C

Accessories

Sealing bushing DP 14553
Condensation water plug MB 12189
Mounting screw MR ZN2.9x6.5
Ventilation device MB 10631
Inspection window L 02
Cover screw SS 14551H
Mounting plate MIV 100
DIN-Rail MIV 5
DIN-Rail MIN 10
DIN-Rail MIN 5
DIN-Rail MIV 10
Front plate EP A 100/130
Hinge TH A