





BAW 79A ... BAW 79D

Silicon Switching Diodes

- Switching applications
- High breakdown voltage
- Common cathode

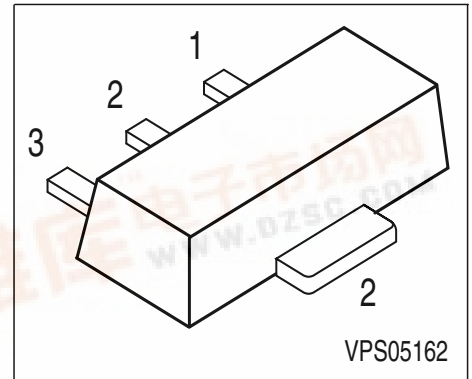

Type	Marking	Pin Configuration			Package
BAW 79A	GE	1 = A1	2 = C1/2	3 = A2	SOT-89
BAW 79B	GF	1 = A1	2 = C1/2	3 = A2	SOT-89
BAW 79C	GG	1 = A1	2 = C1/2	3 = A2	SOT-89
BAW 79D	GH	1 = A1	2 = C1/2	3 = A2	SOT-89

Maximum Ratings

Parameter	Symbol	BAW 79 A	BAW 79 B	BAW 79 C	BAW 79 D	Unit
Diode reverse voltage	V_R	50	100	200	400	V
Peak reverse voltage	V_{RM}	50	100	200	400	
Forward current	I_F	1				A
Peak forward current	I_{FM}	1				
Surge forward current, $t = 1 \mu s$	I_{FS}	10				
Total power dissipation, $T_S = 115^\circ C$	P_{tot}	1				W
Junction temperature	T_j	150				$^\circ C$
Storage temperature	T_{stg}	-65 ... 150				

Thermal Resistance

Junction - ambient ¹⁾	R_{thJA}	≤ 175	K/W
Junction - soldering point	R_{thJS}	≤ 35	


1) Package mounted on epoxy pcb 40mm x 40mm x 1.5mm / 6cm² Cu



Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit	
		min.	typ.	max.		
DC characteristics						
Breakdown voltage $I_{(BR)} = 100\ \mu\text{A}$ BAW 79A BAW 79B BAW 79C BAW 79D	$V_{(BR)}$	 50 100 200 400	 - - - -	 - - - -	V	
Forward voltage $I_F = 1\ \text{A}$ $I_F = 2\ \text{A}$	V_F	 - -	 - -	 1.6 2		
Reverse current $V_R = V_{Rmax}$	I_R	 -	 -	 1		μA
Reverse current $V_R = V_{Rmax}$, $T_A = 150\ ^\circ\text{C}$	I_R	 -	 -	 50		
AC characteristics						
Diode capacitance $V_R = 0\ \text{V}$, $f = 1\ \text{MHz}$	C_D	 -	 10	 -	pF	
Reverse recovery time $I_F = 200\ \text{mA}$, $I_R = 200\ \text{mA}$, $R_L = 100\ \Omega$, measured at $I_R = 20\text{mA}$	t_{rr}	 -	 1	 -	μs	

Test circuit for reverse recovery time

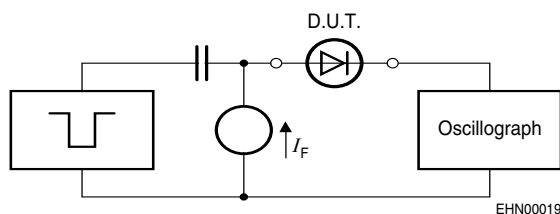


Pulse generator: $t_p = 100\text{ns}$, $D = 0.05$,
 $t_f = 0.6\text{ns}$, $R_i = 50\Omega$

Oscilloscope: $R = 50\Omega$, $t_r = 0.35\text{ns}$,
 $C \leq 1\text{pF}$


Forward current $I_F = f(T_A^*; T_S)$

* Package mounted on epoxy

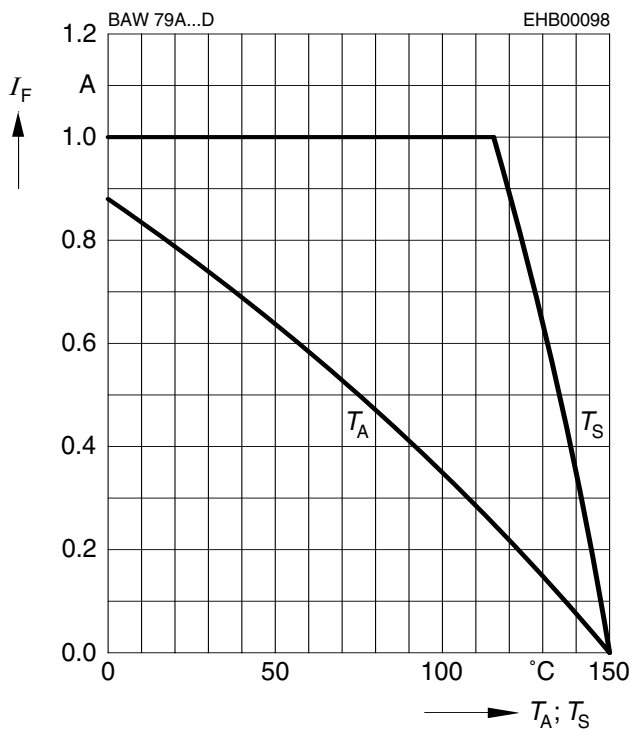


Forward current $I_F = f(V_F)$

$T_A = 25^\circ\text{C}$

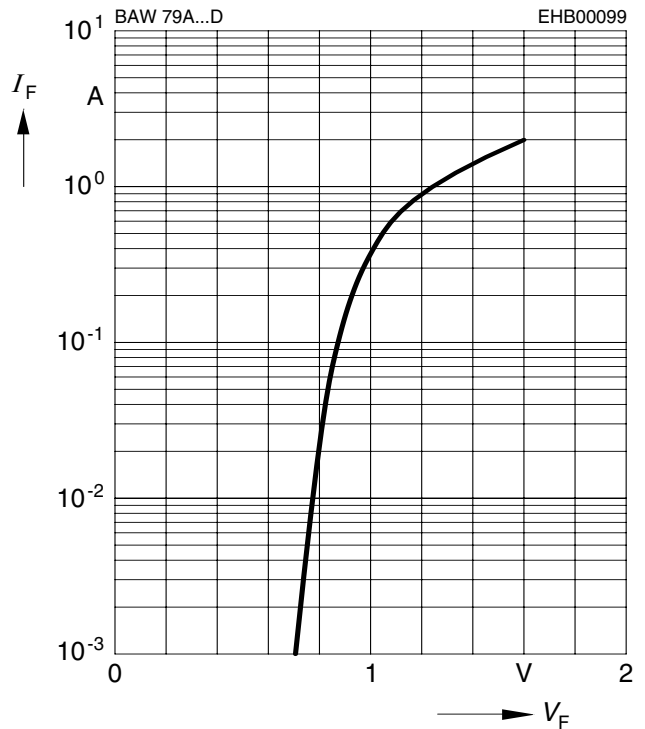

Peak forward current $I_{FM} = f(t_p)$

$T_A = 25^\circ\text{C}$

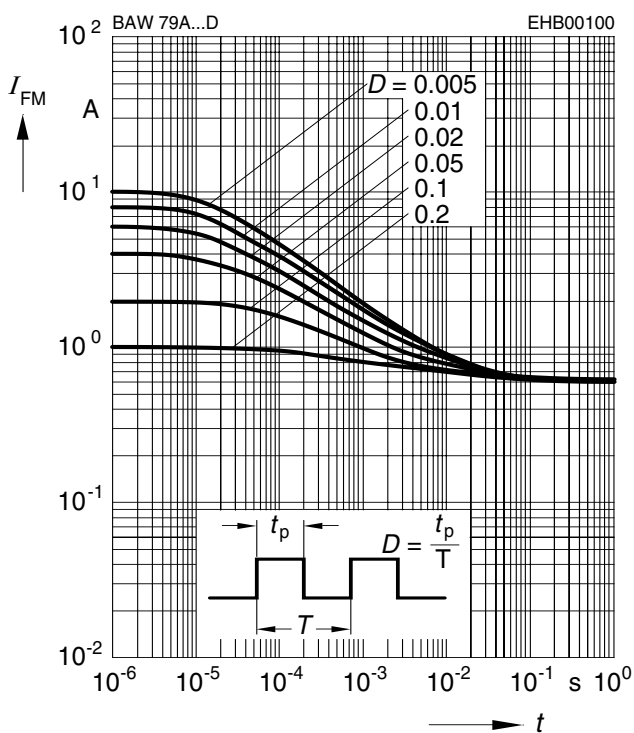

Reverse current $I_R = f(T_A)$

$V_R = V_{Rmax}$

