



SAW Components

SAW GPS Extractor Filter

GPS Extractor

Series/type:	B7742
Ordering code:	B39162B7742E310
Date:	May 24, 2006
Version:	2.1

© EPCOS AG 2006. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.



SAW Components

B7742

SAW GPS Extractor Filter

1575.42 / 859.0 / 1810.0 / 1920.0 / 2441.75 MHz

Data Sheet




Application

- Low loss RF GPS Extractor filter for mobile phones using common antenna for GPS and Cellular or PCS or/and K-PCS or Bluetooth band
- Placed between antenna, GPS band and Cellular/PCS/K-PCS/Bluetooth band
- No switches and control lines required
- Integrated low loss GPS filter with single ended output 50 Ω
- Very low insertion attenuation in GPS and Non-GPS band
- High selectivity of GPS filter
- Low amplitude ripple in all bands
- Usable passbands 2 MHz (GPS), 70 MHz (Cellular), 120 MHz (K-PCS), 140 MHz (PCS), 83.5 MHz (Bluetooth)




Features

- Package size 2.5 x 2.0 x 0.68 mm³
- Package code DCS6N
- RoHS compatible
- Approximate weight 0.015 g
- Package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- **Electrostatic Sensitive Device (ESD)**

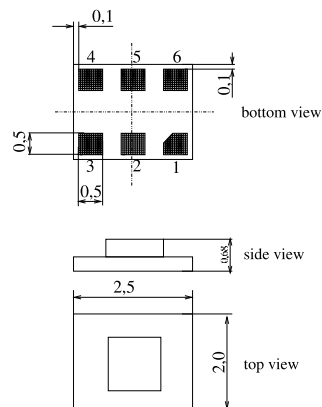

Pin configuration

- 1 Input antenna
- 3 Output GPS band
- 6 Output Non-GPS band (Cellular or K-PCS or PCS or Bluetooth band depending on external matching)
- 4 To be grounded
- 2,5 Ground

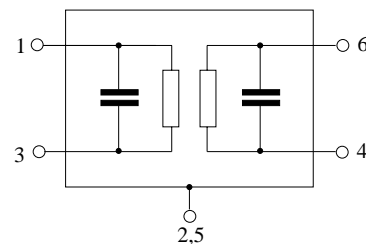



SAW Components

B7742

SAW GPS Extractor Filter

1575.42 / 859.0 / 1810.0 / 1920.0 / 2441.75 MHz


Data Sheet



Characteristics

CELLULAR (859 MHz) + GPS (1575.42 MHz)

Temperature range for specification: $T = -30\text{ °C to }+85\text{ °C}$
 Terminating input antenna impedance: $Z_{ANT} = 50\ \Omega \parallel 12\text{ nH}$
 Terminating GPS impedance: $Z_{GPS} = 50\ \Omega$
 Terminating non GPS impedance: $Z_{nGPS} = 50\ \Omega \parallel 27\text{ nH}$



		B7742			
		min.	typ.¹⁾ @ 25 °C	max.¹⁾	
Nominal frequency 1 (GPS)	f_{N1}	—	1575.42	—	MHz
Nominal frequency 2 (Cellular)	f_{N2}	—	859.0	—	MHz
Maximum insertion attenuation					
Antenna-GPS	1574.42 ... 1576.42 MHz	—	1.1	1.6 ²⁾	dB
Antenna-Cellular	824.0 ... 894.0 MHz	—	0.35	0.6	dB
Attenuation					
Antenna-GPS	824.0 ... 894.0 MHz	33	36	—	dB
Antenna-GPS	1750.0 ... 1990.0 MHz	34	38	—	dB
VSWR (Antenna)					
Cellular band	824.0 ... 894.0 MHz	—	1.2	1.5	
GPS band	1574.42 ... 1576.42 MHz	—	1.4	1.7	
VSWR (GPS)					
GPS band	1574.42 ... 1576.42 MHz	—	1.3	1.7	
VSWR (Non-GPS)					
Cellular band	824.0 ... 894.0 MHz	—	1.3	1.6	
Isolation between Non GPS and GPS path					
Cellular band	824.0 ... 894.0 MHz	33	37	—	dB
K-PCS + PCS band	1750.0 ... 1990.0 MHz	34	39	—	dB

¹⁾ PCB loss de-embedded
²⁾ 1.4 dB max. at 25 °C



SAW Components	B7742
SAW GPS Extractor Filter	1575.42 / 859.0 / 1810.0 / 1920.0 / 2441.75 MHz


Data Sheet



Characteristics

K-PCS (1810 MHz) + GPS (1575.42 MHz)

Temperature range for specification: $T = -30\text{ °C to }+85\text{ °C}$
 Terminating input antenna impedance: $Z_{ANT} = 50\ \Omega \parallel 10\text{ nH}$
 Terminating GPS impedance: $Z_{GPS} = 50\ \Omega$
 Terminating non GPS impedance: $Z_{nGPS} = 50\ \Omega \parallel 3.9\text{ nH}$



		B7742			
		min.	typ.¹⁾ @ 25 °C	max.¹⁾	
Nominal frequency 1 (GPS)	f_{N1}	—	1575.42	—	MHz
Nominal frequency 3 (K-PCS)	f_{N3}	—	1810.0	—	MHz
Maximum insertion attenuation					
Antenna-GPS	1574.42 ... 1576.42 MHz	—	1.2	1.65 ²⁾	dB
Antenna-K-PCS	1750.0 ... 1870.0 MHz	—	0.6	0.9	dB
Attenuation					
Antenna-GPS	824.0 ... 894.0 MHz	37	42	—	dB
Antenna-GPS	1750.0 ... 1990.0 MHz	33	37	—	dB
VSWR (Antenna)					
K-PCS band	1750.0 ... 1870.0 MHz	—	1.3	1.6	
GPS band	1574.42 ... 1576.42 MHz	—	1.5	1.9	
VSWR (GPS)					
GPS band	1574.42 ... 1576.42 MHz	—	1.5	1.8	
VSWR (Non-GPS)					
K-PCS band	1750.0 ... 1870.0 MHz	—	1.2	1.5	
Isolation between Non GPS and GPS path					
Cellular band	824.0 ... 894.0 MHz	35	40	—	dB
K-PCS + PCS band	1750.0 ... 1990.0 MHz	33	38	—	dB

¹⁾ PCB loss de-embedded
²⁾ 1.5 dB max. at 25 °C



SAW Components

B7742

SAW GPS Extractor Filter

1575.42 / 859.0 / 1810.0 / 1920.0 / 2441.75 MHz


Data Sheet



Characteristics

PCS (1920 MHz) + GPS (1575.42 MHz)

Temperature range for specification: $T = -30\text{ °C to }+85\text{ °C}$
 Terminating input antenna impedance: $Z_{ANT} = 50\ \Omega \parallel 10\text{ nH}$
 Terminating GPS impedance: $Z_{GPS} = 50\ \Omega$
 Terminating non GPS impedance: $Z_{nGPS} = 50\ \Omega \parallel 3.3\text{ nH}$



		B7742			
		min.	typ.¹⁾ @ 25 °C	max.¹⁾	
Nominal frequency 1 (GPS)	f_{N1}	—	1575.42	—	MHz
Nominal frequency 4 (PCS)	f_{N4}	—	1920.0	—	MHz
Maximum insertion attenuation					
Antenna-GPS	1574.42 ... 1576.42 MHz	—	1.2	1.65 ²⁾	dB
Antenna-PCS	1850.0 ... 1990.0 MHz	—	0.6	0.9	dB
Attenuation					
Antenna-GPS	824.0 ... 894.0 MHz	37	42	—	dB
Antenna-GPS	1750.0 ... 1990.0 MHz	33	37	—	dB
VSWR (Antenna)					
PCS band	1850.0 ... 1990.0 MHz	—	1.3	1.6	
GPS band	1574.42 ... 1576.42 MHz	—	1.6	1.9	
VSWR (GPS)					
GPS band	1574.42 ... 1576.42 MHz	—	1.5	1.8	
VSWR (Non-GPS)					
PCS band	1850.0 ... 1990.0 MHz	—	1.2	1.5	
Isolation between Non GPS and GPS path					
Cellular band	824.0 ... 894.0 MHz	35	40	—	dB
K-PCS + PCS band	1750.0 ... 1990.0 MHz	33	38	—	dB

¹⁾ PCB loss de-embedded
²⁾ 1.5 dB max. at 25 °C



SAW Components

B7742

SAW GPS Extractor Filter

1575.42 / 859.0 / 1810.0 / 1920.0 / 2441.75 MHz


Data Sheet



Characteristics

Bluetooth (2441.75 MHz) + GPS (1575.42 MHz)

Temperature range for specification: $T = -30\text{ °C to }+85\text{ °C}$
 Terminating input antenna impedance: $Z_{ANT} = 50\ \Omega \parallel 10\text{ nH}$
 Terminating GPS impedance: $Z_{GPS} = 50\ \Omega$
 Terminating non GPS impedance: $Z_{nGPS} = 50\ \Omega \parallel 2.2\text{ nH}$



		B7742			
		min.	typ.¹⁾ @ 25 °C	max.¹⁾	
Nominal frequency 1 (GPS)	f_{N1}	—	1575.42	—	MHz
Nominal frequency 5 (Bluetooth)	f_{N5}	—	2441.75	—	MHz
Maximum insertion attenuation					
Antenna-GPS	1574.42 ... 1576.42 MHz	—	1.1	1.6 ²⁾	dB
Antenna-Bluetooth	2400.0 ... 2483.5 MHz	—	0.7	1.0	dB
Attenuation					
Antenna-GPS	824.0 ... 894.0 MHz	34	38	—	dB
Antenna-GPS	1750.0 ... 1990.0 MHz	34	39	—	dB
Antenna-GPS	2400.0 ... 2483.5 MHz	36	40	—	dB
VSWR (Antenna)					
Bluetooth band	2400.0 ... 2483.5 MHz	—	1.2	1.6	
GPS band	1574.42 ... 1576.42 MHz	—	1.4	1.8	
VSWR (GPS)					
GPS band	1574.42 ... 1576.42 MHz	—	1.4	1.8	
VSWR (Non-GPS)					
Bluetooth band	2400.0 ... 2483.5 MHz	—	1.2	1.5	
Isolation between Non GPS and GPS path					
Bluetooth band	2400.0 ... 2483.5 MHz	36	40	—	dB

¹⁾ PCB loss de-embedded
²⁾ 1.4 dB max. at 25 °C



SAW Components	B7742
SAW GPS Extractor Filter	1575.42 / 859.0 / 1810.0 / 1920.0 / 2441.75 MHz
Data Sheet	SMD

Maximum ratings

Operable temperature range	T	-30/+85	°C	
Storage temperature range	T _{stg}	-40/+85	°C	
DC voltage	V _{DC}	5	V	
ESD voltage	V _{ESD}	50 ¹⁾	V	machine model, 10 pulses
Input power at				
824 ... 894 MHz	P _{IN}	31	dBm	
1750 ... 1870 MHz	P _{IN}	31	dBm	effective power in the on-state
1850 ... 1990 MHz	P _{IN}	31	dBm	continuous wave signal
2400 ... 2483.5 MHz	P _{IN}	31	dBm	

¹⁾ acc. to JESD22-A115A (machine model), 10 negative & 10 positive pulses.



SAW Components

B7742


SAW GPS Extractor Filter

1575.42 / 859.0 / 1810.0 / 1920.0 / 2441.75 MHz


Data Sheet



Antenna - GPS (transfer function):

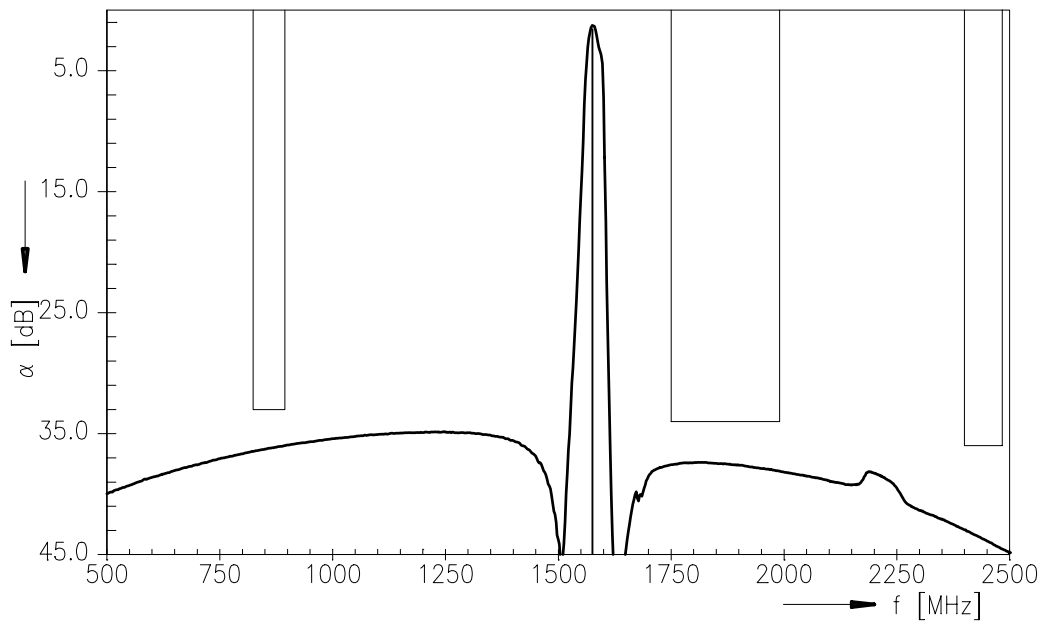

Antenna - GPS (transfer function passband, including PCB loss):

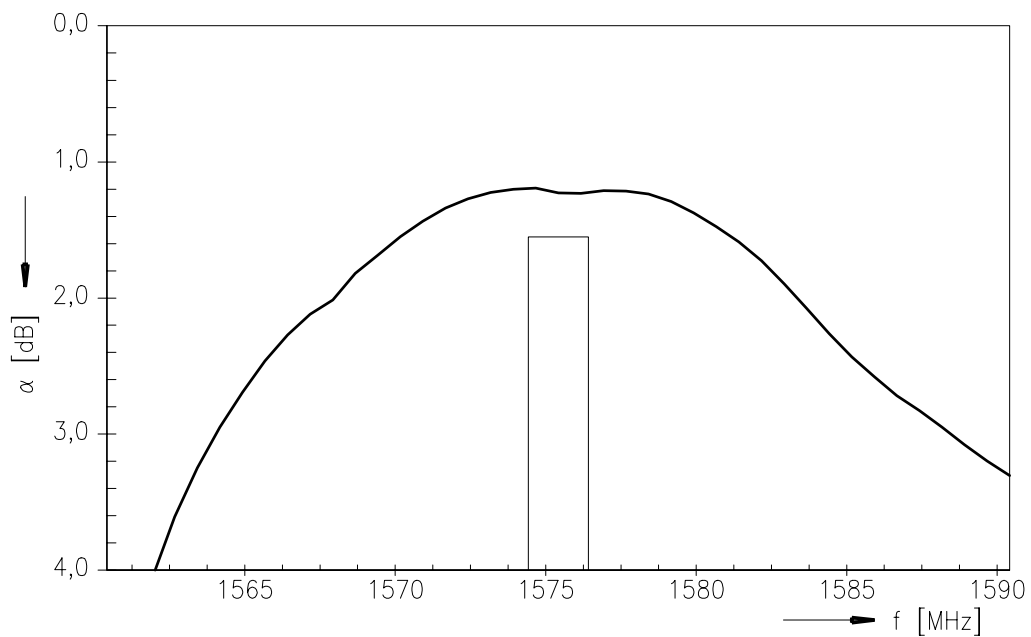



SAW Components

B7742


SAW GPS Extractor Filter

1575.42 / 859.0 / 1810.0 / 1920.0 / 2441.75 MHz


Data Sheet



Antenna - Cellular (transfer function, matching for Cellular, incl. PCB loss):

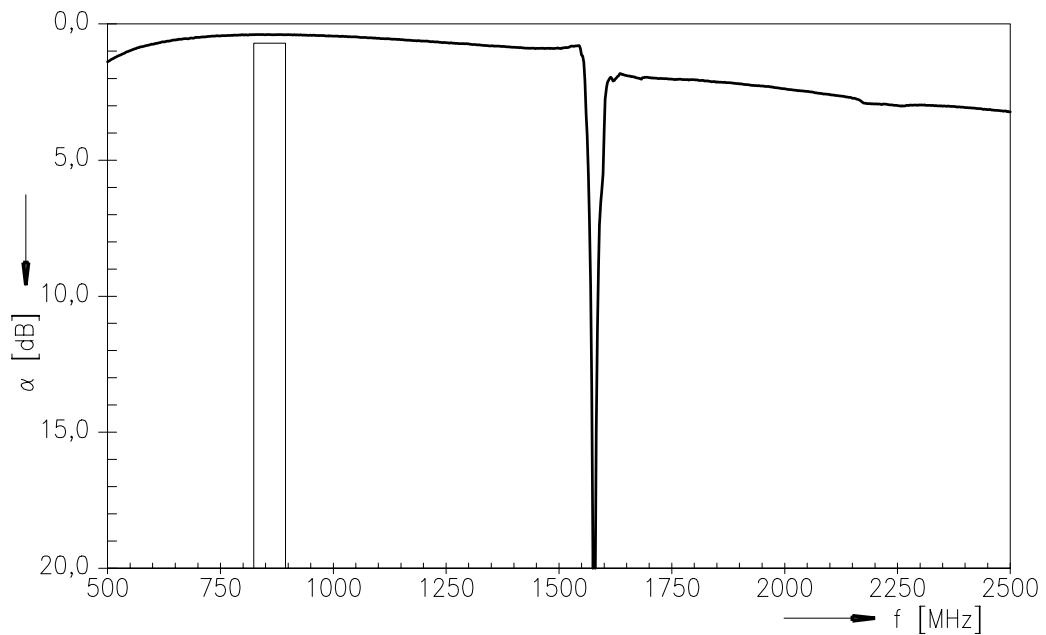

Antenna - Cellular (transfer function passband, matching for Cellular, incl. PCB loss):

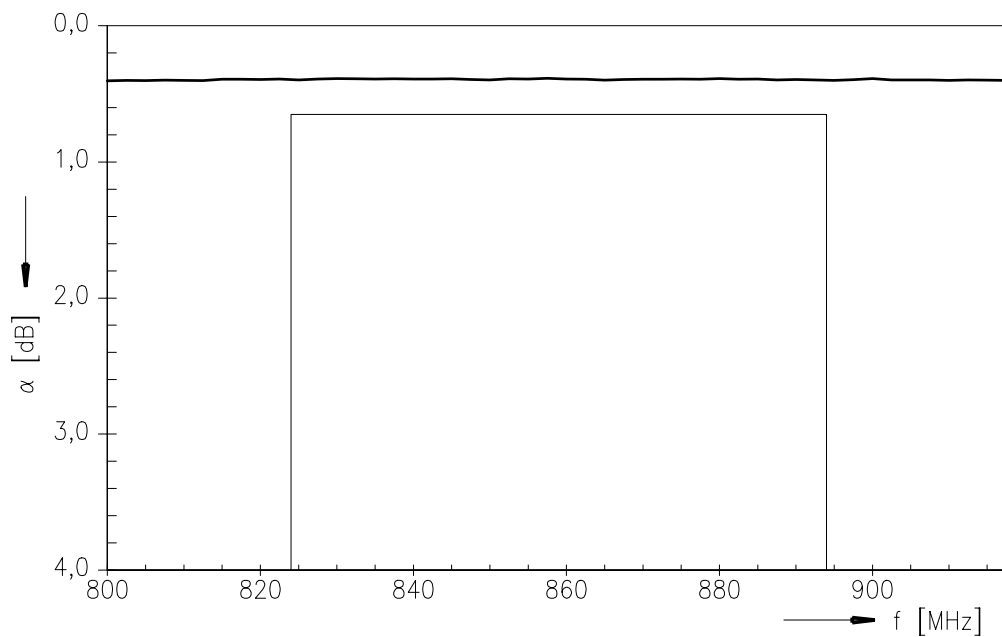



SAW Components

B7742


SAW GPS Extractor Filter

1575.42 / 859.0 / 1810.0 / 1920.0 / 2441.75 MHz


Data Sheet



Antenna - K-PCS (transfer function, matching for K-PCS, incl. PCB loss):

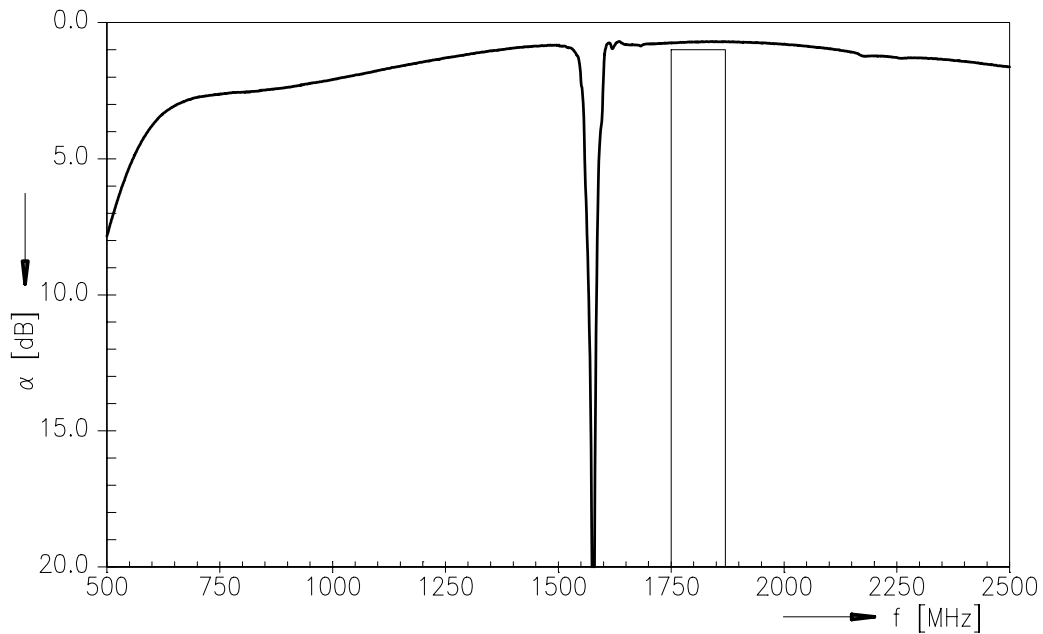

Antenna - K-PCS (transfer function passband, matching for K-PCS, incl. PCB loss):

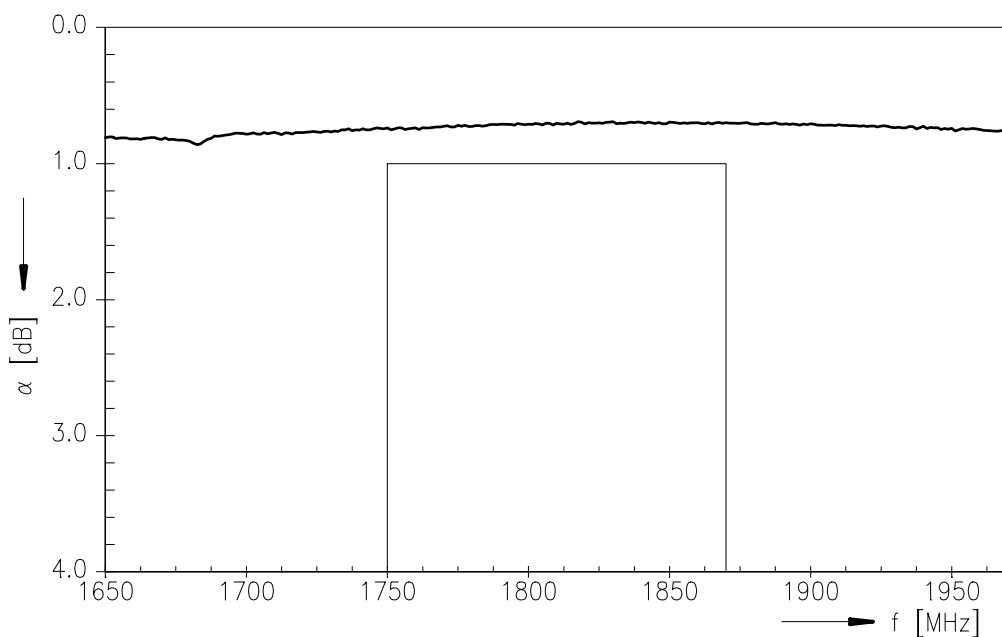



SAW Components

B7742


SAW GPS Extractor Filter

1575.42 / 859.0 / 1810.0 / 1920.0 / 2441.75 MHz


Data Sheet



Antenna - PCS (transfer function, matching for PCS, incl. PCB loss):

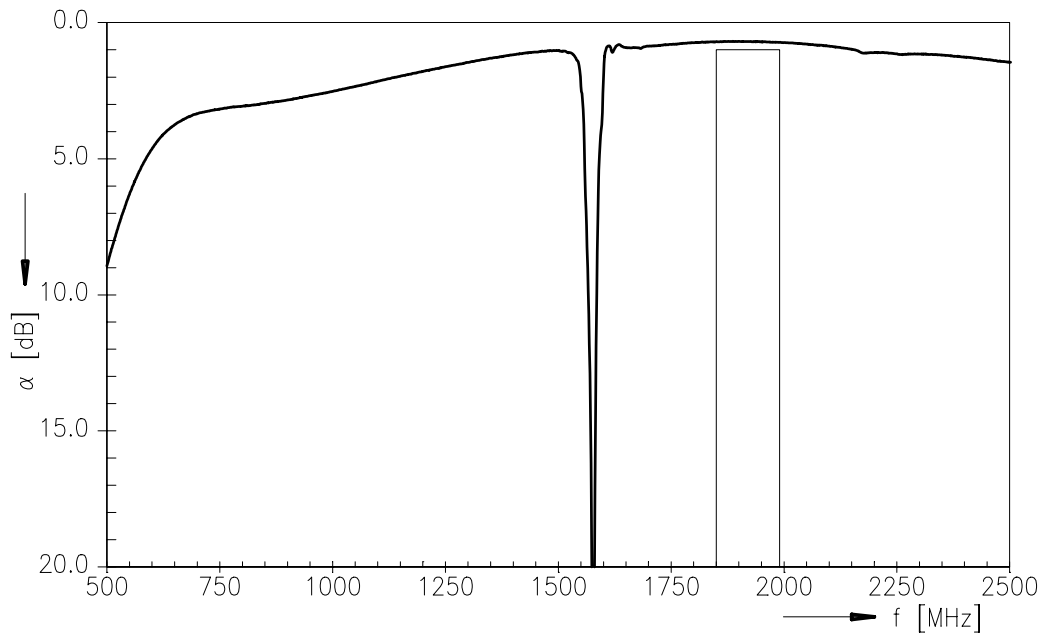

Antenna - PCS (transfer function passband, matching for PCS, incl. PCB loss):

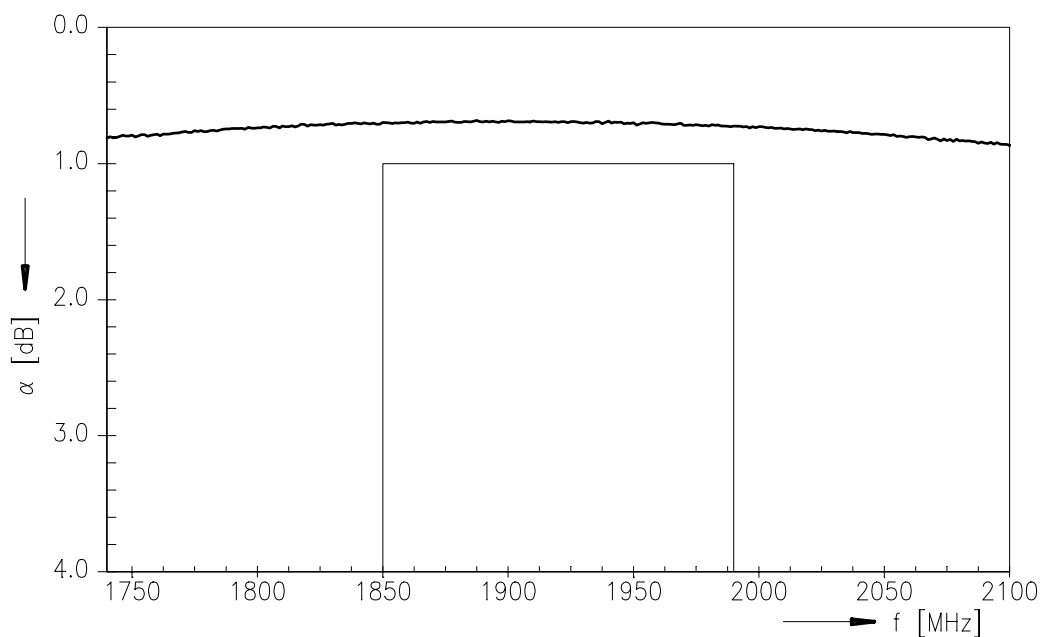



SAW Components

B7742


SAW GPS Extractor Filter

1575.42 / 859.0 / 1810.0 / 1920.0 / 2441.75 MHz


Data Sheet



Antenna - Bluetooth (transfer function, matching for Bluetooth, incl. PCB loss):

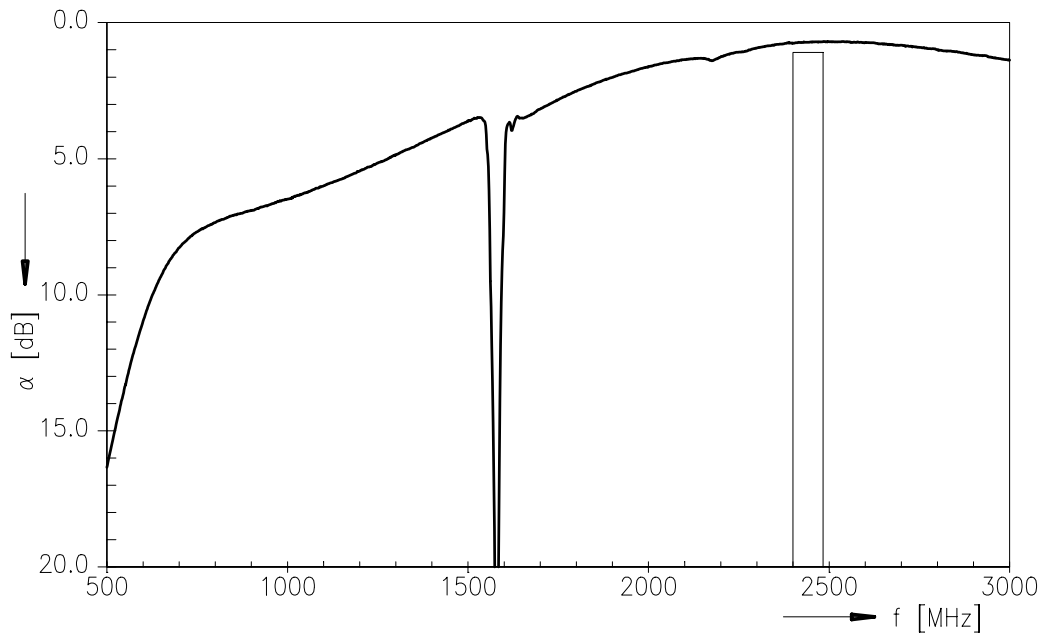

Antenna - Bluetooth (transfer function passband, matching for Bluetooth, incl. PCB loss):

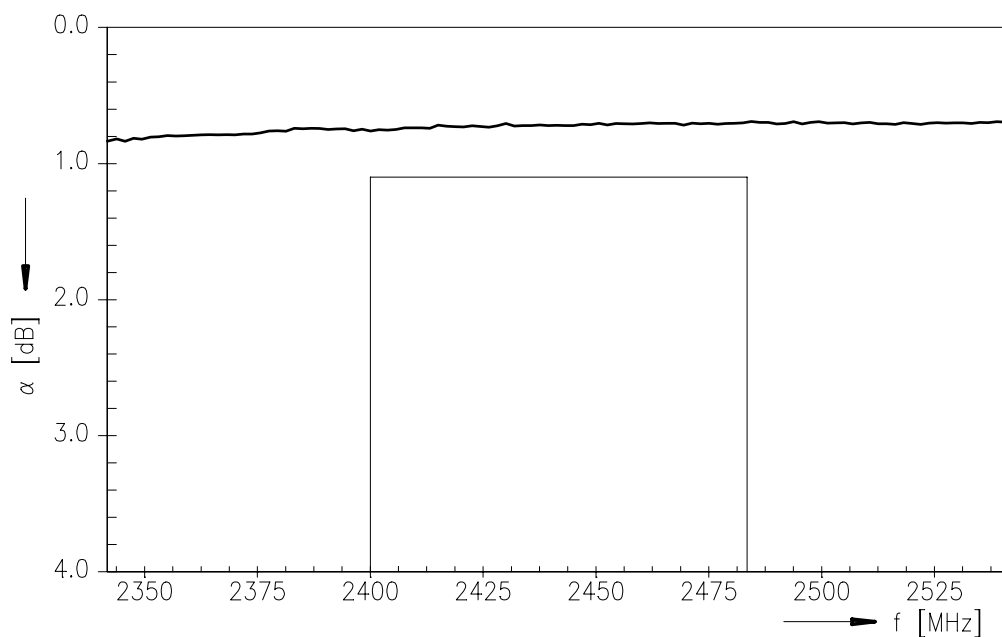



SAW Components

B7742


SAW GPS Extractor Filter

1575.42 / 859.0 / 1810.0 / 1920.0 / 2441.75 MHz


Data Sheet



Non GPS - GPS (Isolation, transfer function):

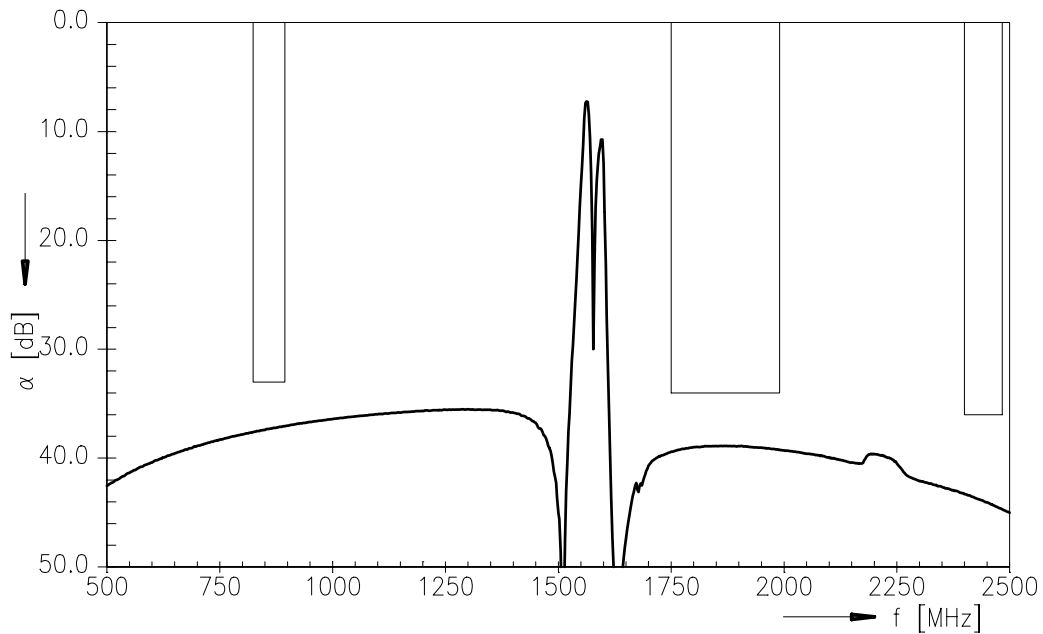

PCB loss (de-embedding curve)

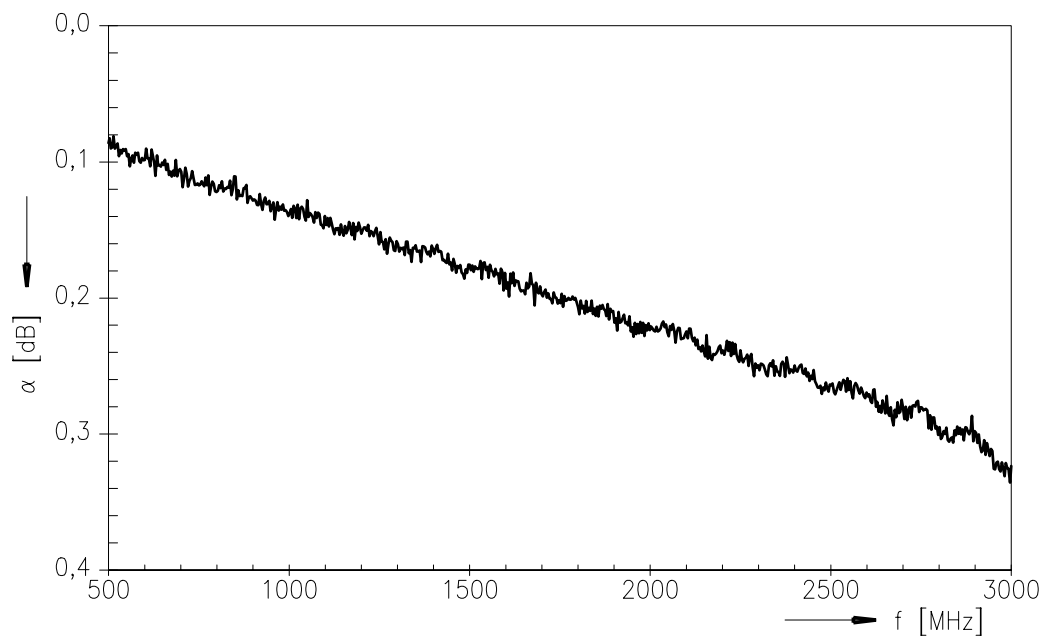



SAW Components

B7742

SAW GPS Extractor Filter



1575.42 / 859.0 / 1810.0 / 1920.0 / 2441.75 MHz

Data Sheet





Smith charts / VSWR (example for Bluetooth matching)



S₁₁ Antenna

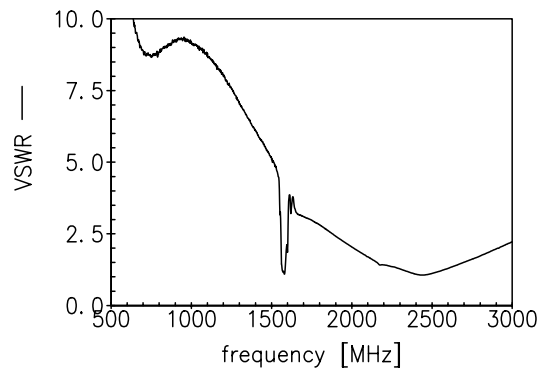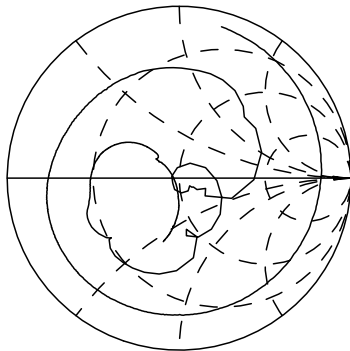

S₂₂ GPS

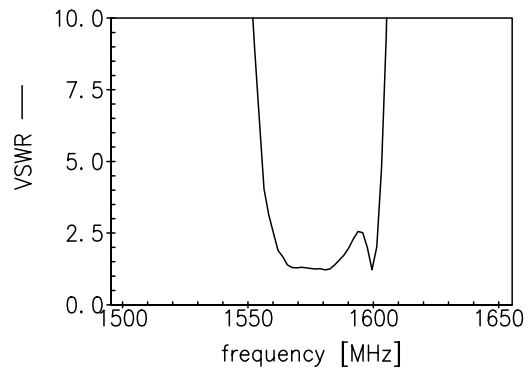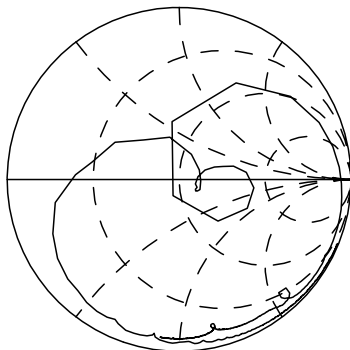

S₃₃ Non-GPS

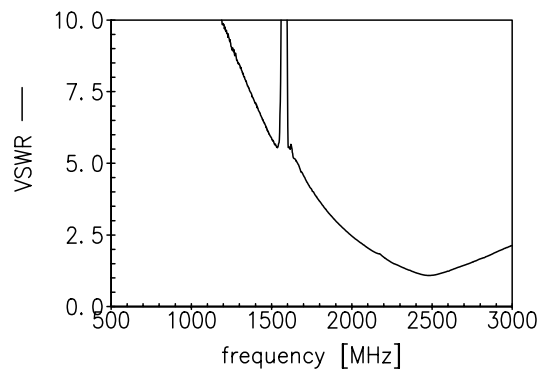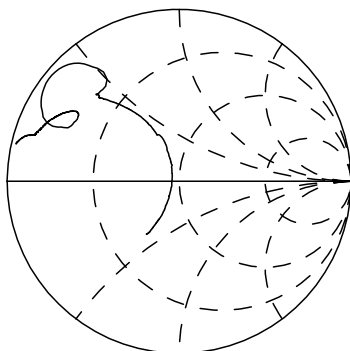



SAW Components	B7742
SAW GPS Extractor Filter	1575.42 / 859.0 / 1810.0 / 1920.0 / 2441.75 MHz
Data Sheet	

References

Type	B7742
Ordering code	B39162B7742E310
Marking and package	C61157-A7-A116
Packaging	F61074-V8153-Z000
Date codes	L_1126
S-parameters (unmatched)	B7742_NB.s3p B7742_WB.s3p
Soldering profile	S_6001
RoHS compatible	defined as compatible with the following documents: "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 2005/618/EC from April 18th, 2005, amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment."
Moldability	Before using in overmolding environment, please contact your EPCOS sales office.

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com .

**Published by EPCOS AG
Surface Acoustic Wave Components Division
P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2006. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.



Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. The warnings, cautions and product-specific notes must be observed.
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as "hazardous")**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, CeraDiode, CSSP, PhaseCap, PhaseMod, SIFI, SIKOREL, SilverCap, SIMID, SIOV, SIP5D, SIP5K, TOPcap, UltraCap, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.