



查询CMDA43供应商

INNOVATIVE TECHNOLOGIES, INC.
WHERE INNOVATION COMES TO LIGHT

捷多邦, 专业PCB打样工厂, 24小时加急出货

Americas

147 Central Avenue
Hackensack, NJ 07601
(201) 489-8989
www.cml-it.com

Europe

Robert Bunsen Str. 1
D-67098 Bad Dürkheim
+49 (6322) 9567-0
www.cml-it.com

CMDA43xx15D13L Series on Star PCB **CMDA44xx15D13L Series on Square PCB** **Power LED (1watt)** **Technical Datasheet**



CMDA43 and CMDA44 Power series is designed for high current operation and high flux output applications. Its thermal management characteristic are better than other LED solutions due to the SMD package design and good thermal emission material.

With these design advantages, it enables the Power LED to be applied in various lighting applications and design solution, automotive, architectural lighting, and large size LCD backlight etc.

Features

- Super high Flux output and high Luminance
- Designed for high current operation
- Low thermal resistance
- SMT solderability
- Lead Free product
- RoHS compliant


Application

- Mobile phone flash
- Automotive interior / exterior lighting
- Automotive signal lighting
- Automotive forward lighting
- General Lighting (Torch)
- Architectural lighting
- LCD TV / Monitor Backlight
- Projector light source
- Traffic Signals
- Task lighting
- Decorative / Pathway lighting
- Remote / Solar powered lighting
- Household appliances




1. Outline Dimensions

Dome Type

TOP VIEW

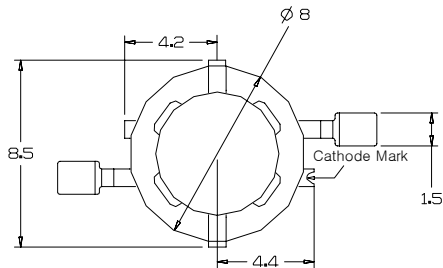

BOTTOM VIEW

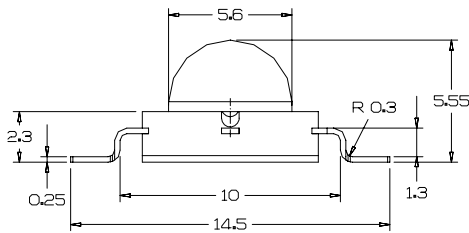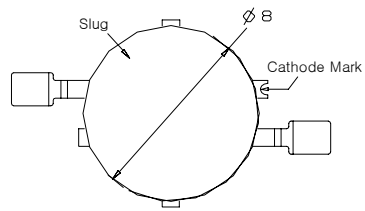


Notes :

1. All dimensions are in millimeters.
2. Scale : none
3. This drawing without tolerances are for reference only
4. Slug of package is connected to anode.


2. Metal PCB Outline Dimensions

Square Type

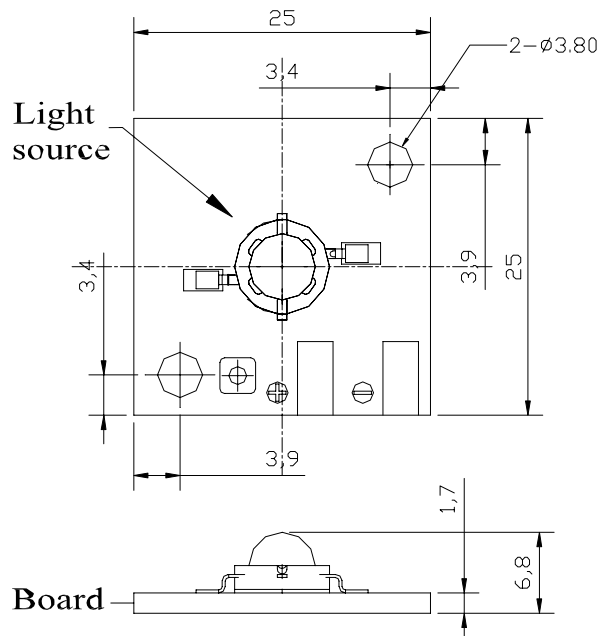

CMDA44xx15D13L
Square Configuration

Star Type

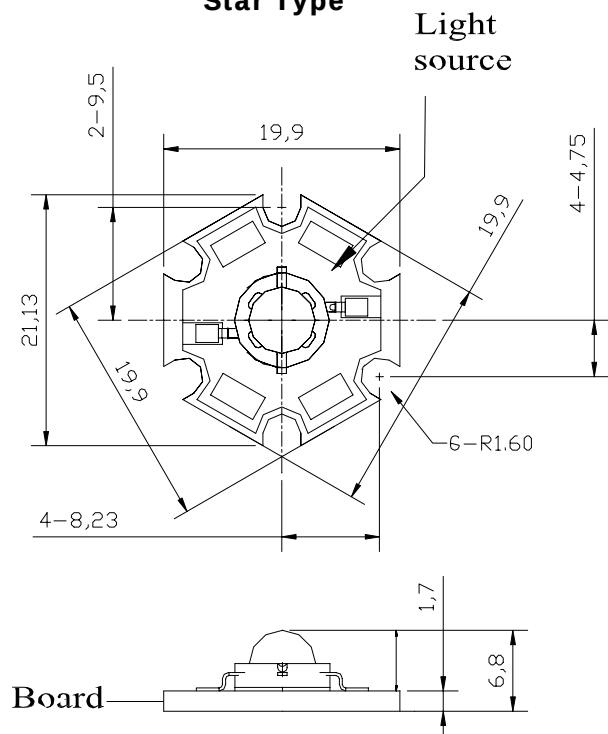

CMDA43xx15D13L
Star Configuration

Notes :

1. All dimensions are in millimeters.
2. Scale : none
3. This drawing without tolerances are for reference only



Americas
147 Central Avenue
Hackensack, NJ 07601
(201) 489-8989
www.cml-it.com

Europe
Robert Bunsen Str. 1
D-67098 Bad Dürkheim
+49 (6322) 9567-0
www.cml-it.com



CML INNOVATIVE TECHNOLOGIES, INC.
WHERE INNOVATION COMES TO LIGHT

Americas

147 Central Avenue
 Hackensack, NJ 07601
 (201) 489-8989
www.cml-it.com

Europe

Robert Bunsen Str. 1
 D-67098 Bad Dürkheim
 +49 (6322) 9567-0
www.cml-it.com

3. Electro-Optical Characteristics (at IF=350mA, TA=25°C)

CMDA43xx15D13L Star PCB series

P/N	Description	Luminous Flux Min./Typ. (lm)	Correlated Color Temperature (Kelvin)	CRI	Dominant Wavelength (nm) Min./Typ./Max.	Forward Voltage (volts) Min./Typ./Max.	View Angle (degrees)	Thermal resistance (°C /W)
	Symbol	ΦV [1]	CCT [3]	Ra	λD	V	2Θ 1/2	Rθ [4]
CMDA43CW15D13L	Pure White	32 / 52	6500	76		3.0 / 3.4 / 4.3	120	16
CMDA43WW15D13L	Warm White	24 / 35	3000	76		3.0 / 3.4 / 4.3	120	16
CMDA43CB15D13L	Blue	6 / 11			455 / 460 / 475	3.0 / 3.4 / 4.3	130	16
CMDA43AG15D13L	Green	24 / 48			520 / 527 / 535	3.0 / 3.4 / 4.3	130	16
CMDA43AR15D13L	Red	24 / 30			620 / 625 / 630	2.0 / 2.5 / 3.0	128	19
CMDA43GB15D13L	Cyan	24 / 40			500 / 505 / 510	3.0 / 3.4 / 4.3	130	16
CMDA43DY15D13L	Amber	24 / 38			585 / 590 / 595	2.0 / 2.5 / 3.0	128	19

4. Absolute Maximum Ratings (at TA=25°C)

P/N	Description	Forward Current (A)	Power Dissipation (Watts)	Junction Temperature (°C)	Operating Temperature (°C)	Storage Temperature (°C)
	Symbol	IF	PD	Tj	Topr	Tstg
CMDA43CW15D13L	Pure White	0.4	1.6	125	-30~+85	-40~+120
CMDA43WW15D13L	Warm White	0.4	1.6	125	-30~+85	-40~+120
CMDA43CB15D13L	Blue	0.4	1.6	125	-30~+85	-40~+120
CMDA43AG15D13L	Green	0.4	1.6	125	-30~+85	-40~+120
CMDA43AR15D13L	Red	0.4	1.2	100	-30~+85	-40~+120
CMDA43GB15D13L	Cyan	0.4	1.6	125	-30~+85	-40~+120
CMDA43DY15D13L	Amber	0.4	1.2	100	-30~+85	-40~+120

*Notes:

- [1] ΦV is the total luminous flux output as measured with an integrating sphere.
- [2] Zener diode chip included to protect the LED from ESD.
- [3] Rθ is measured with a metal core PCB (25 °C ≤ TJ ≤ 125 °C).
- [4] CML maintains a tolerance of ± 10% on flux and power measurements.
- [5] CCT ± 5% tester tolerance.
- [6] Color Coordinate Measurement allowance is ± 0.005
- [7] A tolerance of ± 0.006V on forward voltage measurements

-----Caution-----

Please do not drive at rated current more than 5 sec. without proper heat sink



Americas

147 Central Avenue
Hackensack, NJ 07601
(201) 489-8989
www.cml-it.com

Europe

Robert Bunsen Str. 1
D-67098 Bad Dürkheim
+49 (6322) 9567-0
www.cml-it.com

5. Electro-Optical Characteristics (at IF=350mA, TA=25°C)

CMDA44xx15D13L Square PCB series

P/N	Description	Luminous Flux Min./Typ. (lm)	Correlated Color Temperature (Kelvin)	CRI	Dominant Wavelength (nm) Min./Typ./Max.	Forward Voltage (volts) Min./Typ./Max.	View Angle (degrees)	Thermal resistance (°C /W)
	Symbol	ΦV [1]	CCT [3]	Ra	λD	V	2Θ 1/2	Rθ [4]
CMDA44CW15D13L	Pure White	32 / 52	6500	76		3.0 / 3.4 / 4.3	120	16
CMDA44WW15D13L	Warm White	24 / 35	3000	76		3.0 / 3.4 / 4.3	120	16
CMDA44CB15D13L	Blue	6 / 11			455 / 460 / 475	3.0 / 3.4 / 4.3	130	16
CMDA44AG15D13L	Green	24 / 48			520 / 527 / 535	3.0 / 3.4 / 4.3	130	16
CMDA44AR15D13L	Red	24 / 30			620 / 625 / 630	2.0 / 2.5 / 3.0	128	19
CMDA44GB15D13L	Cyan	24 / 40			500 / 505 / 510	3.0 / 3.4 / 4.3	130	16
CMDA44DY15D13L	Amber	24 / 38			585 / 590 / 595	2.0 / 2.5 / 3.0	128	19

6. Absolute Maximum Ratings (at TA=25°C)

P/N	Description	Forward Current (A)	Power Dissipation (Watts)	Junction Temperature (°C)	Operating Temperature (°C)	Storage Temperature (°C)
	Symbol	IF	PD	Tj	Topr	Tstg
CMDA44CW15D13L	Pure White	0.4	1.6	125	-30~+85	-40~+120
CMDA44WW15D13L	Warm White	0.4	1.6	125	-30~+85	-40~+120
CMDA44CB15D13L	Blue	0.4	1.6	125	-30~+85	-40~+120
CMDA44AG15D13L	Green	0.4	1.6	125	-30~+85	-40~+120
CMDA44AR15D13L	Red	0.4	1.2	100	-30~+85	-40~+120
CMDA44GB15D13L	Cyan	0.4	1.6	125	-30~+85	-40~+120
CMDA44DY15D13L	Amber	0.4	1.2	100	-30~+85	-40~+120

***Notes:**


- [1] ΦV is the total luminous flux output as measured with an integrating sphere.
- [2] Zener diode chip included to protect the LED from ESD.
- [3] Rθ is measured with a metal core PCB (25 °C ≤ TJ ≤ 125 °C).
- [4] CML maintains a tolerance of ± 10% on flux and power measurements.
- [5] CCT ± 5% tester tolerance.
- [6] Color Coordinate Measurement allowance is ± 0.005
- [7] A tolerance of ± 0.006V on forward voltage measurements

-----Caution-----


Please do not drive at rated current more than 5 sec. without proper heat sink

White color spectrum, $T_A = 25^\circ\text{C}$


1. Pure White

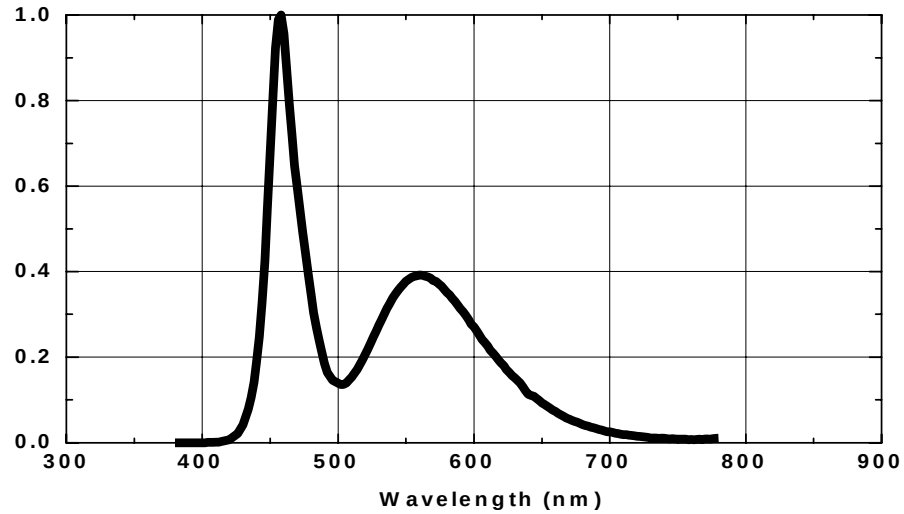

2. Warm White


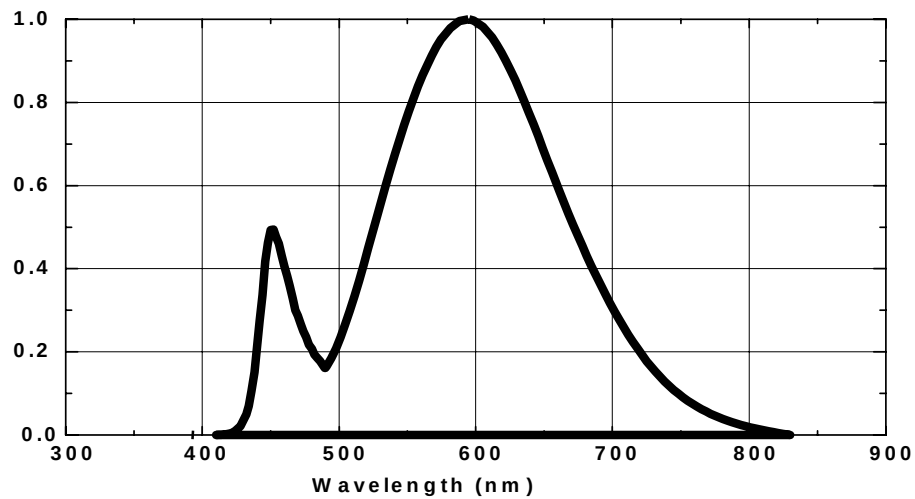


3. Blue, Cyan, Green, Amber, Red

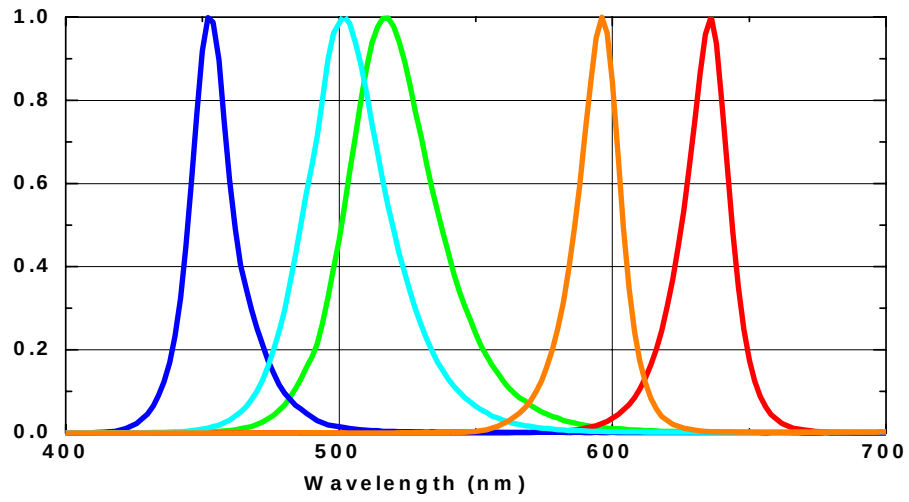



Light Output Characteristics

1. Relative Light Output vs. Junction Temperature at $I_F = 350\text{mA}$, $T_A = 25^\circ\text{C}$

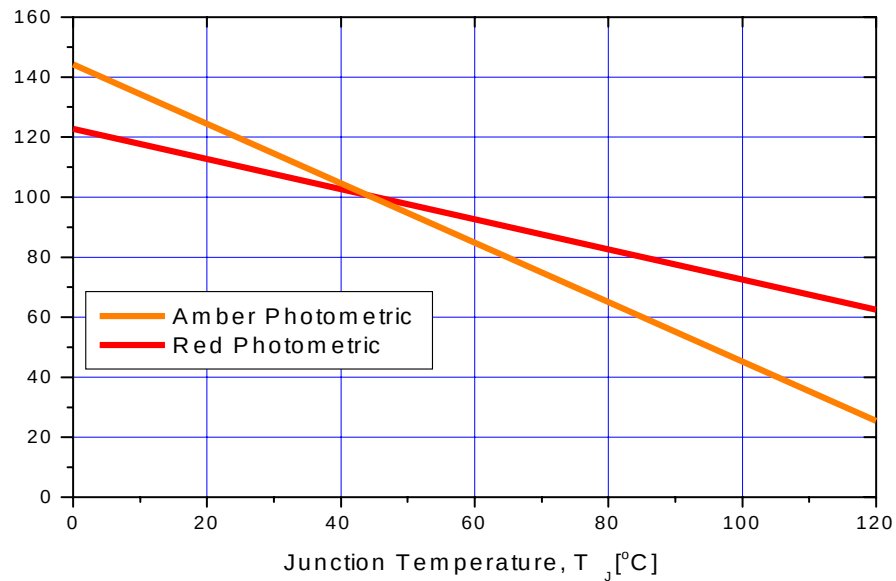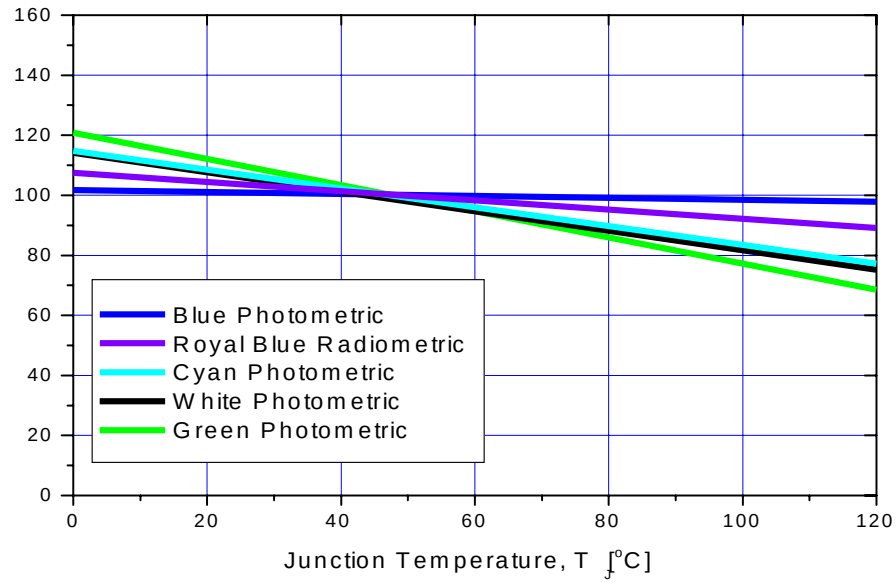


Forward Current Characteristics


1. Forward Voltage vs. Forward Current, $T_A = 25^\circ\text{C}$

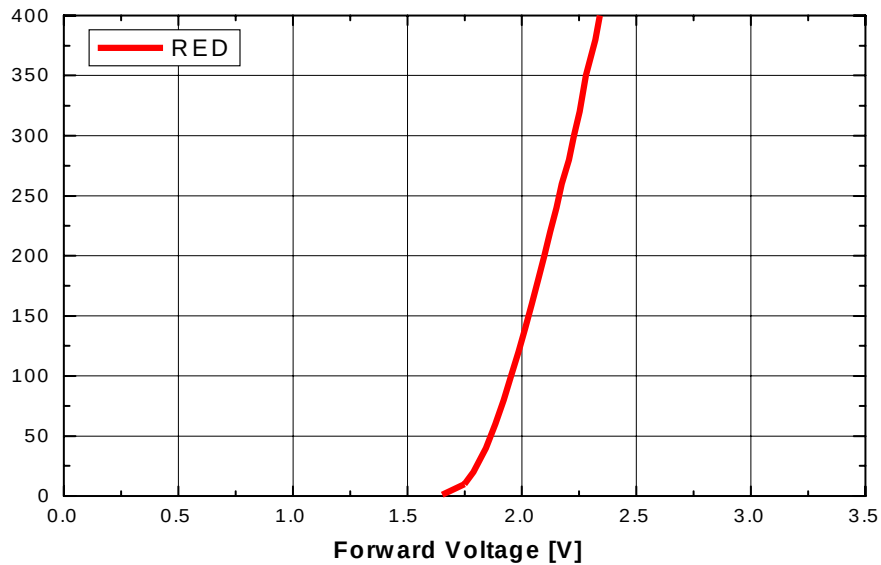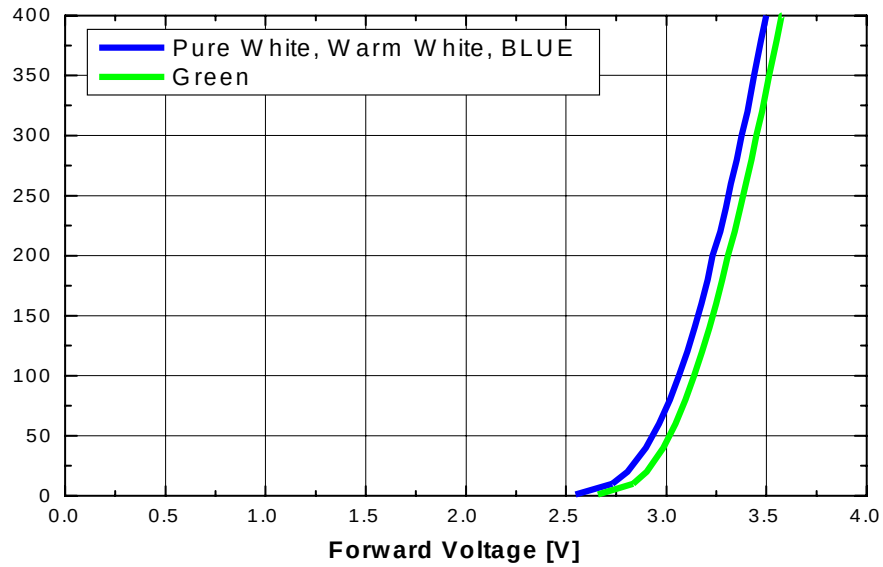

2. Forward Current vs. Normalized Relative Luminous Flux, $T_A = 25^\circ\text{C}$

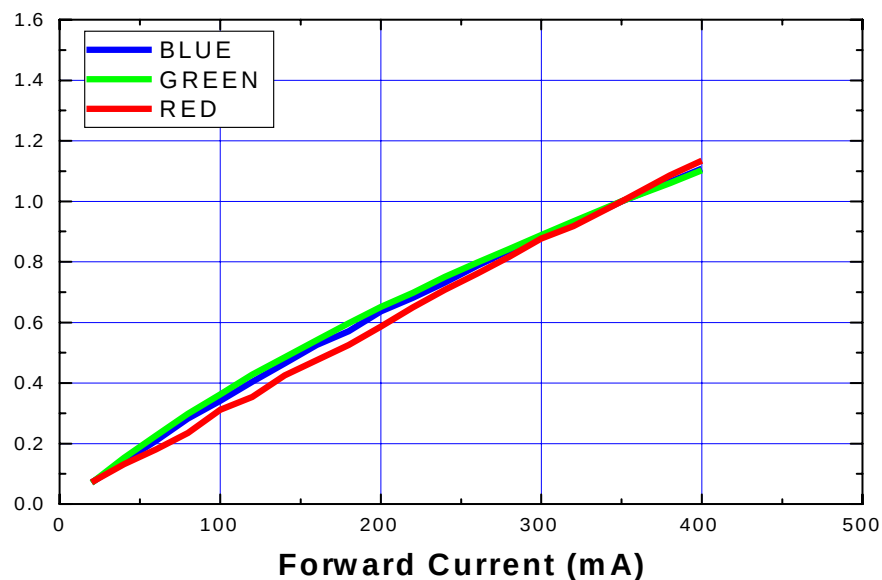


3. Forward Current vs. Wavelength shift, $T_A = 25^\circ\text{C}$

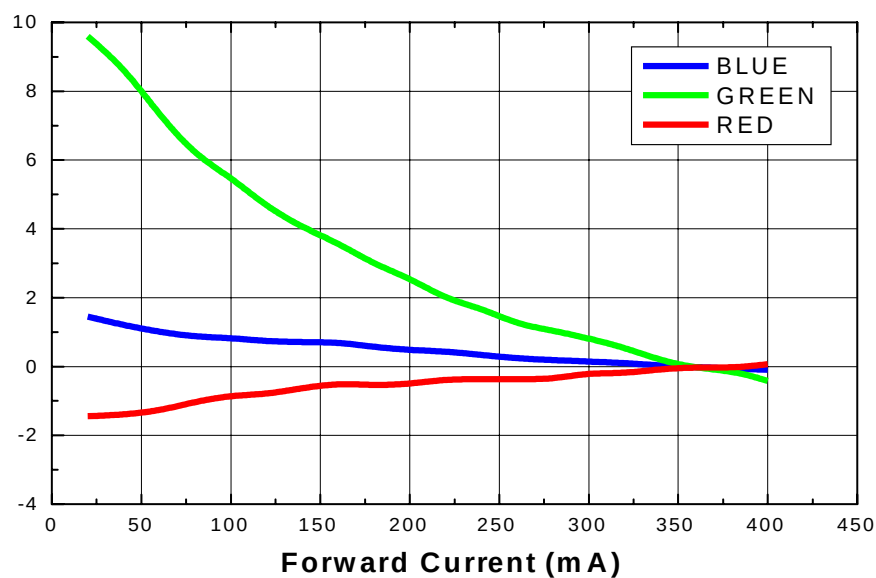


Ambient Temperature vs. Allowable Forward Current

1. Pure White, Warm White, Royal Blue, Blue, Cyan, Green ($T_{JMAX} = 125\text{ }^{\circ}\text{C}$)

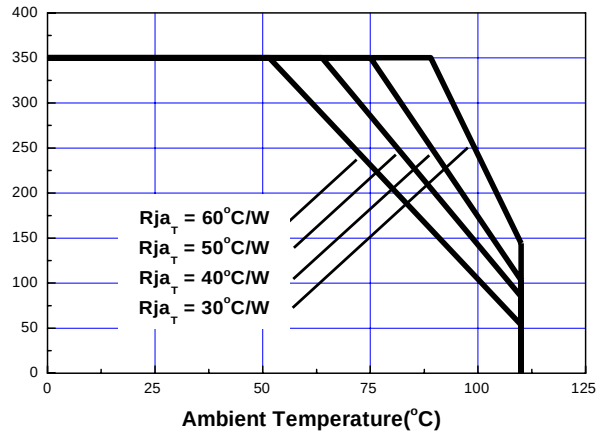


2. Amber, Red ($T_{JMAX} = 100\text{ }^{\circ}\text{C}$)

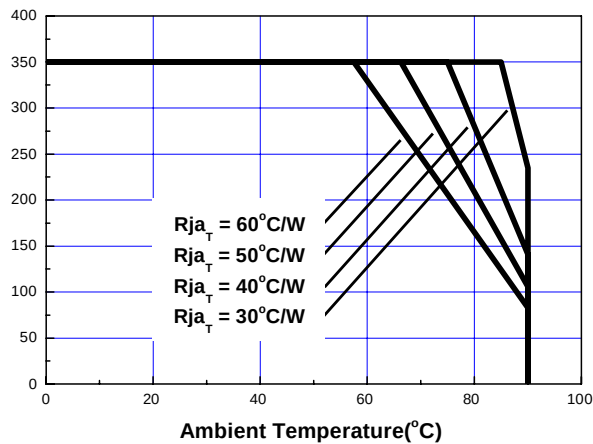


Typical Dome Type Radiation pattern


1. Pure White, Warm White

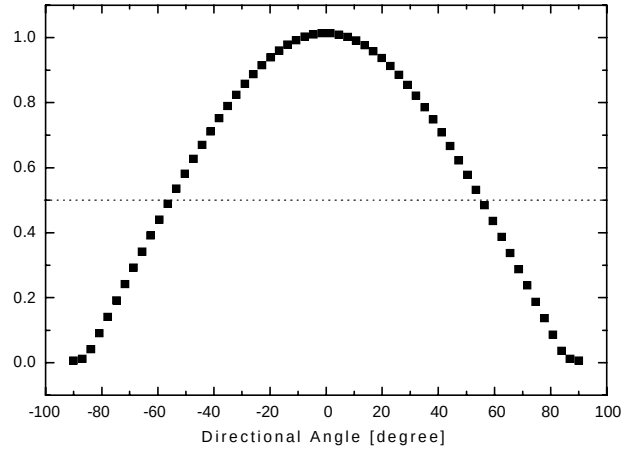




2. Royal Blue, Blue, Cyan, Green

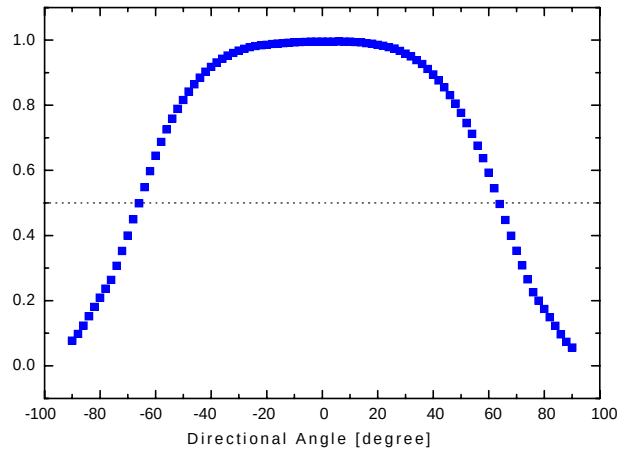

3. Amber, Red

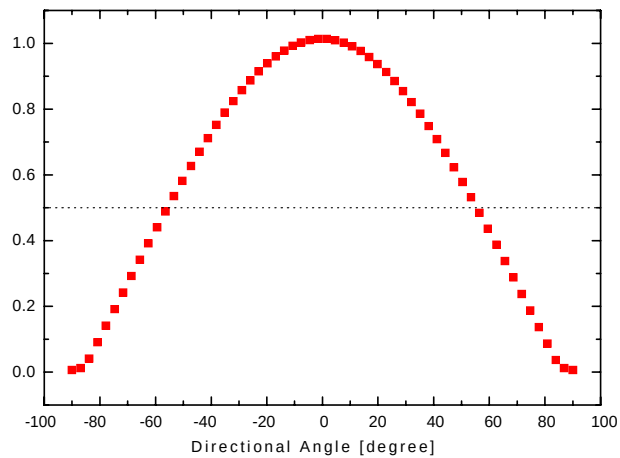

Recommended Solder pad

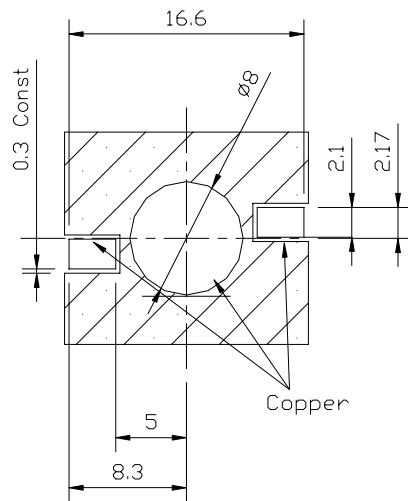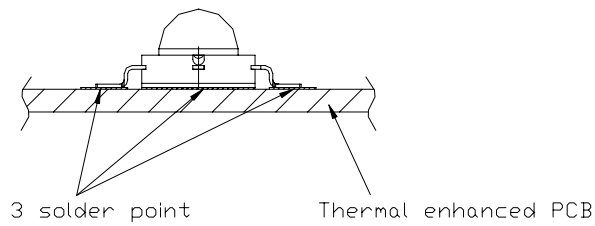


<Rear view>

<Footprint & Solder pad>


Note :

1. All dimensions are in millimeters
2. Scale none
3. This drawing without tolerances are for reference only

Metal PCB Type Reel Packaging - Star type

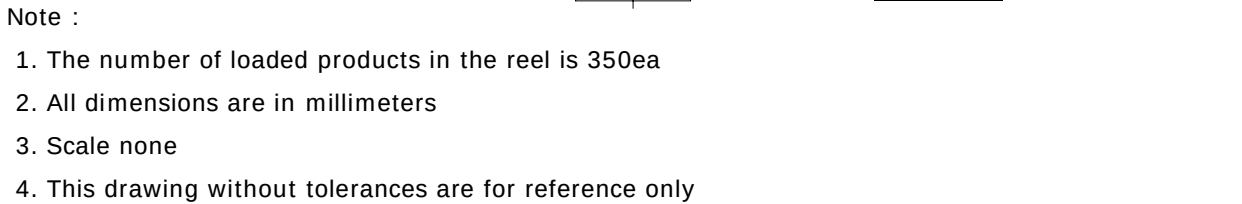

Metal PCB Type Reel Packaging - Square type

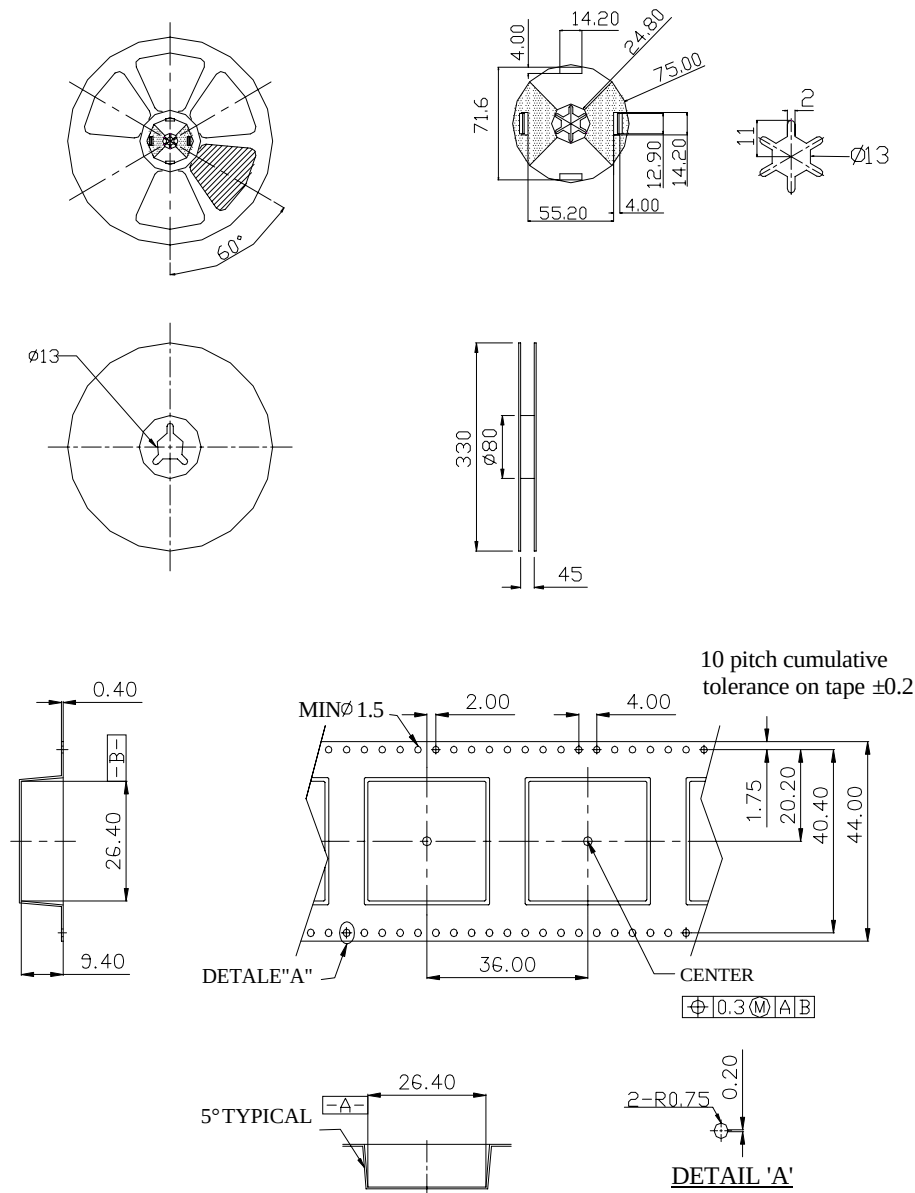


Note :

1. The number of loaded products in the reel is 200ea
2. All dimensions are in millimeters
3. Scale none
4. This drawing without tolerances are for reference only

Soldering profile, $T_A = 25^\circ\text{C}$

1. Reflow Soldering Conditions / Profile

Preliminary heating to be at 180°C max. for 2 minutes max. Soldering heat to be at 260°C max. for 5 seconds max.

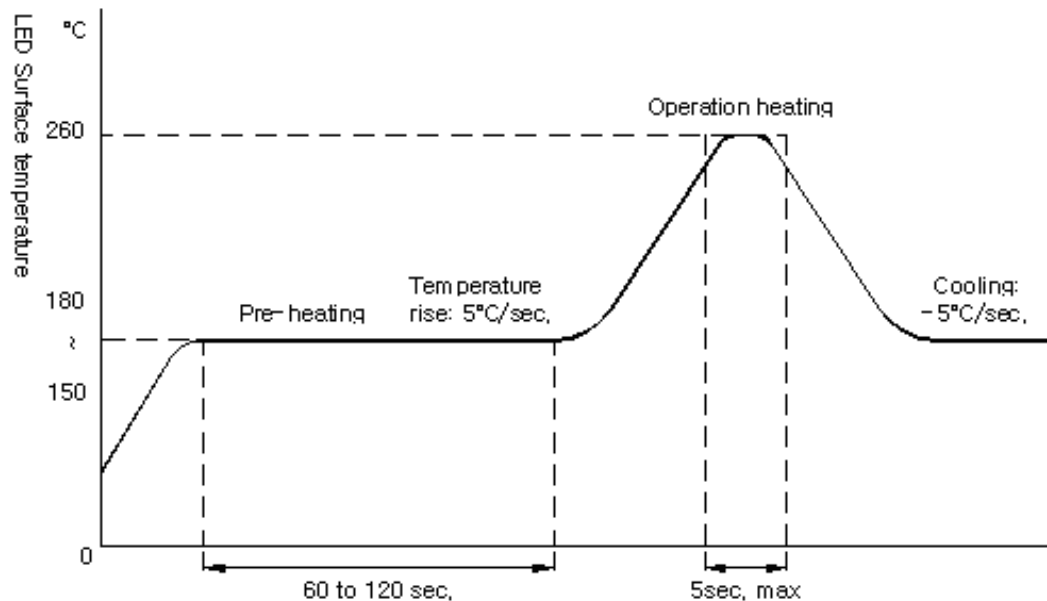

2. Hand Soldering conditions

Lead : Not more than 3 seconds @MAX 280°C
Slug : Use a thermal-adhesives

* Caution

No second soldering recommended