




2 x 5mm Rectangular LED Lamps

DESCRIPTION AND FEATURES

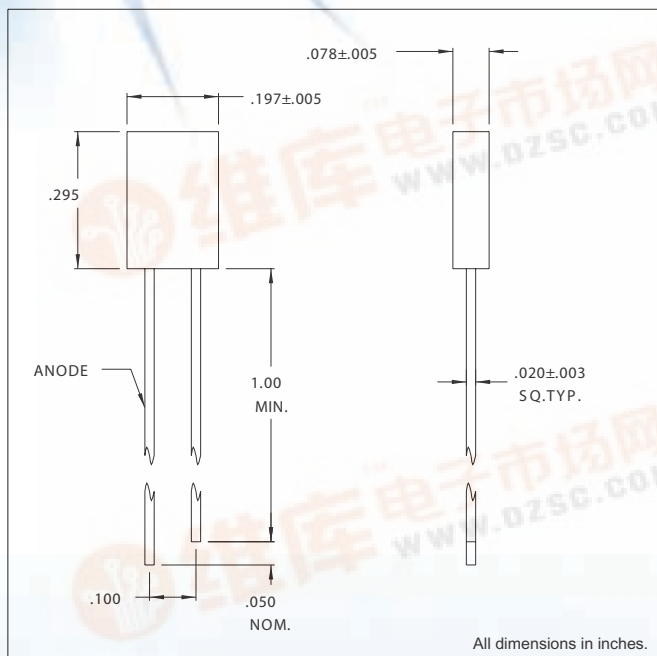

These rectangular LED lamps provide a 2 x 5mm lighted surface area. Stackable in X or Y direction, these lamps are typically used as legend backlighting, illuminated push buttons, panel indicators and bar graph meters. The High Efficiency Red and Yellow lamps are produced with GaAsP/GaP and the High Efficiency Green lamp is produced with GaP/GaP.

ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

PART NUMBER	CMD53123	CMD54123	CMD57123
Output Color	Yellow	H.E. Green	H.E. Red
Diffusion	Diffused	Diffused	Diffused
Package Color	Yellow	Green	Red
Test Current (mA)	20	20	20
Forward Voltage Typ. (V)	2.1	2.2	2.0
Forward Voltage Max. (V)	4.0	4.0	4.0
Luminous Intensity Min. (mcd)	1.0	1.0	1.0
Luminous Intensity Typ. (mcd)	4.0	4.0	4.0
Luminous Intensity Max. (mcd)	-	-	-
Peak Wavelength (nm)	585	562	635
Viewing Angle 20 1/2 (degrees)	100	100	100
Power Dissipation (mW)	120	120	120
Operating Temperature (°C)	-55 to +100	-55 to +100	-55 to +100
Storage Temperature (°C)	-55 to +100	-55 to +100	-55 to +100
Peak Forward Current Max.(1ms pulse width 300pps)(mA)	90	90	90
Reverse Voltage (IR=100µA) (V)	5	5	5
Lead Solder Time @ 260°C	5	5	5



America:
CML Innovative Technologies, Inc.
147 Central Avenue
Hackensack, NJ 07601 -USA
Tel: 1-201-489-8989
Fax: 1-201-489-6911
e-mail: americas@cml-it.com

Europe:
CML Technologies GmbH & Co. KG
Robert-Bunsen-Str.1
67098 Bad Dürkheim -GERMANY
Tel: +49 (0)6322 9567-0
Fax: +49 (0)6322 9567-88
e-mail: europe@cml-it.com

Asia:
CML Innovative Technologies, Inc.
61 Aida Street
Singapore 459975
Tel: (65)9630-5003
e-mail: asia@cml-it.com