


# Photoelectrics Fibre Optics, Plastic, Economy Line Types AFET, AFED

CARLO GAVAZZI

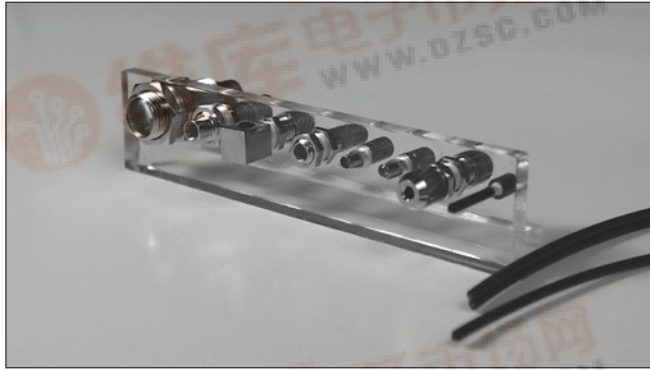

- Fibre diameter  $\varnothing 1$ , outer diameter  $\varnothing 2.2$
- Bending radius 25 mm
- For use with PD40 and PD60 series
- Nickel-plated brass detection heads

## Type Selection

Distance [mm]		Dimensions [mm]	Ordering no.	Distance [mm] <sup>1)</sup>		Dimensions [mm]	Ordering no.
PD40	PD60			PD40	PD60		
100	200		AFET 01 SC	500	1200		AFET 05 SC
400	800		AFET 02 SC	1500	4000		AFET 06 SC
600	1200		AFET 03 SC	-	-		AFET 07 SC
40	70		AFED 04 SC	1) Distance at 2 m fibre length			

## Ordering Key

**AFET 01 SC**

Optic Fibre \_\_\_\_\_

Fibre material \_\_\_\_\_  
P Plastic, PMMA

Fibre type \_\_\_\_\_  
D Diffuse  
T Through-beam

Sensor head 01-99 \_\_\_\_\_  
Forthrunning type number

Sheath material \_\_\_\_\_  
S Standard plastic, Polyethylene

Fibre diameter \_\_\_\_\_  
1.0 mm

