

NAIS

GU (General Use)-E Type 1-Channel (Form A) 4-pin Type

PhotoMOS RELAYS

FEATURES

1. Reinforced insulation 5,000 V type

More than 0.4 mm internal insulation distance between inputs and outputs. Conforms to EN41003, EN60950 (reinforced insulation).

2. Compact 4-pin DIP size

The device comes in a compact (W)6.4×(L)4.78×(H)3.2mm (W).252×(L).188×(H).126inch, 4-pin DIP size.

3. Controls low-level analog signals

PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

4. High sensitivity, low ON resistance

Can control a maximum 0.13 A load current with a 5 mA input current. Low ON re-


sistance of 25Ω (AQY210EH). Stable operation because there are no metallic contact parts.

5. Low-level off state leakage current


The SSR has an off state leakage current of several milliamperes, whereas the PhotoMOS relay has only 100 pA even with the rated load voltage of 350 V (AQY210EH).

TYPICAL APPLICATIONS

- Modem
- Telephone equipment
- Security equipment
- Sensors

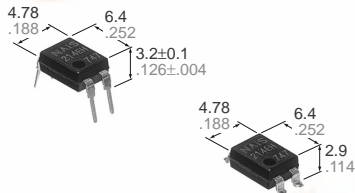

mm inch



TYPES

Type	I/O isolation voltage	Output rating*		Part No.				Packing quantity	
				Through hole terminal	Surface-mount terminal				
		Load voltage	Load current	Tube packing style		Tape and reel packing style		Tube	Tape and reel
		Picked from the 1/2-pin side	Picked from the 3/4-pin side						
AC/DC type	Reinforced 5,000 V	350 V	130 mA	AQY210EH	AQY210EHA	AQY210EHAX	AQY210EHAZ	1 tube contains 100 pcs. 1 batch contains 1,000 pcs.	1,000 pcs.
		400 V	120 mA	AQY214EH	AQY214EHA	AQY214EHAX	AQY214EHAZ		

*Indicate the peak AC and DC values.

Note: For space reasons, the initial letters of the product number "AQY", the SMD terminal shape indicator "A" and the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Sym-bol	AQY210EH (A)		AQY214EH (A)	Remarks
Input	LED forward current	I _F	50mA			
	LED reverse voltage	V _R	3V			
	Peak forward current	I _{FP}	1A			f =100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}	75mW			
Output	Load voltage (peak AC)	V _L	350 V		400 V	
	Continuous load current	I _L	0.13 A		0.12 A	
	Peak load current	I _{peak}	0.4 A		0.3 A	100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}	500mW			
Total power dissipation		P _T	550mW			
I/O isolation voltage		V _{iso}	5,000 V AC			
Temperature limits	Operating	T _{opr}	-40°C to +85°C -40°F to +185°F			Non-condensing at low temperatures
	Storage	T _{stg}	-40°C to +100°C -40°F to +212°F			

AQY210EH


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQY210EH (A)	AQY214EH (A)	Condition
Input	LED operate current	Typical	I _{Fon}	1.2mA		I _L =Max.
		Maximum		3.0mA		
	LED turn off current	Minimum	I _{Foff}	0.4mA		I _L =Max.
		Typical		1.1mA		
	LED dropout voltage	Typical	V _F	1.14 (1.25 V at I _F =50mA)		I _F =5mA
		Maximum		1.5V		
Output	On resistance	Typical	R _{on}	18Ω	26Ω	I _F =5mA I _L =Max. Within 1 s on time
		Maximum		25Ω	35Ω	
	Off state leak-age current	Maximum	I _{Leak}	1μA		I _F =0 V _L =Max.
Transfer char-acteristics	Turn on time*	Typical	T _{on}	0.5ms		I _F =5mA
		Maximum		2.0ms		I _L =Max.
	Turn off time*	Typical	T _{off}	0.08ms		I _F =5mA
		Maximum		1.0ms		I _L =Max.
	I/O capacitance	Typical	C _{iso}	0.8pF		f =1MHz
		Maximum		1.5pF		V _B =0
Initial I/O isola-tion resistance	Minimum	R _{iso}	1,000MΩ		500V DC	

Note: Recommendable LED forward current $I_F=5$ to 10mA.

For type of connection, see page 31.

*Turn on/Turn off time

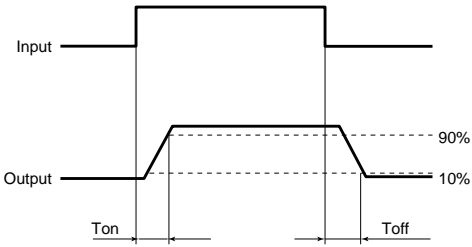


- For Dimensions, see Page 27.
- For Schematic and Wiring Diagrams, see Page 31.
- For Cautions for Use, see Page 36.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

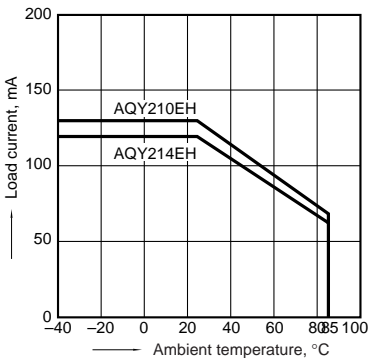


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

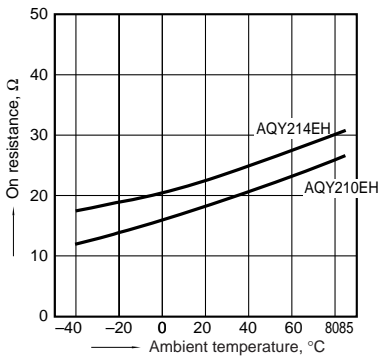


3. Turn on time vs. ambient temperature characteristics

Sample: All types
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

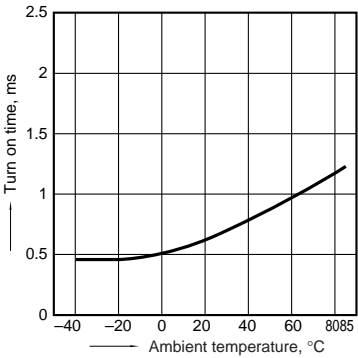


4. Turn off time vs. ambient temperature characteristics

Sample: All types; LED current: 5 mA; Load voltage: Max. (DC); Max. (DC); Continuous load current: Max. (DC)

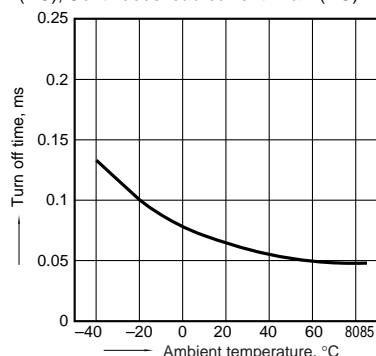


5. LED operate current vs. ambient temperature characteristics

Sample: All types; Load voltage: Max. (DC); Continuous load current: Max. (DC)

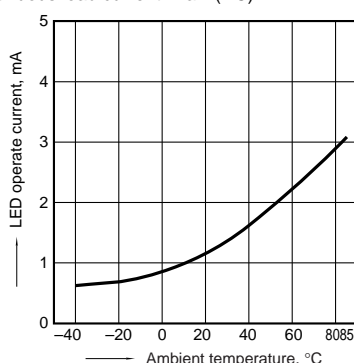


6. LED turn off current vs. ambient temperature characteristics

Sample: All types; Load voltage: Max. (DC); Continuous load current: Max. (DC)

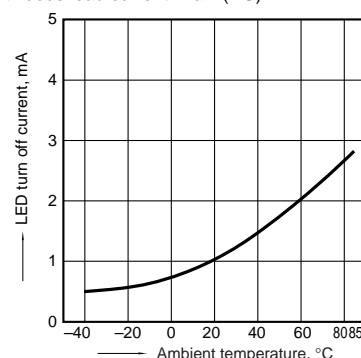


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types; LED current: 5 to 50 mA

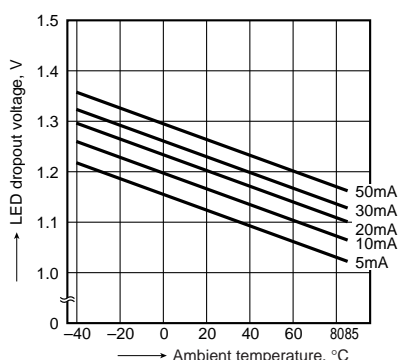


8. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 3 and 4; Ambient temperature: 25°C 77°F




9. Off state leakage current

Measured portion: between terminals 3 and 4; Ambient temperature: 25°C 77°F

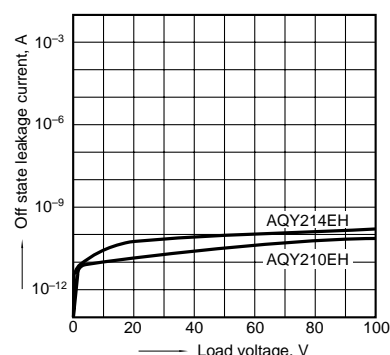


10. LED forward current vs. turn on time characteristics

Sample: All types
Measured portion: between terminals 3 and 4;
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

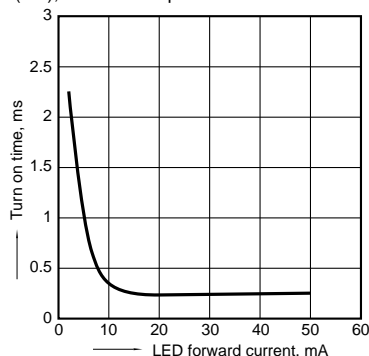

11. LED forward current vs. turn off time characteristics

Sample: All types
Measured portion: between terminals 3 and 4;
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

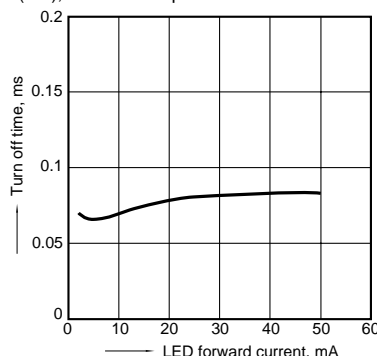

12. Applied voltage vs. output capacitance characteristics

Sample: All types
Measured portion: between terminals 3 and 4;
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

