

Bulletin PD-21124 04/06

# International IOR Rectifier

## BAT54APbF

SCHOTTKY DIODE

0.2 Amp

$I_{F(AV)} = 0.2\text{Amp}$   
 $V_R = 30\text{V}$

### Major Ratings and Characteristics



Characteristics	Value	Units
$I_F$ (DC)	0.2	A
$V_{RRM}$	30	V
$I_{FSM}$ @ $t_p = 10\text{ms}$ sine	1.0	A
$V_F$ @ 30mA DC, $T_J = 25^\circ\text{C}$	0.5	V
$P_d$ PowerDissipation @ $T_A = 25^\circ\text{C}$	200	mW
$T_J$ range	-65 to 150	$^\circ\text{C}$

### Description/ Features

This Schottky barrier diode is designed for high speed switching application, voltage clamping and circuit protection. Miniature surface mount packages with reduced foot print are excellent for portable application where space is limited

- Small foot print, surface mountable
- Very low forward voltage drop
- Extremely fast switching speed for high frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free ("PbF" suffix)

### Case Styles



SOT23

Voltage Ratings

Part number	Value
V <sub>R</sub> Max. DC Reverse Voltage (V)	30
V <sub>RWM</sub> Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	Value	Units	Conditions
I <sub>F</sub> Forward Current	0.2	A	DC, per Leg
I <sub>FSM</sub> Max. Peak One Cycle Non-Repetitive Surge Current, @T <sub>J</sub> =25°C	8.4	A	5µs Sine or 3µs Rect. pulse
	1.0	A	10ms Sine or 6ms Rect. pulse

Following any rated load condition and with rated V<sub>RWM</sub> applied

Electrical Specifications

Parameters	Value	Units	Conditions
V <sub>FM</sub> Max. Forward Voltage Drop (1)	0.24	V	@ 0.1mA
	0.32	V	@ 1mA
V <sub>FM</sub> Max. Forward Voltage Drop (1)	0.40	V	@ 10mA
	0.50	V	@ 30mA
	0.65	V	@ 100mA
I <sub>RM</sub> Max. Reverse Leakage Current (1)	2	µA	V <sub>R</sub> = 25V
	3	µA	V <sub>R</sub> = 30V
C <sub>T</sub> Max. Junction Capacitance	10	pF	V <sub>R</sub> = 1V <sub>DC</sub> (test signal range 100KHz to 1Mhz), T <sub>J</sub> = 25°C
dv/dt Max. Voltage Rate of Change (Rated V <sub>R</sub> )	10000	V/µs	

(1) Pulse Width < 300µs, Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	Value	Units	Conditions
T <sub>J</sub> Max. Junction Temperature Range(*)	-65 to 150	°C	
T <sub>stg</sub> Max. Storage Temperature Range	-65 to 150	°C	
R <sub>th(j-a)</sub> Max. Thermal Resistance Junction to Ambient	500	°C/W	Mounted on PC board FR4 with minimum pad size
Wt Approximate Weight	0.008	gr	
Case Style	SOT23		
Device Marking	FYWLC		

(\*)  $\frac{dP_{tot}}{dT_J} < \frac{1}{R_{th(j-a)}}$  thermal runaway condition for a diode on its own heatsink

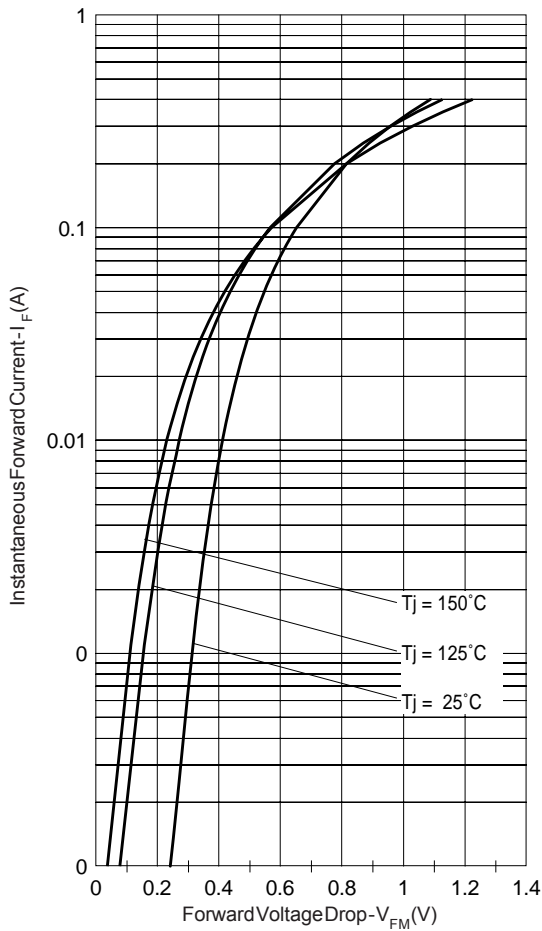


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

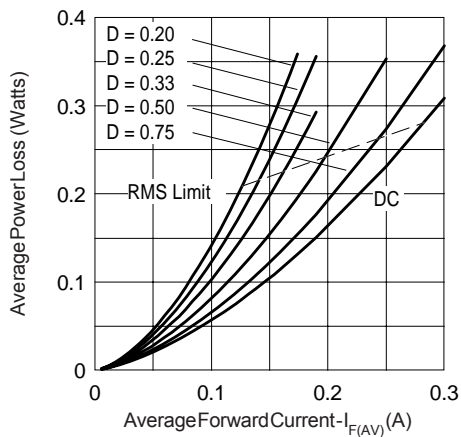


Fig. 4 - Forward Power Loss Characteristics

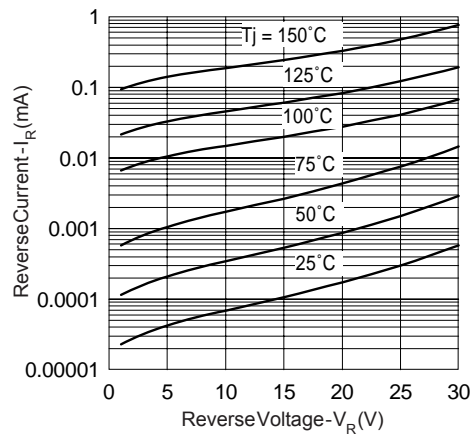


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

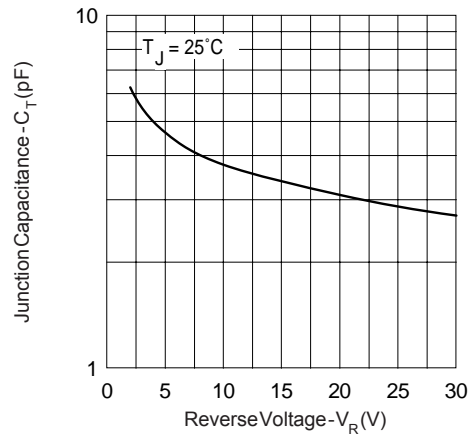


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)



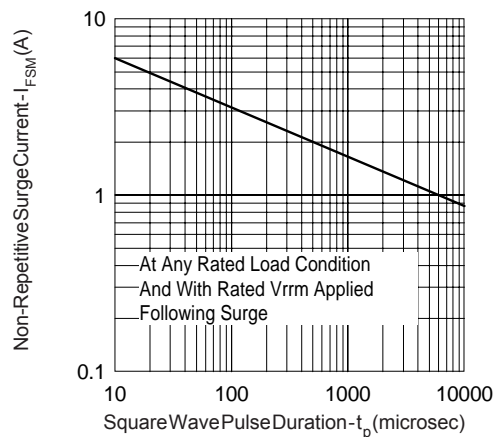


Fig. 5 - Max. Non-Repetitive Surge Current

Outline Table

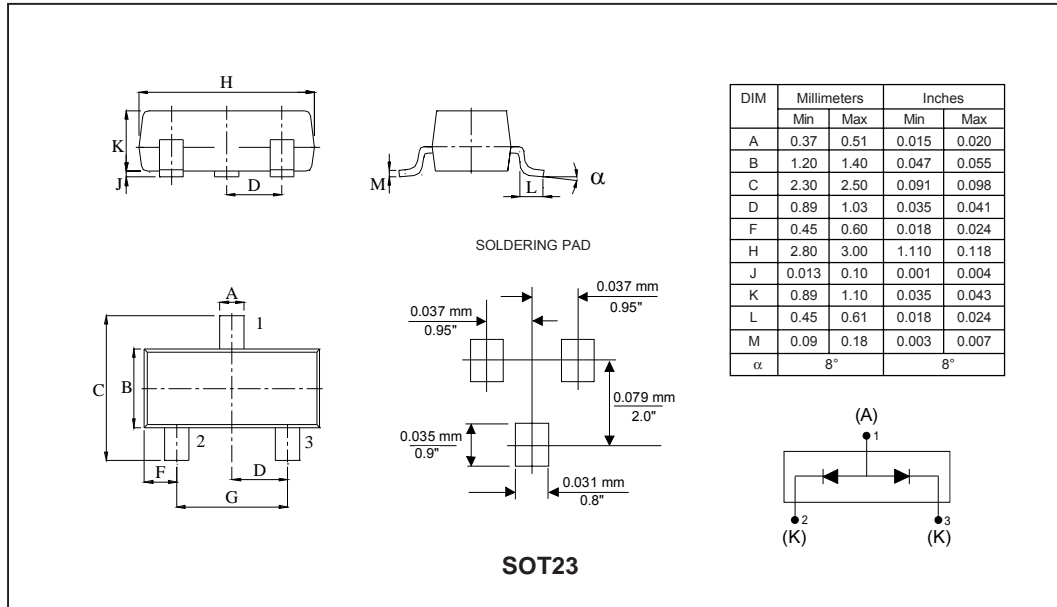

Tape & Reel Information

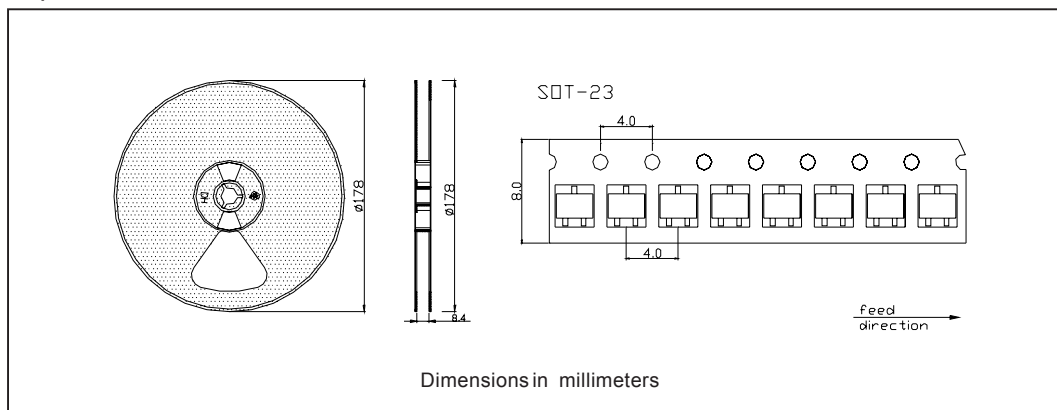

Ordering Information Table

Device	Package	Marking	Configuration	Base qty	Delivery mode
BAT54A	SOT-23	FYWLC	Dual C. Anode	3000	Tape & Reel

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level and Lead-Free.  
Qualification Standards can be found on IR's Web site.

International  
**IOR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 04/06