


MODEL BCN31

R/2R Ladder Network

8 Bit, 2512 Size

Thick Film

Leadless Chip Packages

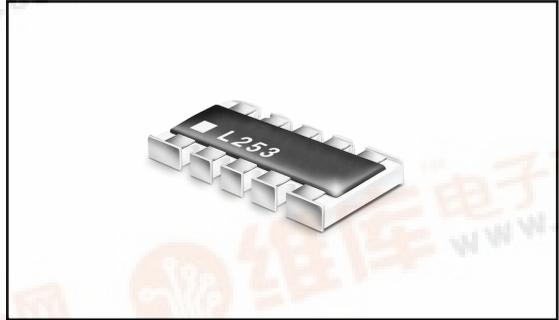

FEATURES

- 8 bit ladder network in a 10 terminal leadless chip package
- Convex termination with square edges and corners
- Topside marking for easy identification
- Solder plated termination with nickel barrier

BENEFITS

- Saves board space
- Reduces cost
- Single component reliability
- Leadless package offers improved performance

APPLICATIONS

- Termination network in analog to digital and digital to analog conversion circuits

ELECTRICAL


Standard Resistance Range, Ohms	1K to 100K
Standard Resistance Tolerance	±2%
Operating Temperature Range	-40°C to +125°C
Temperature Coefficient of Resistance	±100ppm/°C
Operating Voltage, Maximum	50Vdc or \sqrt{pr}
Insulation Resistance	100 Megohms
Power Rating, Watts at 70°C	25mW per Resistor / 400mW per Package
Ladder Network Accuracy	8 Bits: ±1/2LSB

Specifications subject to change without notice.


ENVIRONMENTAL

Moisture Resistance	1,000 hours at +40°C, 95% R.H. (3.0% ΔR)
High Temperature Operation	1,000 hours at 70°C (3.0% ΔR)
Short Time Overload	2.5 x rated voltage, 5 seconds (2.0% ΔR)
Temperature Cycling	-55°C to +125°C, 5 cycles (1.0% ΔR)
Resistance to Solder Heat	260°C for 10 seconds (1.0% ΔR)
Load Life	1,000 hours at 70°C (3.0% ΔR)

SCHEMATIC (Inch/mm)

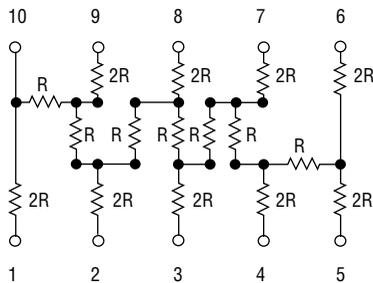


SOLDER PAD LAYOUT (Inch/mm)

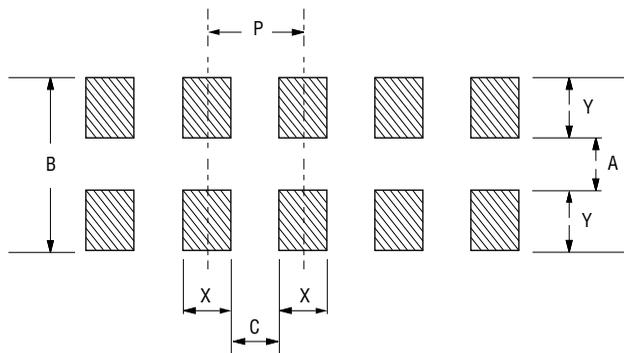


P	Wave Solder Process					Re-Flow Solder Process				
	A	B	C	X	Y	A	B	C	X	Y
.050 1.27	.084 2.10	.148 3.70	.014 0.35	.036 0.90	.032 0.80	.084 2.10	.148 3.70	.014 0.35	.036 0.90	.032 0.80

OUTLINE DIMENSIONS (Inch/mm)

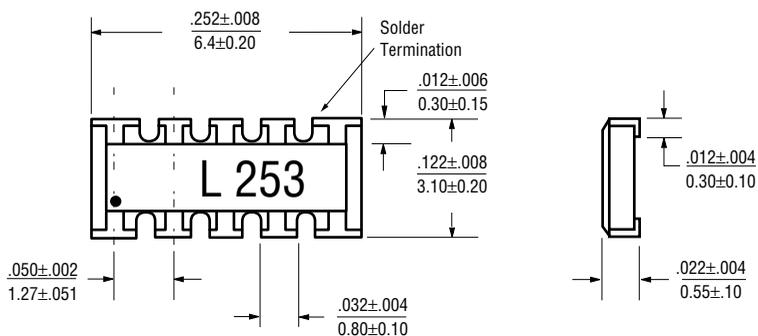

POWER DERATING CURVE

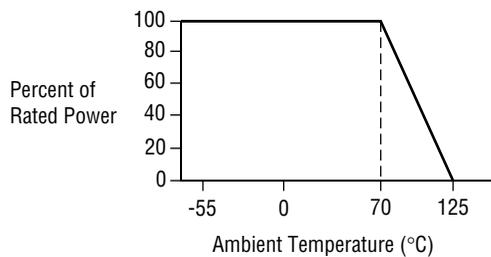

STANDARD RESISTANCE VALUES, OHMS

Value (R1/R2)	1K/2K	10K/20K	25K/50K	50K/100K	100K/200K
Code	102	103	253	503	104

ORDERING INFORMATION

