





4


3

2

1

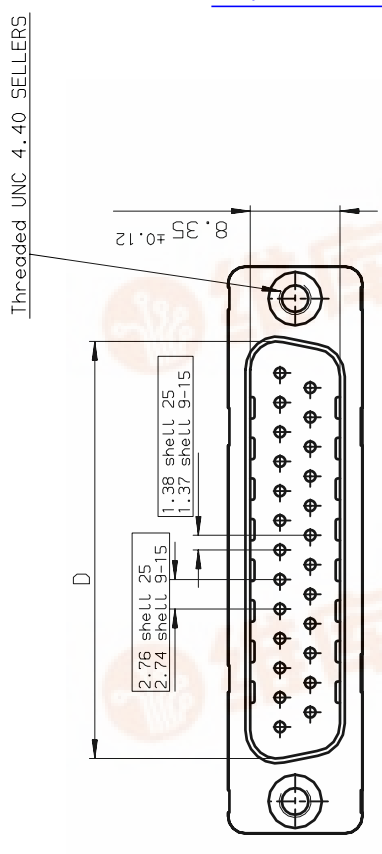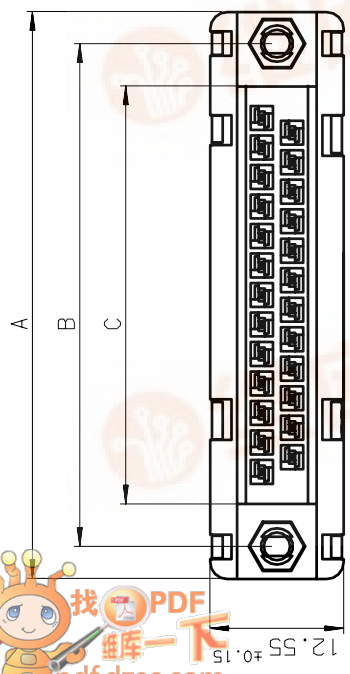

查询D09P24A4GV00供应商

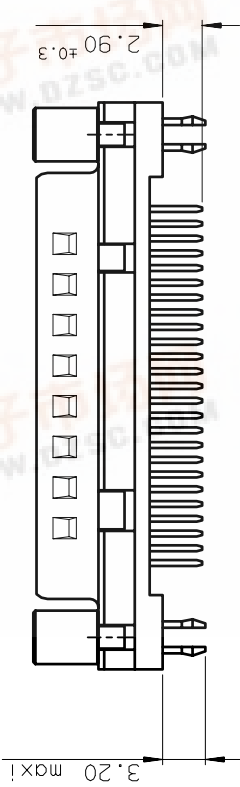


SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	G±0.25
09	30.81	24.99	16.96	16.79	10.96	5.90
15	39.14	33.32	25.18	25.12	19.18	5.90
25	53.03	47.04	39.12	38.84	33.12	5.70

捷多邦, 专业PCB打样工厂, 24小时加急出货

Core range			DESIGNATIONS		
SHELL	TIN LEAD P/N	LEAD FREE P/N	HEADER 9 CTS STRAIGHT	-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK UNC 4.40-ELEC.CONTIN.-PERFORM. LEVEL PL3	
09	D09P24A4GV00	D09P24A4GV00LF	HEADER 15 CTS STRAIGHT	-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK UNC 4.40-ELEC.CONTIN.-PERFORM. LEVEL PL3	
15	D15P24A4GV00	D15P24A4GV00LF	HEADER 25 CTS STRAIGHT	-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK UNC 4.40-ELEC.CONTIN.-PERFORM. LEVEL PL3	
25	D25P24A4GV00	D25P24A4GV00LF			

PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

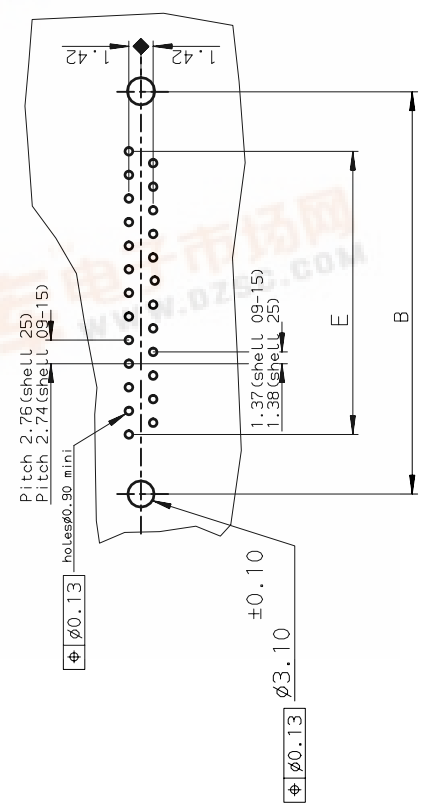

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

www.fciconnect.com		ISO 1302	tolerance	ISO 406	projection	mm
FCI		ISO 1302	ISO 1101	ISO 1101	mm	
Dr JARRY	11/08/95	Product family	D-SUB	size	A3	Scale 2
Eng PESSON	11/08/95	Spec ref	-	ECN	LS05-00056	
Chr LEGARE	11/08/95	Material	SEE NOTES			
Appr LEGARE	11/08/95					
HDR DELTA D STD EUROPE		C01-8646-100-1		Rev. E		
straight, solder type for PCB 1.6mm		CUSTOMER COPY		sheet 1 of 1		
catalog no		- CUSTOMER COPY		Printed: Sep 21, 2005		

3PDM: Rev:E STATUS:Released Printed: Sep 21, 2005