

查询EA50供应商

捷多邦, 专业

PCB打样工厂

EA 50

, 24小时加急出货

DIODE

Heating : indirect by A.C. or D.C.
parallel supply

Chauffage : indirect par C.A. ou C.C.
alimentation- parallèle

Heizung : indirekt durch Wechsel-
oder Gleichstrom; Parallel-
speisung


$V_f = 6,3 \text{ V}$

$I_f = 0,15 \text{ A}$

Dimensions in mm

Dimensions en mm

Abmessungen in mm



Capacitance

Capacités

Kapazitäten

$C_{dk} = 2,1 \text{ pF}$

Limiting values

Caractéristiques limites

Grenzdaten

$V_d \text{ inv}_p = \text{max. } 560^\circ \text{ V}$

$I_d = \text{max. } 5 \text{ mA}$

$I_{dp} = \text{max. } 30 \text{ mA}$


$V_{kf} = \text{max. } 100 \text{ V}$

$R_{kf} = \text{max. } 20 \text{ k}\Omega$



EA 50

PHILIPS

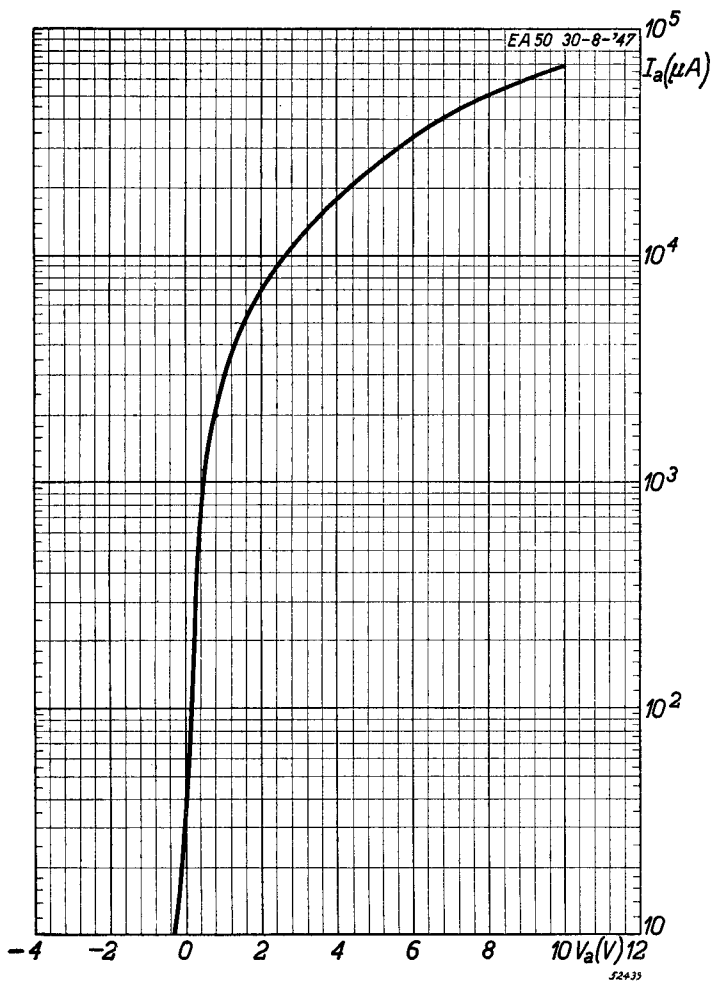



	EA50	
page	sheet	date
1	1	1953.11.11
2	A	1953.11.11
3	FP	1999.04.10