



# EVERLIGHT ELECTRONICS CO.,LTD.

## Technical Data Sheet 2.3" 8\*8 Dot Matrix Displays

### ELM-2881SYGWA/S530-E2

#### ■ Features :

- Large emitting dot 0.2" diameter.
- Low power/high brightness.
- Pb free
- The product itself will remain within RoHS compliant version

#### ■ Descriptions :

- The ELM-2881 series is a large emitting area(5.0mm diameter)LED sources configured in a 64 dots 8\*8 matrix array.
- These devices are made with white dots and gray surface.



#### ■ Applications :

- Audio equipment
- Instrument panels
- Digital read out display

| PART NO.              | Chip     |                    |
|-----------------------|----------|--------------------|
|                       | Material | Emitted Color      |
| ELM-2881SYGWA/S530-E2 | AlGaInP  | Super Yellow Green |

BG0507180

50010283





# EVERLIGHT ELECTRONICS CO.,LTD.

## Technical Data Sheet


### 2.3" 8\*8 Dot Matrix Displays

#### ELM-2881SYGWA/S530-E2

#### Package Dimensions

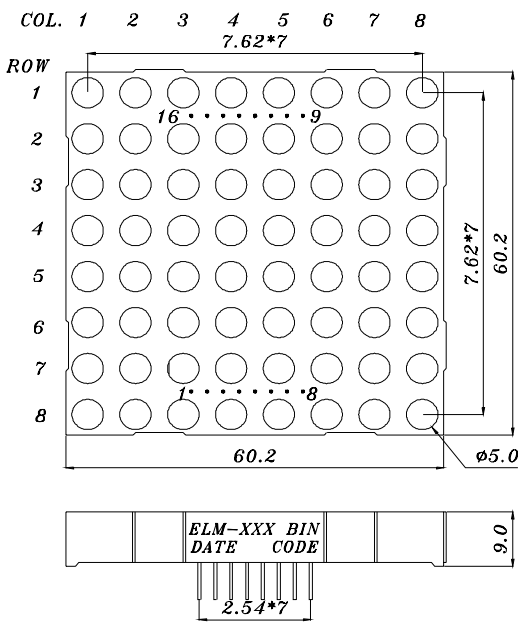

| CATHODE COLUMN |                  |
|----------------|------------------|
| ANODE ROW      |                  |
| 1              | ANODE ROW 5      |
| 2              | ANODE ROW 7      |
| 3              | CATHODE COLUMN 2 |
| 4              | CATHODE COLUMN 3 |
| 5              | ANODE ROW 8      |
| 6              | CATHODE COLUMN 5 |
| 7              | ANODE ROW 6      |
| 8              | ANODE ROW 3      |
| 9              | ANODE ROW 1      |
| 10             | CATHODE COLUMN 4 |
| 11             | CATHODE COLUMN 6 |
| 12             | ANODE ROW 4      |
| 13             | CATHODE COLUMN 1 |
| 14             | ANODE ROW 2      |
| 15             | CATHODE COLUMN 7 |
| 16             | CATHODE COLUMN 8 |

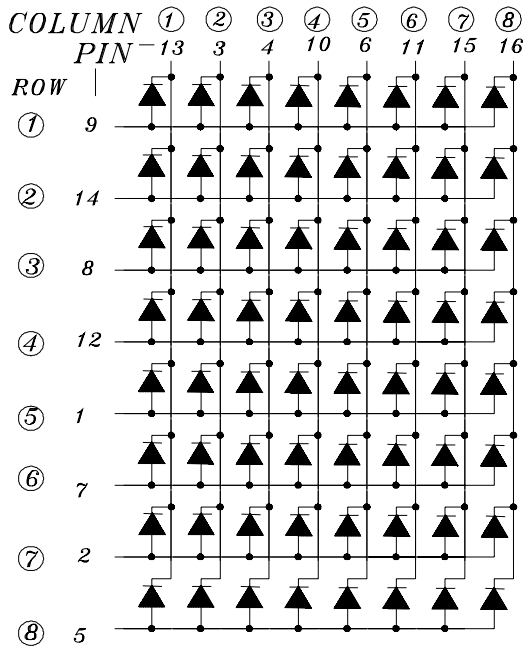

- Notes:**
- 1.All dimensions are in millimeters , tolerance is 0.25mm unless otherwise noted.
  - 2.Above specification may be changed without notice.
- Supplier will reserve authority on material change for above specification.



# EVERLIGHT ELECTRONICS CO.,LTD.

## Technical Data Sheet 2.3" 8\*8 Dot Matrix Displays

### ELM-2881SYGWA/S530-E2

■ Absolute maximum ratings at Ta = 25°C :

| Parameter               | Symbol | Rating      | Unit |
|-------------------------|--------|-------------|------|
| Reverse Voltage         | VR     | 5           | V    |
| Forward Current         | IF     | 25          | mA   |
| Operating Temperature   | Topr   | -40 to +85  | °C   |
| Storage Temperature     | Tstg   | -40 to +100 | °C   |
| Soldering Temperature * | Tsol   | 260 ± 5     | °C   |
| Electrostatic Discharge | ESD    | 2000        | V    |
| Power Dissipation       | Pd     | 60          | mW   |

Note: \*Soldering time ≤ 5 seconds.

■ Electronic optical characteristics :

| Parameter                    |             | Symbol              | Min.  | Typ. | Max. | Unit    | Condition |
|------------------------------|-------------|---------------------|-------|------|------|---------|-----------|
| Luminous Intensity           | Per segment | Iv                  | ----  | 3.2  | ---- | mcd     | IF=2mA    |
|                              |             |                     | 7.8   | 17.6 | ---- | mcd     | IF=10mA   |
| Peak Wavelength              |             | $\lambda$ p         | ----  | 575  | ---- | nm      | IF=20mA   |
| Dominant Wavelength          |             | $\lambda$ d         | ----  | 573  | ---- | nm      | IF=20mA   |
| Spectrum Radiation Bandwidth |             | $\triangle \lambda$ | ----  | 20   | ---- | nm      | IF=20mA   |
| Forward Voltage              |             | VF                  | ----- | 2.0  | 2.4  | V       | IF=20mA   |
| Reverse Current              |             | IR                  | ----  | ---- | 100  | $\mu$ A | VR=5V     |






# EVERLIGHT ELECTRONICS CO.,LTD.

## Technical Data Sheet 2.3" 8\*8 Dot Matrix Displays

ELM-2881SYGWA/S530-E2

### ■ Typical Electro-Optical Characteristic Curves:

CHIP Material:AlGaInP  
Emitted Color:Super Yellow Green

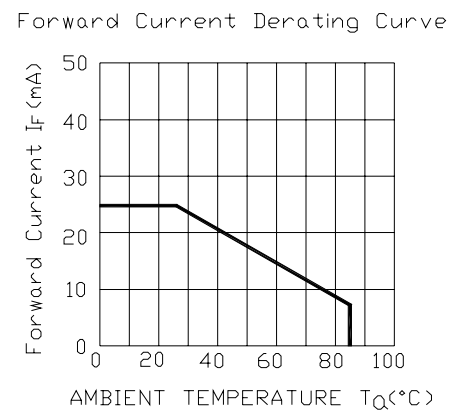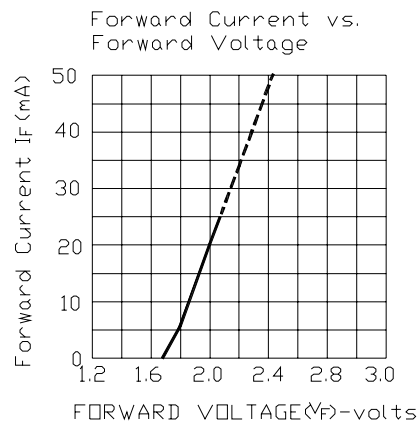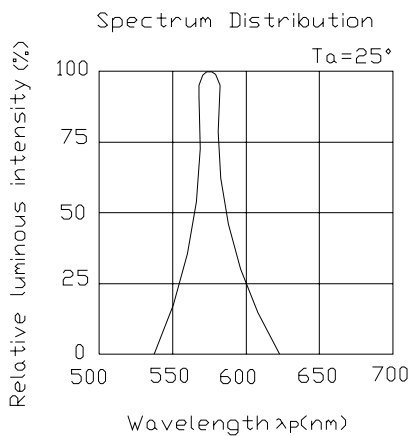



# EVERLIGHT ELECTRONICS CO.,LTD.

## Technical Data Sheet 2.3" 8\*8 Dot Matrix Displays

ELM-2881SYGWA/S530-E2

### Reliability test items and conditions:

The reliability of products shall be satisfied with items listed below.

Confidence level : 97%

LTPD : 3%

| NO | Item                             | Test Conditions                               | Test Hours/Cycle | Sample Size | Failure Judgment Criteria                                           | Ac/Re |
|----|----------------------------------|-----------------------------------------------|------------------|-------------|---------------------------------------------------------------------|-------|
| 1  | Solder Heat                      | TEMP : 260°C ± 5 °C                           | 5 SEC            | 76 PCS      | $I_v \leq I_{vt} * 0.5$<br>or<br>$V_f \geq U$<br>or<br>$V_f \leq L$ | 0/1   |
| 2  | Temperature Cycle                | H : +85°C 30min<br>§ 5 min<br>L : -55°C 30min | 50 CYCLE         | 76 PCS      |                                                                     | 0/1   |
| 3  | Thermal Shock                    | H : +100°C 5min<br>§ 10 sec<br>L : -10°C 5min | 50 CYCLE         | 76 PCS      |                                                                     | 0/1   |
| 4  | High Temperature Storage         | TEMP : 100°C                                  | 1000 HRS         | 76 PCS      |                                                                     | 0/1   |
| 5  | Low Temperature Storage          | TEMP : -55°C                                  | 1000 HRS         | 76 PCS      |                                                                     | 0/1   |
| 6  | DC Operating Life                | IF = 10 mA                                    | 1000 HRS         | 76 PCS      |                                                                     | 0/1   |
| 7  | High Temperature / High Humidity | 85°C/85% RH                                   | 1000 HRS         | 76 PCS      |                                                                     | 0/1   |

Note :  $I_{vt}$  : The test  $I_v$  value of the chip before the reliability test

$I_v$  : The test value of the chip that has completed the reliability test

U : Upper Specification Limit

L : Lower Specification Limit



# EVERLIGHT ELECTRONICS CO.,LTD.

## Technical Data Sheet

### 2.3" 8\*8 Dot Matrix Displays

ELM-2881SYGWA/S530-E2

#### ■ Packing Quantity Specification

1.8PCS/tube, 14 tubes/box

2.4Boxes/Carton

#### Label Form Specification



CPN: Customer's Production Number

P/N : Production Number

QTY: Packing Quantity

CAT: Ranks

HUE: Dominant Wavelength

REF: Reference

LOT No: Lot Number

MADE IN CHINA: Production Place

#### Notes :

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD.  
Office: 7c Building ,Lian Hua Port Industrial District, Lian Hua Shan  
Bonded Pricessing, Zone Pan Yu, Guang Zhou, China

Tel: (020) 84860913 , 84860914  
Fax: (020) 84860600  
<http://www.everlight.com>