

Timers

Delay on Operate

Types FAA01, FAA08

CARLO GAVAZZI




- Time range 0.05 s to 300 h
- Knob selection of time range
- Knob adjustable time setting
- Knob selection of operating mode (4 functions):
 - A - delay on operate
 - B₂ - symmetrical recycler ON first
 - E - interval
 - J - one shot
- Automatic start
- Repeatability: ±0.3% on full scale
- Output: 5 A DPDT relay
- 48 x 48 mm housing for front panel mounting
- 8 or 11 pin sockets
- LED indication for relay status and power supply ON

Product Description

Delay on operate timer with 4 functions and selectable time ranges from 0.05 seconds to 300 hours. Housing 48 x 48 mm for front panel mounting and on 8-pin or 11-pin socket.

Ordering Key

FAA 01 D M24

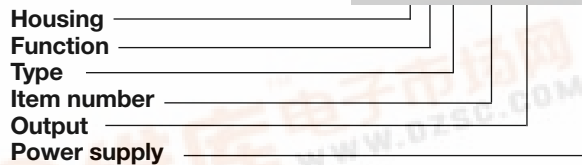

Type Selection

Mounting	Output	Plug
Front or socket	DPDT	11-pin
Front or socket	DPDT	8-pin

Supply: 100 to 240 VAC

FAA01DM24
FAA08DM24

Time Specifications

Time ranges
Selectable by front knob

Time unit	sec	min	hrs	10h
	1.2	0.05 to 1.2	0.5 to 12	
Full scale setting	3	0.125 to 3	1.25 to 3	
	12	0.5 to 12	5 to 120	
	30	1.25 to 30	12.5 to 300	

Repeatability	±0.3% on full scale (±10 ms max in the range of 1.2 s)
Setting accuracy	±5% on full scale ±50 ms
Voltage drift	±0.5% on full scale (±10 ms max in the range of 1.2 s)
Temperature drift	±2% on full scale (±10 ms in the range of 1.2 s)
Reset	
Power supply interruption	>100 ms
Pulse width	>50 ms

Output Specifications

Output	DPDT relay
Output insulation resistance	> 100 MΩ (at 500 VDC)
Contact Ratings (AgCdO ₁₂) Resistive loads AC 1	μ 5 A @ 250 VAC / 30 VDC
Mechanical life	≥ 1 × 10 ⁷ operations
Electrical life	≥ 1 × 10 ⁵ operations (5 A at 250 VAC, cos φ = 1, 1.8 × 10 ³ operations/h)
Operating frequency	< 1800 operations/h

Supply Specifications

Power Supply	Rated operational voltage through terminals:	Overvoltage cat II (IEC 60947-1)
(FAA01DM24)	2, 10	100 to 240 VAC +10%-15% 50 / 60 Hz
(FAA08DM24)	2, 7	100 to 240 VAC +10%-15% 50 / 60 Hz
Power consumption	Rated operational power	10VA @ 240 VAC, (50 Hz)





General Specifications

Indication for Power supply On	LED, green (flashing when timing)
Output ON	LED, red
Environment Degree of protection	IP 40 (front panel)
Operating temperature	-10 to +55 °C (14 to 131 °F)
Ambient humidity	35 to 85% RH
Housing dimensions	48 x 48 mm
Weight	Approx. 95 g
CE marking	Yes
EMC Immunity	Electromagnetic Compatibility
Emission	According to EN 61000-6-1 According to EN 61000-6-3

Function and Time Setting

Upper right knob:

Setting of function
A - delay on operate
B2 - simmetrical recycler
E - interval
J - one shot

Lower left knob:

Time range selector
1.2, 3, 12 and 30

Centre knob:

Time setting on relative scale

Lower right knob:

Time unit selector
sec (seconds)
min (minuts)
hrs (hours)
10h (10 hours)

Mode of Operation

Function A

Delay on operate

The set delay period begins as soon as the power supply is connected. At the end of the set delay the relay operates and doesn't release until the power supply is interrupted for at least 100 ms.

Function B₂

Symmetrical recycler (ON first)

The relay operates and the time period start as soon as the power is applied. At the end of the first set time period, the relay releases. At the end of the second time period (equal to the first), the relay operates again. This sequence continues with equal ON- and OFF- time periods until the power supply is interrupted for at least 100 ms.

Function E

Interval


The relay operates and the time period begins as soon as the power is applied. The relay releases at the end of the time period or when the power supply is disconnected for at least 100 ms.

Function J



One shot

The time period begins as soon as the power supply is connected and at the end of this period the relay operates for 1s.





Range and operation mode selection

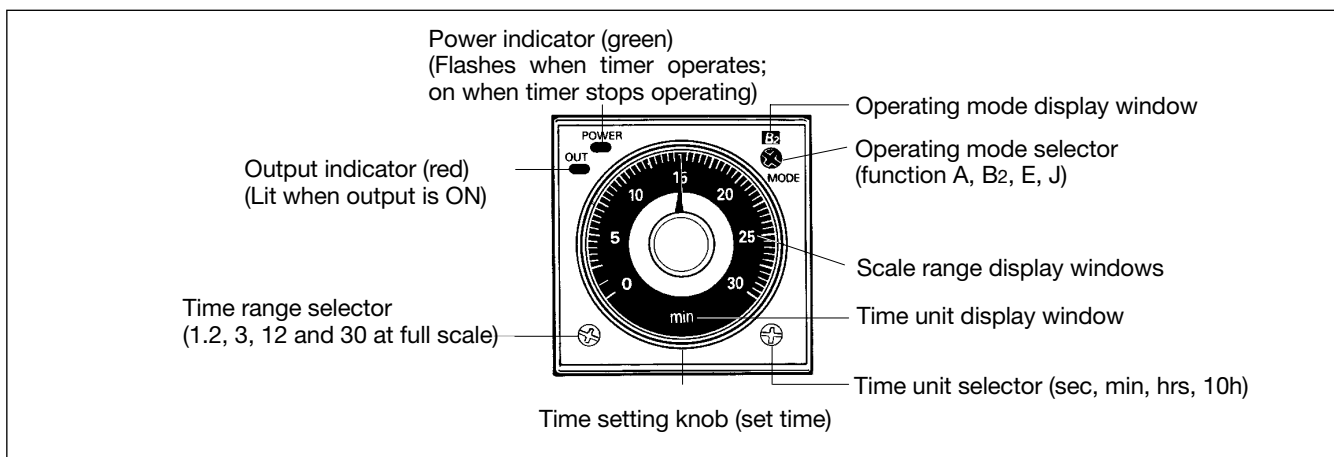

Wiring Diagrams

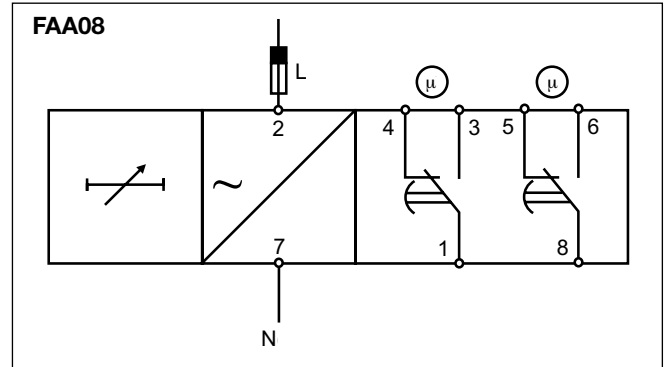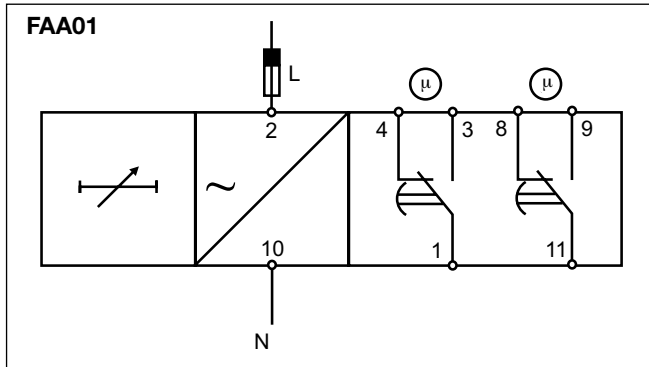

Operating Diagrams

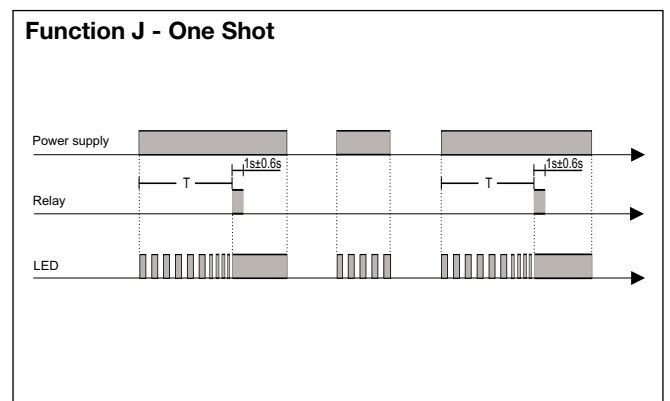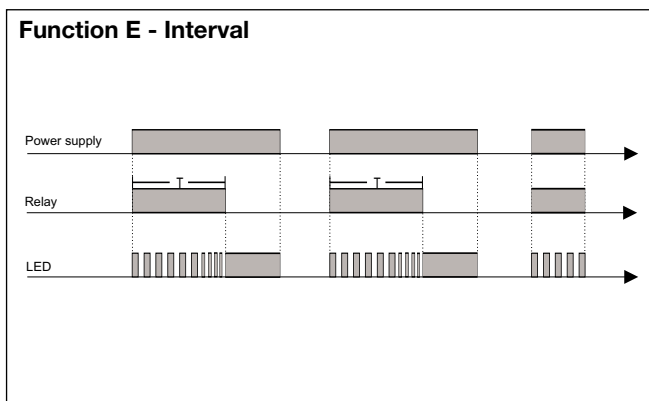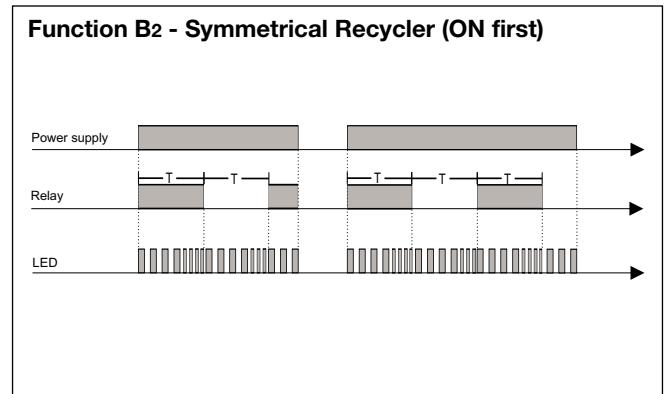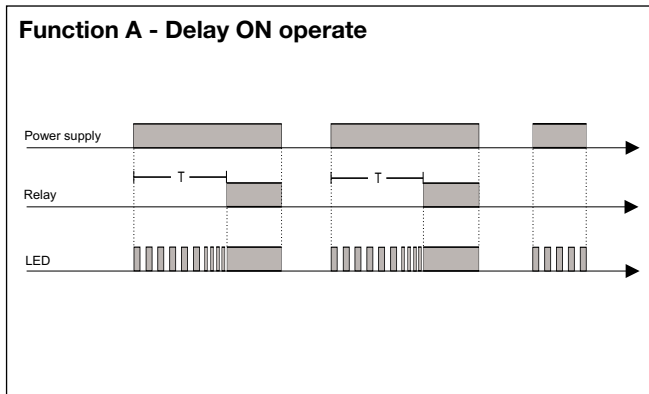

Dimensions

