


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032
FP101200.DC2

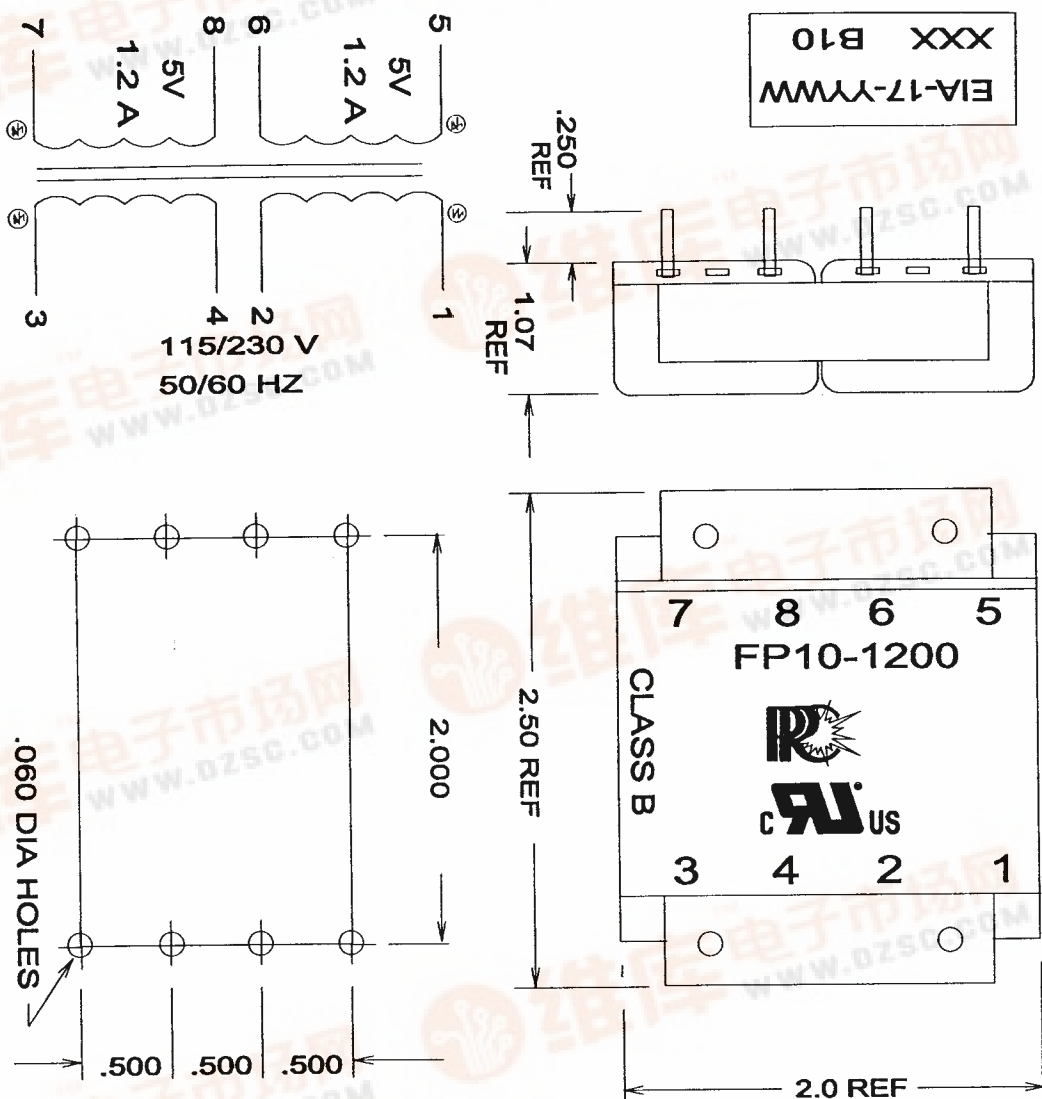

PRODUCTION TESTS

TURN'S RATIO = 100%

DC 1-2 = 114 TO 140

RESISTANCE 3-4 = 114 TO 140

IN OHMS 5-6 = .28 TO .38

NOM 7-8 = .28 TO .38

MAX EXCITATION CURRENT = 22 MA

APPLY = 230V, 60 HZ, 1-4, TIE 2+3

EACH PRI = 114.5 TO 115.5 V

EACH SEC = 5.8 TO 6.1 V

HIPOT = 2000V PRI'S TO SECS

1500V PRI'S, SECS TO CORE

500V P-P, S-S

IMPREGNATION NOTES = PREHEAT 2 HRS
PINS TO BE FREE OF EPOXY

FINAL ASSEMBLY NOTES

METHOD 1 X 1

MARKING PRINTED WRAPPER
DATE CODE ON LABEL AS SHOWN ABOVE.



PART NO.: FP10-1200