


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032
FP10-250.DC2

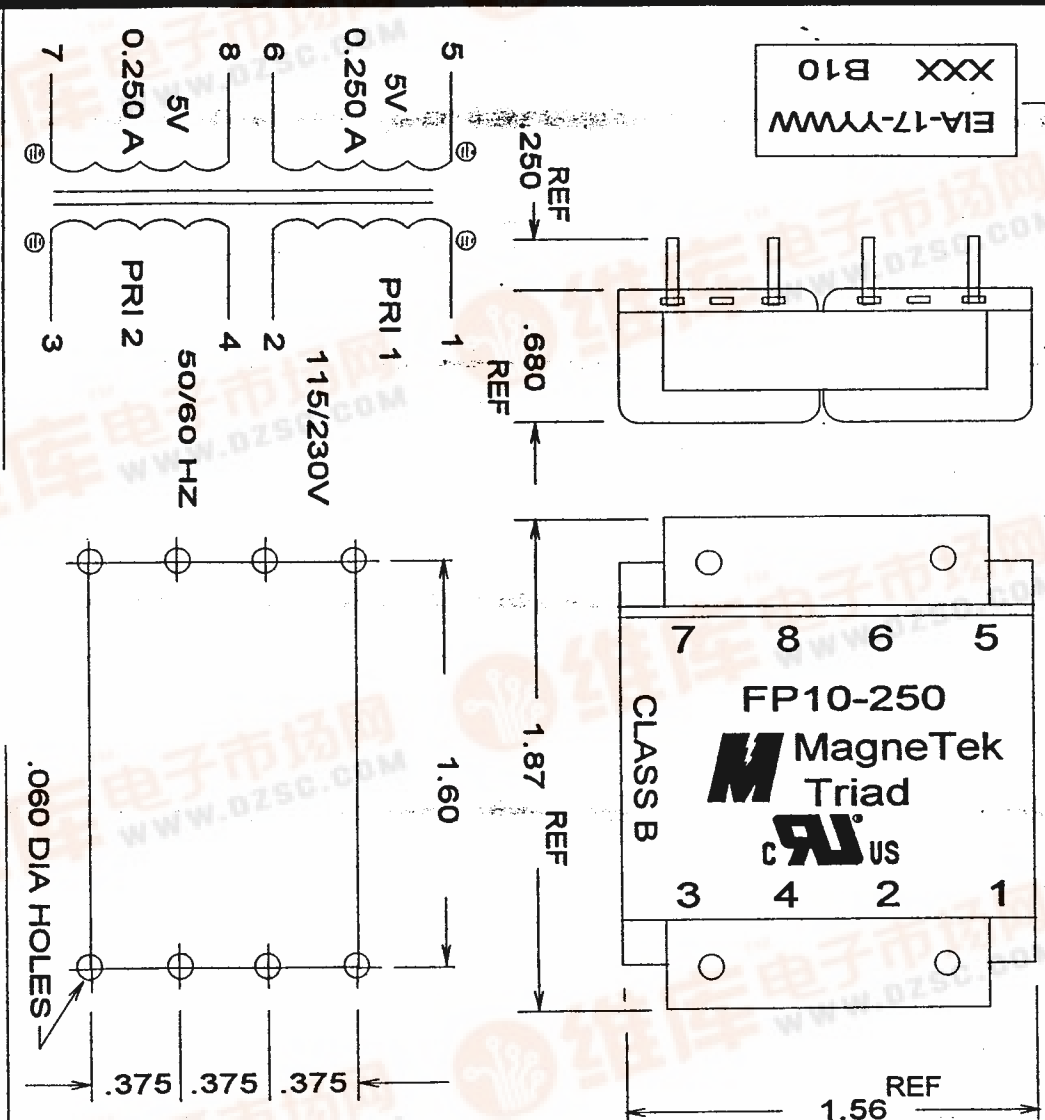

METHOD 1 X 1 MARKING PRINTED WRAPPER DATE & SITE CODE ON DECAL

PRODUCTION TESTS

TURNS RATIO = 100%	
DC	1-2 = 3-4 = 7.65 TO 9.30
RESISTANCE	5-6 = 7-8 = 2.65 TO 3.45
IN OHMS	

MAX EXCITATION CURRENT = .010 A
APPLY = 230V 60HZ, 1-4 (TIE 2+3)
OPEN CIRCUIT VOLTAGE
EACH PRI = 114.5 TO 115.5 V
EACH SEC = 6.5 TO 7.0 V

HIPOT = 2000V PRI'S TO SEC'S
1500V PRI'S, SEC'S TO CORE
500V P-P, S-S

IMPREGNATION NOTES = PREHEAT 2 HRS
PINS TO FREE OF IMPREGNATION

FINAL ASSEMBLY NOTES

MagneTek

PART NO. FP10-250