
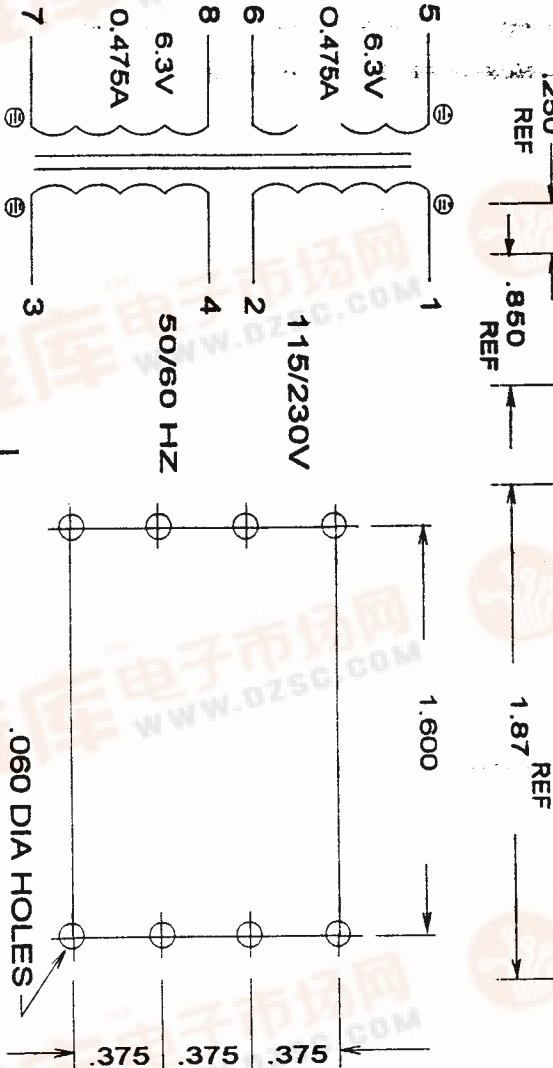
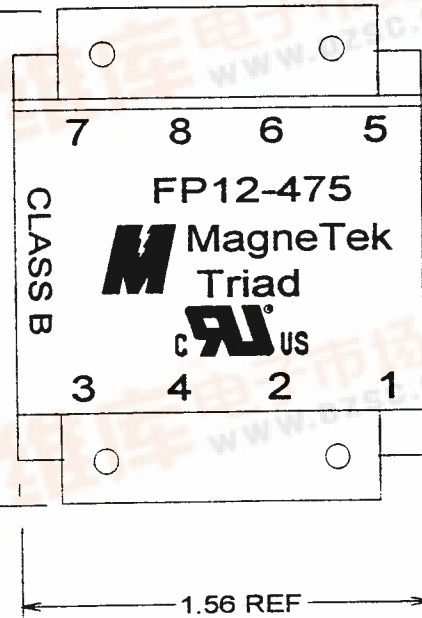


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

FP12-475.DC2

EIA-17-YYWW
XXX B10

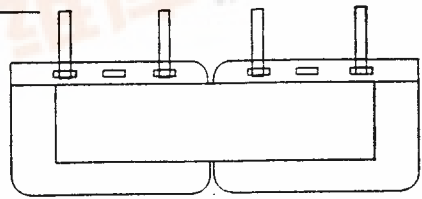

PRODUCTION TESTS

TURN RATIO = 100%

DC	1-2 = 393	NOM
RESISTANCE	3-4 = 393	NOM
IN OHMS	5-6 = 2.4	NOM
	7-8 = 2.4	NOM

MAX EXCITATION CURRENT = 17 MA
APPLY = 230V, 60 HZ, 1-4, TIE 2+3

1-2 = 3-4 = 115V

5-6 = 8.5 TO 8.9V

7-8 = 8.5 TO 8.9V

HIPOT = 2000V, PRI'S TO SEC'S

1500V PRI'S, SEC'S TO CORE

500V, PRI TO PRI

500V, SEC TO SEC

IMPREGNATION NOTES = PREHEAT 2 HRS
PINS TO BE FREE OF EPOXY

FINAL ASSEMBLY NOTES

MagneTek

PART NO. FP12-475