


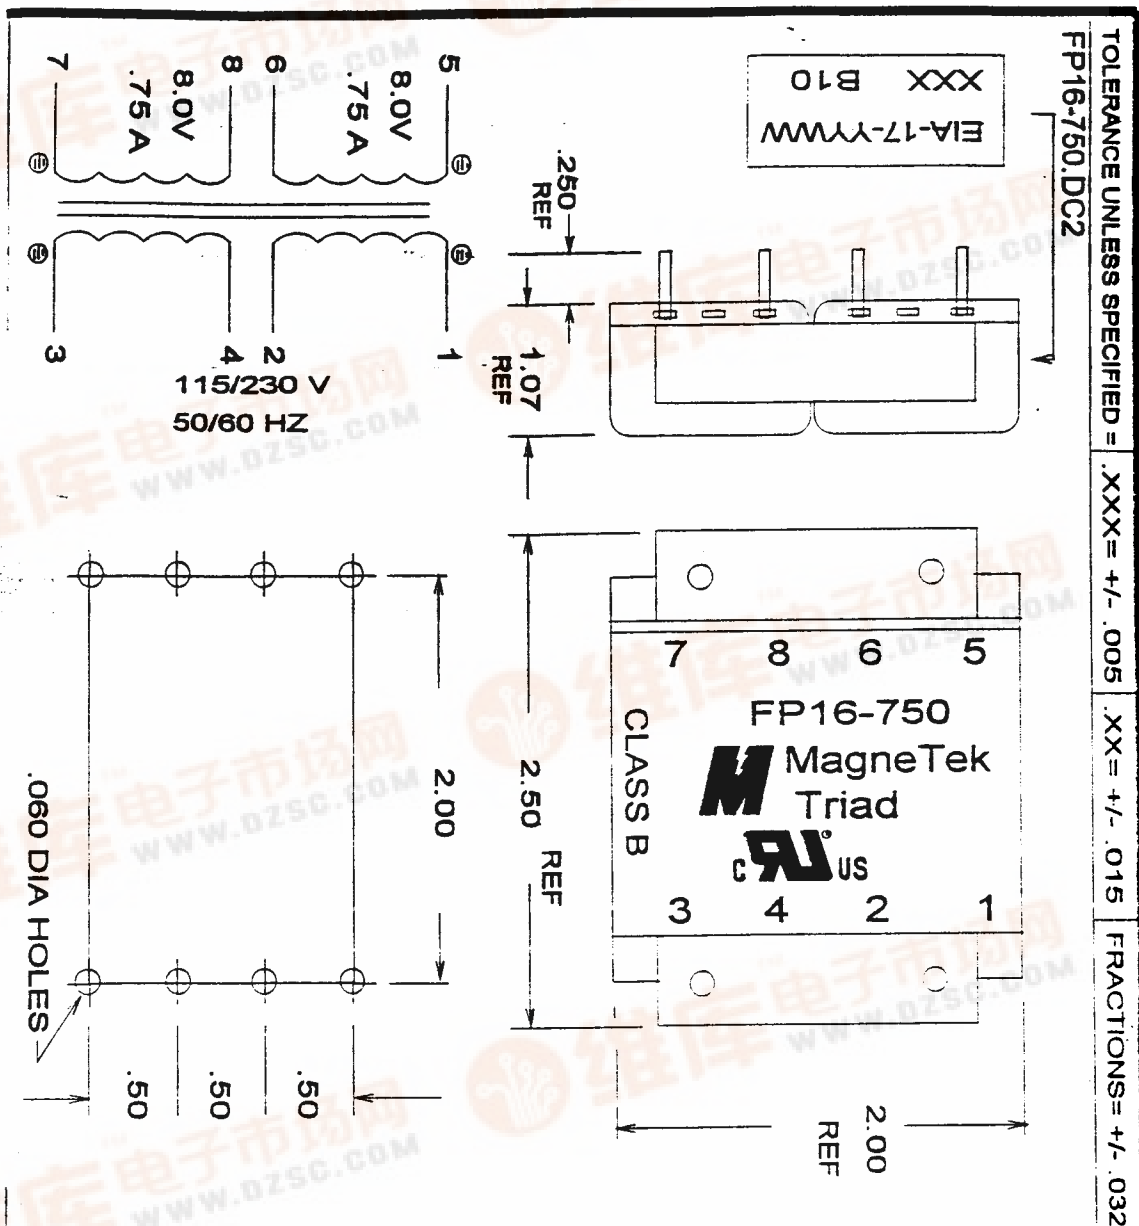

PRODUCTION TESTS

TURN'S RATIO = 100%

DC	1-2 = 114 TO 140
RESISTANCE	3-4 = 114 TO 140
IN OHMS	5-6 = .75 TO .93
NOM	7-8 = .75 TO .93

MAX EXCITATION CURRENT = .022 A

APPLY = 230V, 60 HZ, 1-4, TIE 2+3

1-2 = 3-4 = 115V

EACH SEC. 9.3 TO 9.7 V

HIPOT = 2000V PRI'S TO SEC'S

1500V PRI'S, SEC'S TO CORE

500V P-P, S-S

IMPREGNATION NOTES :: PREHEAT 2 HRS

PINS TO BE FREE OF EPOXY

FINAL ASSEMBLY NOTES

MagneTek

PART NO. FP16-750