


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032
FP20-300.DC2

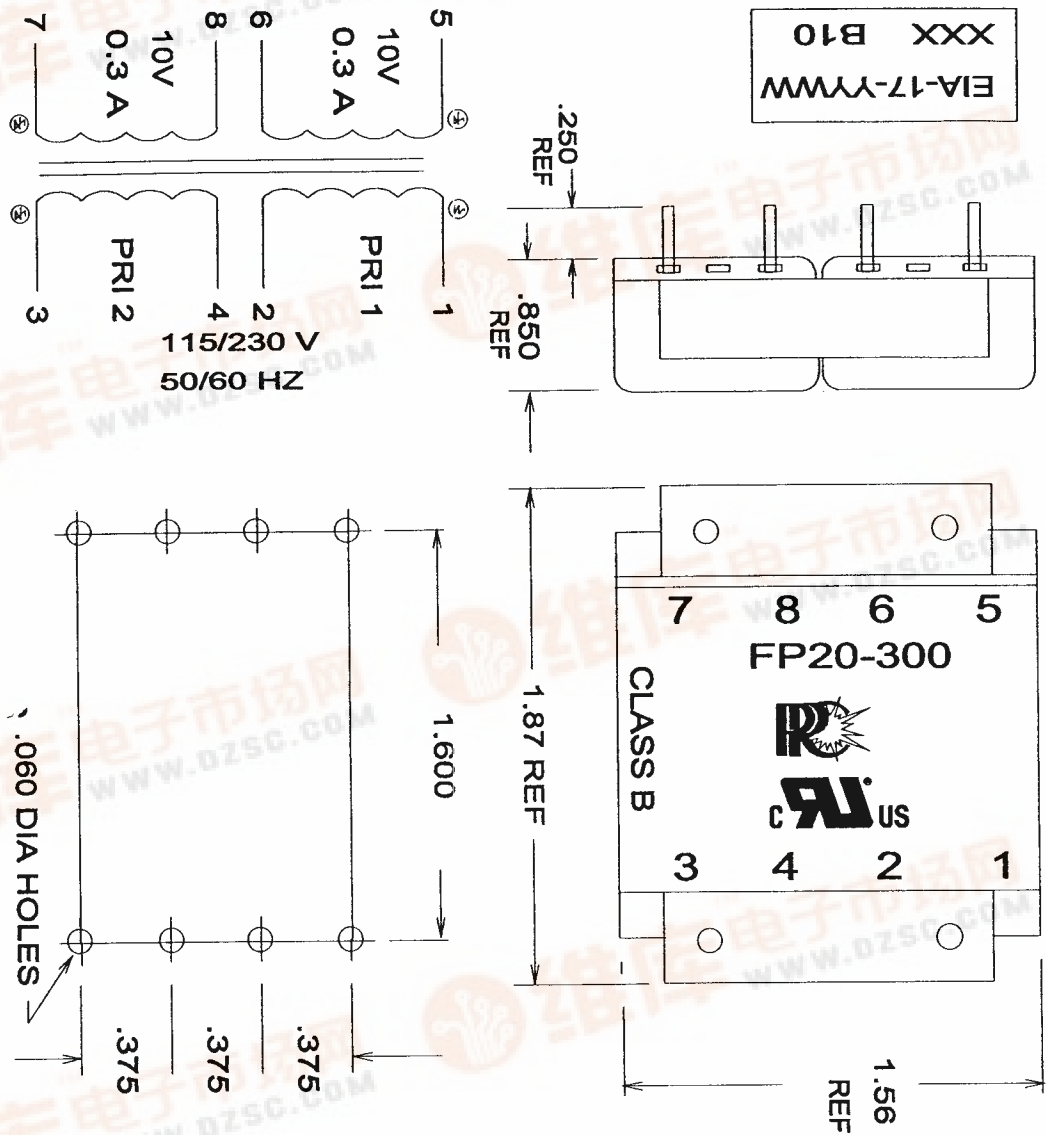

PRODUCTION TESTS

TURNS RATIO = 100%

DC 1-2 = 3-4 = 360 TO 440

RESISTANCE 5-6 = 7-8 = 5.4 TO 6.6

IN OHMS

NOM

MAX EXCITATION CURRENT = .014 A

APPLY = 230V, 60 HZ, 1-4, TIE 2+3

1-2 = 3-4 = 115V

EACH SEC: 13.6 TO 14.2 V

HIPOT = 2000V PRI'S TO SEC'S

1500V PRI'S, SEC'S TO CORE

500V P-P, S-S.

IMPREGNATION NOTES = PREHEAT 2 HRS

PINS TO BE FREE OF EPOXY

FINAL ASSEMBLY NOTES

METHOD 1 X 1

MARKING

PRINTED WRAPPER
DATE CODE ON LABEL AS SHOWN ABOVE.



PART NO.: FP20-300