


FP24-500.DC2

TOLERANCE UNLESS SPECIFIED = .XXXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

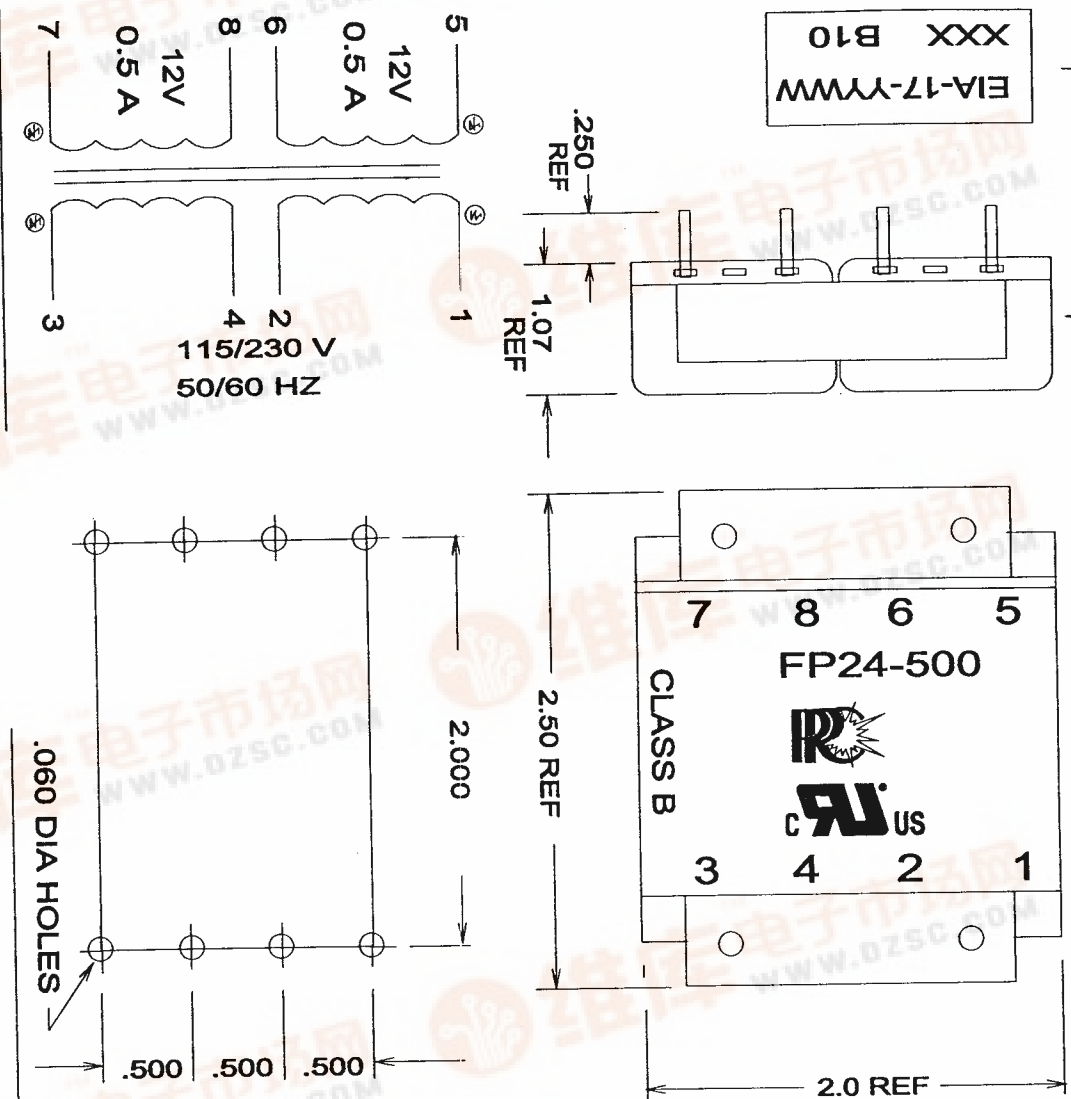

PRODUCTION TESTS

TURN'S RATIO = 100%

DC 1-2 = 114 TO 140

RESISTANCE 3-4 = 114 TO 140

IN OHMS 5-6 = 1.8 TO 2.3

NOM 7-8 = 1.8 TO 2.2

MAX EXCITATION CURRENT = 22 MA

APPLY = 230V, 60 HZ, 1-4, TIE 2+3

1-2 = 3-4 = 114 TO 116 V

EACH SEC = 13.9 TO 14.5 V

HIPOT = 2000V PRI'S TO SEC'S

1500V PRI'S, SEC'S TO CORE

500V P-P, S-S

IMPREGNATION NOTES = PREHEAT 2 HRS

PINS TO BE FREE OF EPOXY

FINAL ASSEMBLY NOTES

METHOD 1 X 1

MARKING PRINTED WRAPPER
DATE CODE ON LABEL AS SHOWN ABOVE.



PART NO.: FP24-500