


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032
FP30-400.DC2

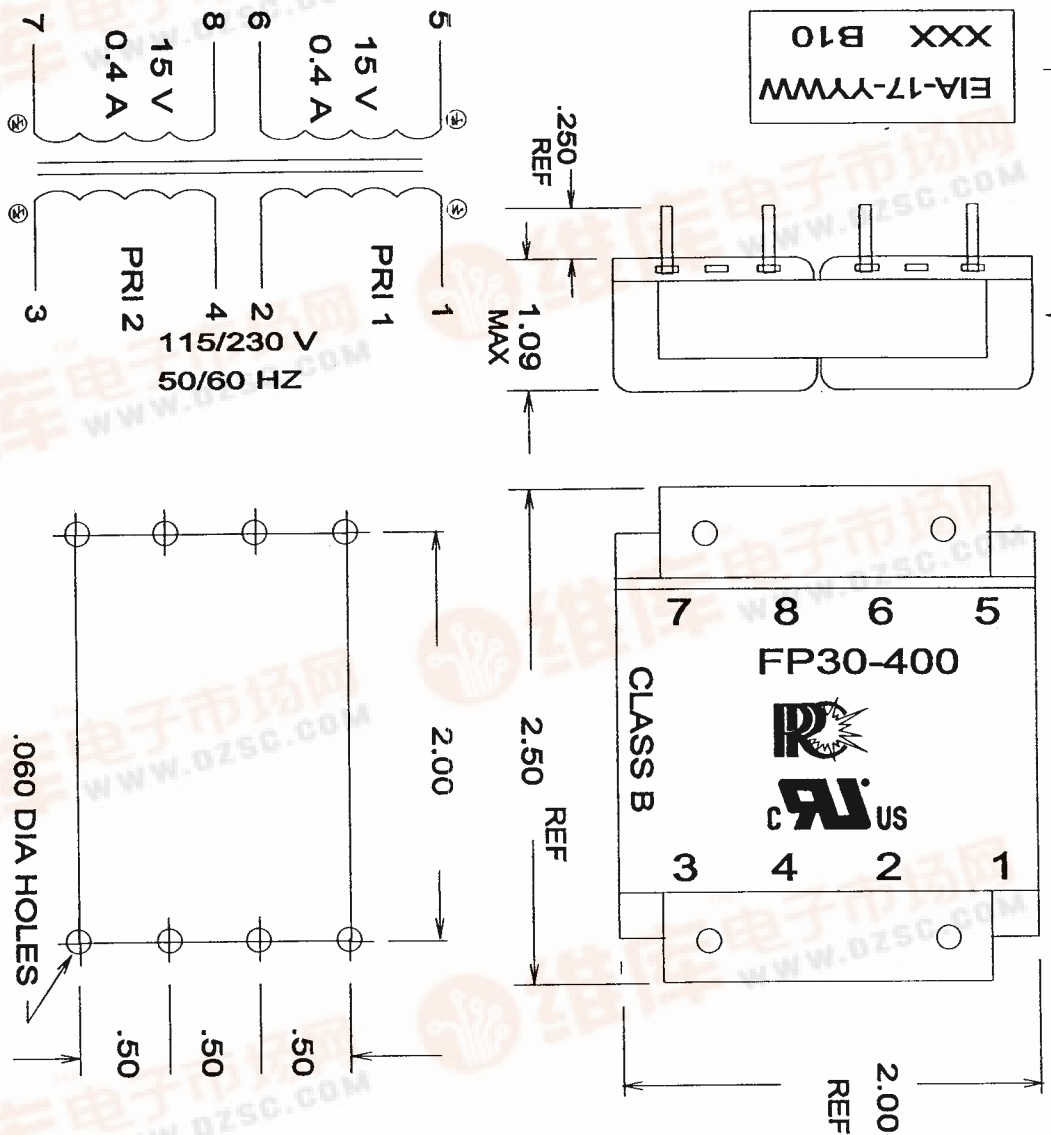

PRODUCTION TESTS

TURNS RATIO = 100%

DC 1-2 = 3-4 = 114 TO 140

RESISTANCE 5-6 = 7-8 = 2.8 TO 3.45

IN OHMS

NOM

MAX EXCITATION CURRENT = .022 A

APPLY = 230V, 60 HZ, 1-4, TIE 2+3

EACH PRI = 114.5 TO 115.5 V

EACH SEC = 17.4 TO 18.1 V

HIPOT: 2000V PRI'S TO SEC'S

1500V PRI'S, SEC'S TO CORE

500V P-P, S-S

IMPREGNATION NOTES = PREHEAT 2 HRS

PINS TO BE FREE OF EPOXY

FINAL ASSEMBLY NOTES

METHOD 1 X 1

MARKING PRINTED WRAPPER

DATE CODE ON LABEL AS SHOWN ABOVE.



PART NO.: FP30-400