


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032
FP34-75.DC2

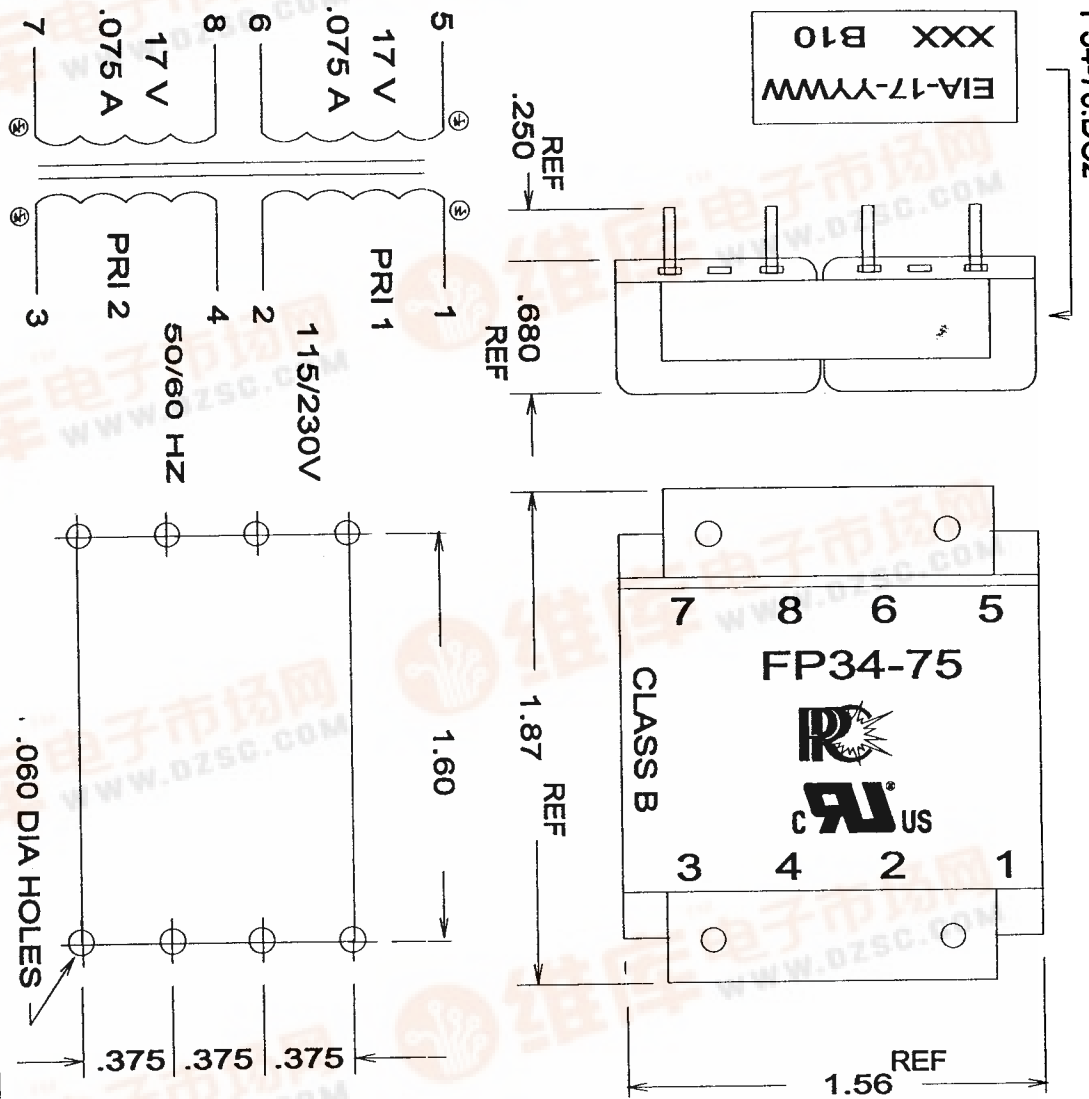

PRODUCTION TESTS

TURN'S RATIO = 100%

DC 1-2 = 3-4 = 765 TO 930

RESISTANCE 5-6 = 7-8 = 36 TO 44

IN OHMS

MAX EXCITATION CURRENT = .012 A

APPLY = 230V 60HZ, 1-4 (TIE 2+3)

OPEN CIRCUIT VOLTAGE

EACH PRI = 114.5 TO 115.5 V

EACH SEC = 23 TO 24 V

HIPOT = 2000V PRI'S TO SEC'S

2000V PRI'S, SEC'S TO CORE

500V P-P, S-S

IMPREGNATION NOTES = PREHEAT 2 HRS

PINS TO FREE OF IMPREGNATION

FINAL ASSEMBLY NOTES

METHOD 1 X 1

MARKING PRINTED WRAPPER
ON DATE & SITE CODE ON DECAL

HP PART NO.: FP34-75