


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032
FP56-200.DC2

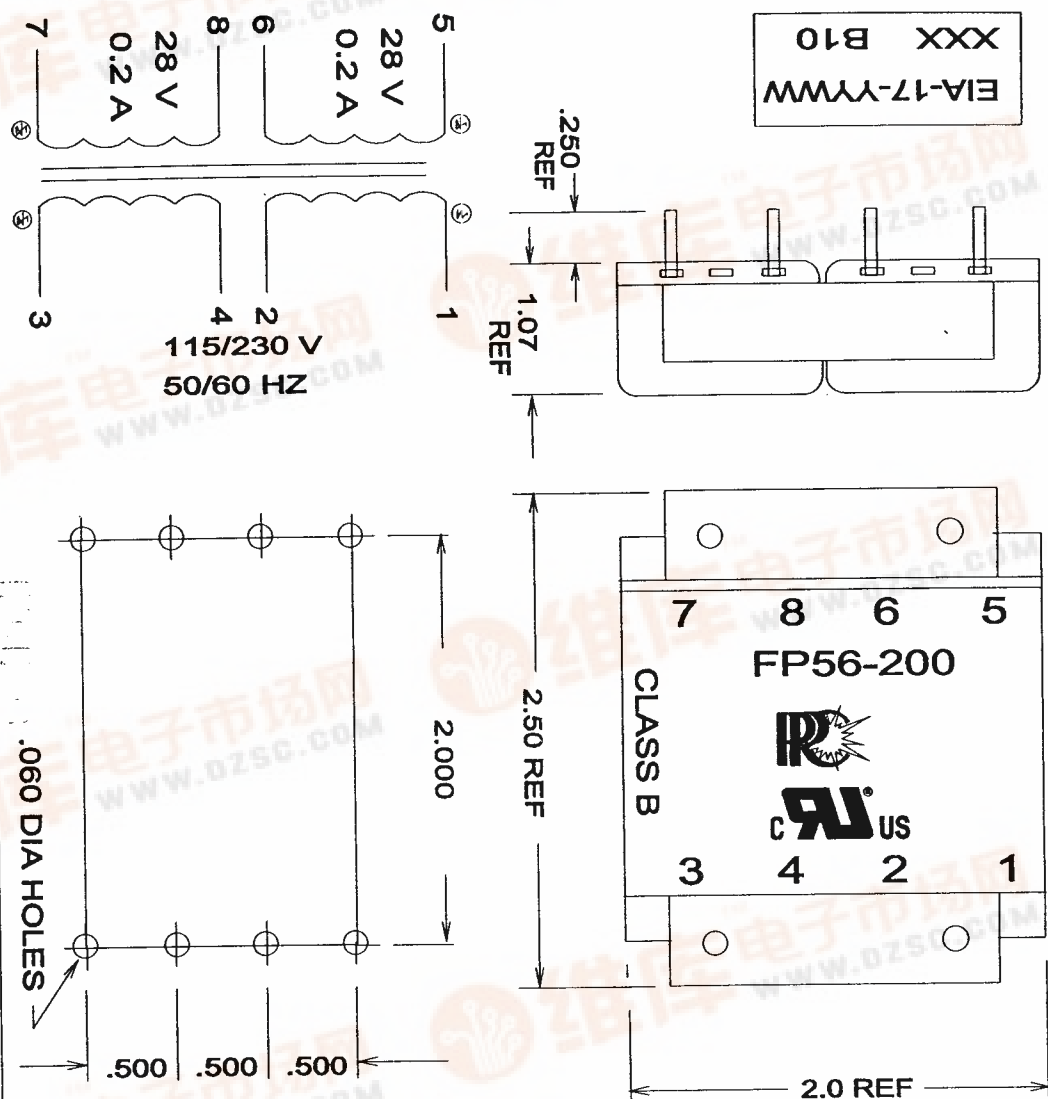

METHOD 1 X 1

MARKING PRINTED WRAPPER
DATE CODE ON LABEL AS SHOWN ABOVE.

PRODUCTION TESTS

TURN RATIO = 100%

DC	1-2 = 114 TO 140
RESISTANCE	3-4 = 114 TO 140
IN OHMS	5-6 = 9.9 TO 12.1
NOM	7-8 = 9.9 TO 12.1

MAX EXCITATION CURRENT = 22 MA

APPLY = 230V, 60 HZ, 1-4, TIE 2+3

EACH PRI = 114.5 TO 115.5 V

EACH SEC = 32.6 TO 33.5 V

HIPOT = 2000V PRI'S TO SEC'S

1500V PRI'S, SEC'S TO CORE

500V P-P, S-S

IMPREGNATION NOTES = PREHEAT 2 HRS

PINS TO BE FREE OF EPOXY

FINAL ASSEMBLY NOTES

PART NO.: FP56-200