
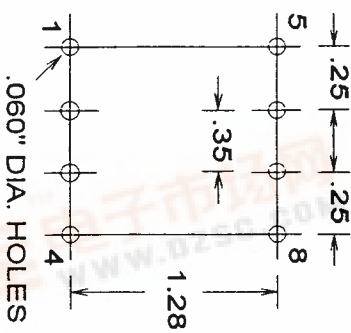
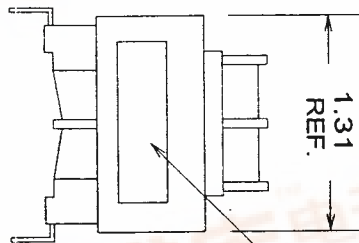


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032
FS10-600.DC2

YYWW = YEAR, WEEK
XXX = SITECODE

M MagneTek - Triad
FS10-600
CLASS B C **PA** us

EIA-17-YYWW
XXX B10

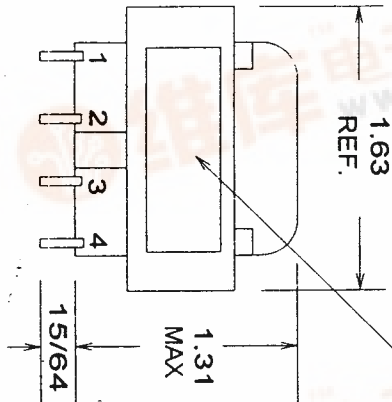

PRODUCTION TESTS

TURN RATIO = 100%

DC	(1-2)	230 TO 283
RESISTANCE	(3-4)	287 TO 350
IN OHMS	(5-6)	.55 TO .82
	(7-8)	.65 TO .98

MAX EXCITATION CURRENT = .015 AMPS

APPLY = 230V, 60Hz PINS 1-4

CONNECT PINS 2-3

OPEN CIRCUIT VOLTAGE TEST:

APPLY 230V/60HZ PINS 1-4, CON. 2-3

READ 5.3 TO 6.2 EACH SECONDARY

HIPOT = 2500V P-S, P-C, S-C

500V S-S, P-P

CONTINUITY = 100% PRIMARY

IMPREGNATION NOTES = 2 HOUR PREHEAT

PINS MUST BE FREE OF IMPREG.

FINAL ASSEMBLY NOTES

M MagneTek

PART NO. FS10-600

METHOD

1 X 1

MARKING

SEE LABEL DETAIL ABOVE

