





TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 .FRACCTIONS = 7/- .004

FS12-090.DC2

YYWW = YEAR, WEEK
XXX = SITECODE

M MagneTek - Triad
FS12-090
CLASS B C **RI** US

EIA-17-YYWW
XXX B10

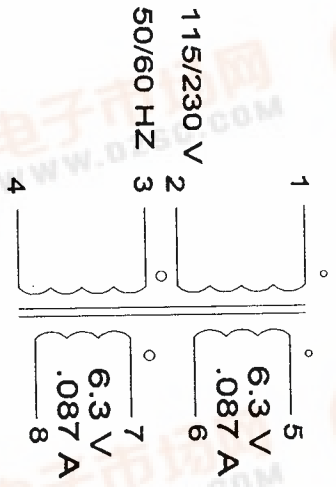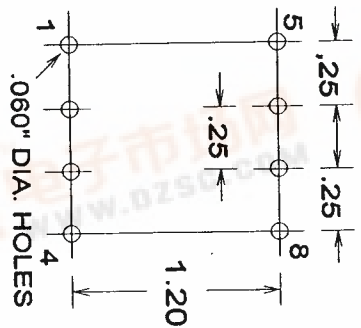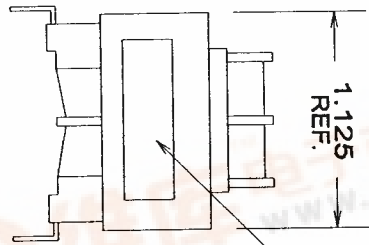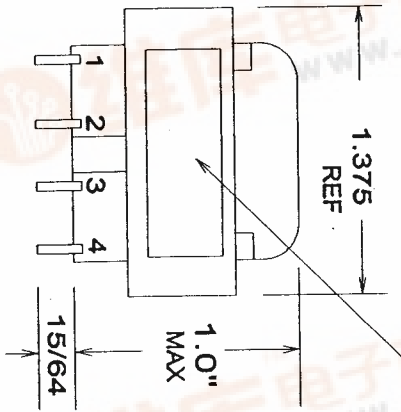

MARKING
SEE LABEL DETAIL ABOVE

PRODUCTION 12010

TURNS RATIO = 100%	
DC	1-2 = 1650 TO 1900
RESISTANCE	3-4 = 2160 TO 2620
IN OHMS	5-6 = 8.2 TO 10.1
	7-8 = 10.8 TO 13.2

MAX EXCITATION CURRENT = 0.005 A
APPLY = 230V 60 HZ, 1-4, TIE 2+3

OPEN CIRCUIT VOLTAGE TEST:
230V 60 HZ, 1-4, TIE 2+3
EACH PRI = 114.5 TO 115.5 V
EACH SEC = 8.0 TO 8.6 V

HIPOT: 2500V PRI'S TO SEC'S
1500V PRI'S, SEC'S TO CORE
500V P-P, S-S
CONTINUITY: 100% PRI

IMPREGNATION NOTES =
FINAL ASSEMBLY NOTES

M MagneTek

PART NO. FS12-090

