




TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

**FS16-150.DC2**


**M** MagnaTek - Triad  
 FS16-150  
 CLASS B C **PA** US

EIA-17-YYWW  
 XXX B10

YYWW = YEAR, WEEK  
 XXX = SITECODE

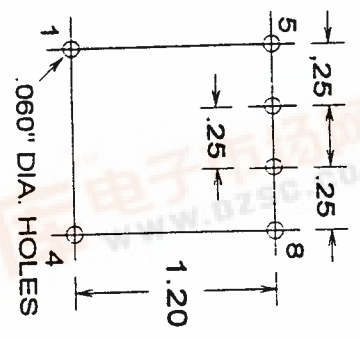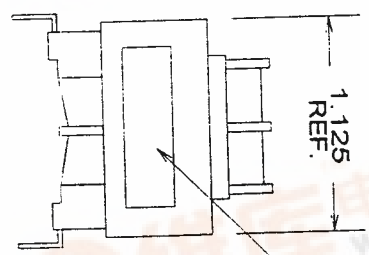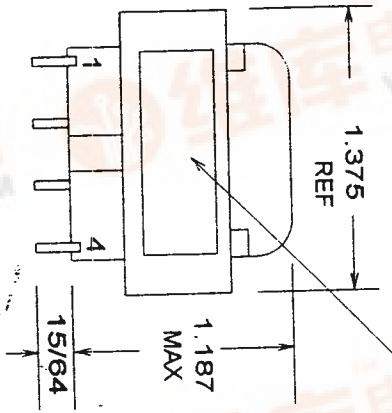

115/230 V  
 50/60 HZ



**PRODUCTION TESTS**

DC	1-2 = 675 TO 815
RESISTANCE	3-4 = 825 TO 970
IN OHMS	5-6 = 4.6 TO 5.6
	7-8 = 5.6 TO 7

MAX EXCITATION CURRENT = 0.010 A  
 APPLY = 230V 60 HZ, 1-4, TIE 2+3

OPEN CIRCUIT VOLTAGE TEST:  
 230V 60 HZ, 1-4, TIE 2+3  
 1-2 = 3-4 = 115V  
 EACH SEC, 9.7 TO 10.2 V  
 HIPOT = 2500V PRI'S TO SEC'S & CORE  
 2500V SEC'S TO CORE  
 500V P-P, S-S

**FINAL ASSEMBLY NOTES**

