





FS16-400.DC2

TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

YYMMW = YEAR, WEEK
XXX = SITECODE

M MagneTek - Triad
FS16-400
CLASS B C **PA** US

EIA-17-YYMMW
XXX B10

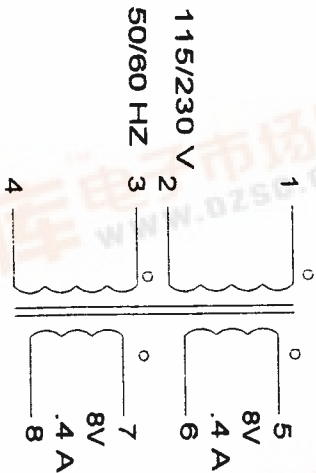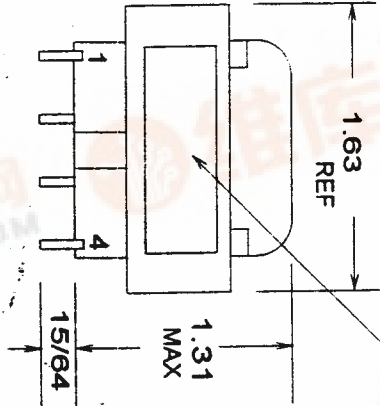

PRODUCTION TESTS

DC	1-2 = 230 TO 283
RESISTANCE	3-4 = 287 TO 350
IN OHMS	5-6 = 1.4 TO 2.0
	7-8 = 1.7 TO 2.5

MAX EXCITATION CURRENT = .015 A
APPLY = 230V 60 HZ, 1-4, TIE 2+3

OPEN CIRCUIT VOLTAGE TEST:

230V 60 HZ, 1-4, TIE 2+3

1-2 = 3-4 = 114.5 TO 115.5 V

5-6 = 7-8 = 9.4 TO 9.9 V

HIPOT: 2500V PRI'S TO SEC'S

1500V PRI'S, SEC'S, TO CORE

500V P-P, S-S.

CONTINUITY = 100% PRIMARY

IMPREGNATION NOTES = 2 HOUR PREHEAT
PINS MUST BE FREE OF IMPREG.

FINAL ASSEMBLY NOTES

M MagneTek

PART NO. FS16-400

METHOD

1 X 1

MARKING

SEE LABEL DETAIL ABOVE