
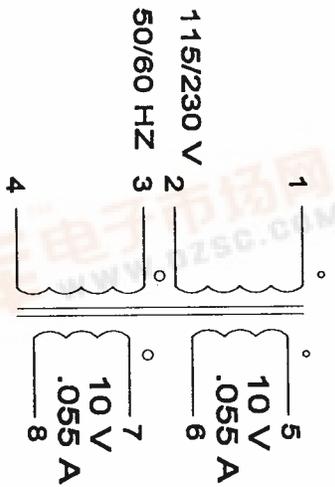
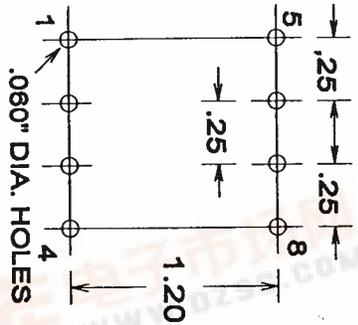


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032
 YYYW = YEAR, WEEK
 XXX = SITECODE

FS20-055.DC2

M MagneTek
 Trad
 FS20-055
 CLASS B C **PT** US

EIA-17-YYWW
 XXX B10

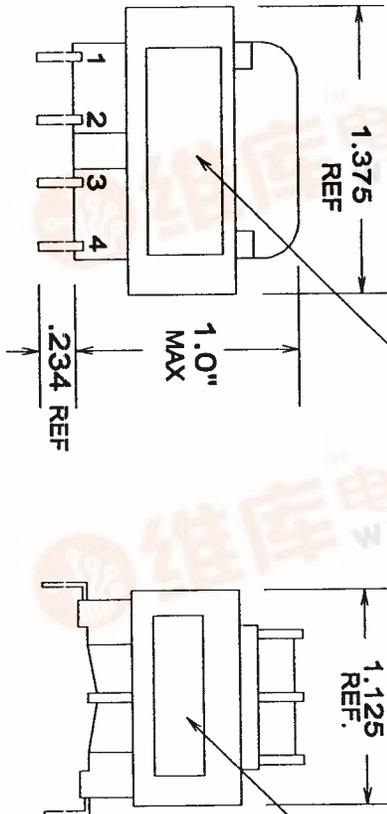

PRODUCTION TESTS

DC	1-2 = 1900 MAX
RESISTANCE	3-4 = 2650 MAX
IN OHMS	5-6 = 23 NOM
	7-8 = 31 NOM

MAX EXCITATION CURRENT = 0.005 A

APPLY = 230V 60 HZ, 1-4, TIE 2+3

OPEN CIRCUIT VOLTAGE TEST:

230V 60 HZ, 1-4, TIE 2+3

1-2 = 114.1 TO 115.1V

3-4 = 114.9 TO 115.9V

EACH SEC = 12.6 TO 13.5 V

HIPOT: 2500V PRI'S TO SEC'S

1500V PRI'S, SEC'S TO CORE

500V P-P, S-S

CONTINUITY: PRI 100%

IMPREGNATION NOTES

FINAL ASSEMBLY NOTES

M MagneTek

PART NO. FS20-055

