
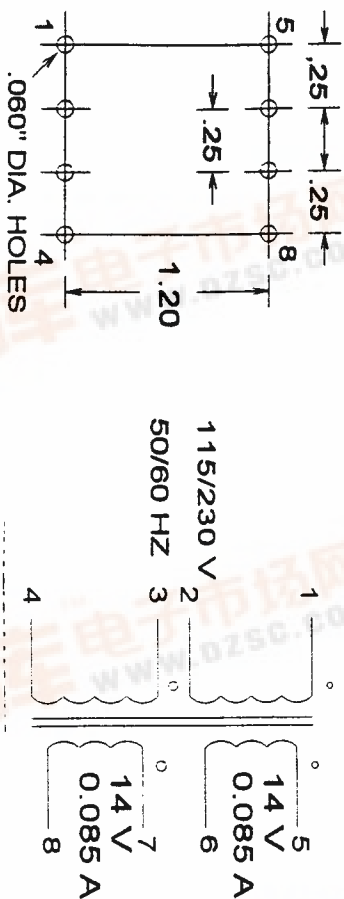


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

YYMM = YEAR, WEEK
XXX = SITE CODE

M MagneTek - Triad
FS28-85
CLASS B C **PA** US

EIA-17-YYMM
XXX B10

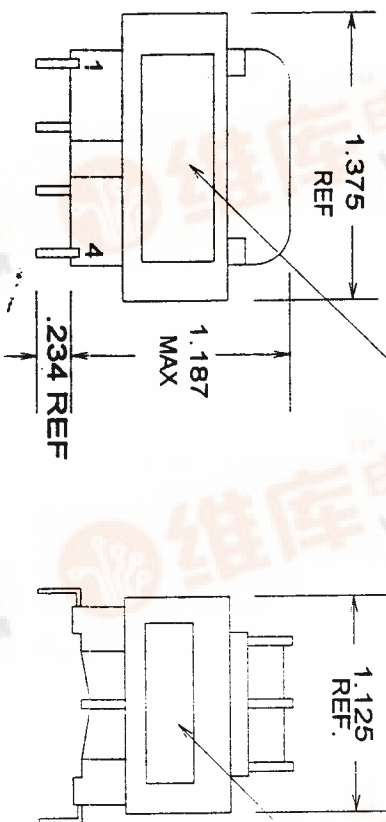

PRODUCTION TESTS

DC	1-2 = 675 TO 815
RESISTANCE	3-4 = 825 TO 970
IN OHMS	5-6 = 16.8 TO 20.6
	7-8 = 20.5 TO 25.1

MAX EXCITATION CURRENT = 0.010 A

APPLY = 230V 60 HZ, 1-4, TIE 2+3

OPEN CIRCUIT VOLTAGE:

EACH PRI = 114.5 TO 115.5 V

EACH SEC = 17.5 TO 18.5 V

HIPOT: 2500V PRI'S TO SEC'S

1500V PRI'S, SEC'S TO CORE

500V P-P, S-S

CONTINUITY: PRIMARY 100%

IMPREGNATION NOTES = 2 HOUR PREHEAT

PINS MUST BE FREE OF IMPREG.

M MagneTek

PART NO. FS28-85

METHOD

1 X 1

MARKING

SEE LABEL DETAIL ABOVE