

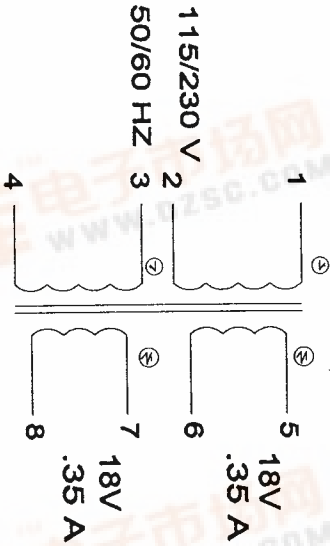


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032
FS36-350.DC2
 YYYW = YEAR, WEEK
 XXX = SITECODE

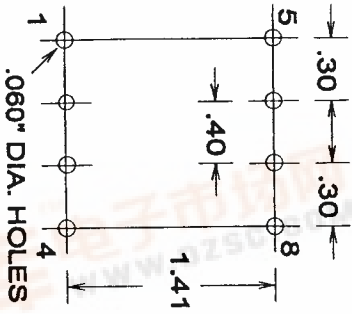

EIA-17-YYWW
 XXX B10

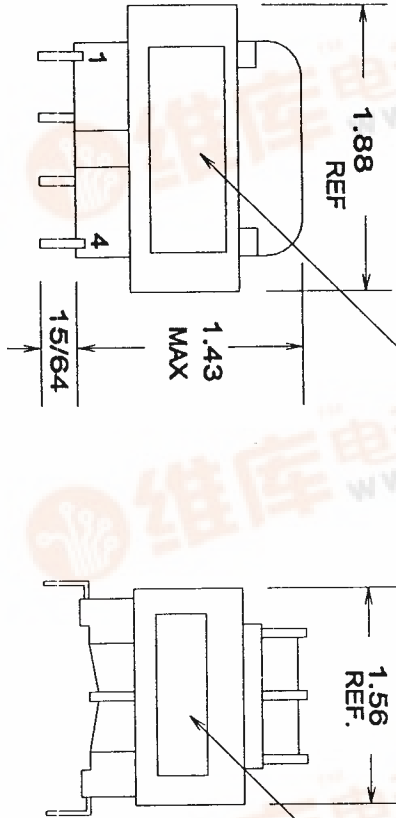

PRODUCTION TESTS

DC	1-2 = 121 TO 149
RESISTANCE IN OHMS	3-4 = 139 TO 170
	5-6 = 4.5 TO 5.5
	7-8 = 5.2 TO 6.4

MAX EXCITATION CURRENT = .020 A

APPLY = 230V 60 HZ, 1-4, TIE 2+3

OPEN CIRCUIT VOLTAGE TEST:

230V 60 HZ, 1-4, TIE 2+3

1-2 = 3-4 = 115V

EACH SEC = 21.6 TO 22.4 V

HIPOT: 2500V PRI'S TO SEC'S

1500V PRI'S, SEC'S TO CORE

500V P-P, S-S

IMPREGNATION NOTES = 2 HOUR PREHEAT
 PINS MUST BE FREE OF IMPREG.

FINAL ASSEMBLY NOTES

METHOD

1 X 1

MARKING

SEE LABEL DETAIL ABOVE



PART NO.: FS36-350

