

SOLID TANTALUM ELECTROLYTIC CAPACITORS

查询P920430MAA供应商

提多邦，专业PCB打样工厂，24小时加急出货 nichicon


F92

Resin-molded Chip,
Compact Series




Upgrade

● Adapted to the RoHS directive (2002/95/EC).

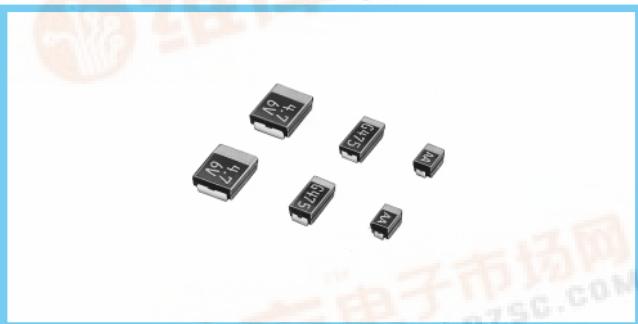

■ Marking

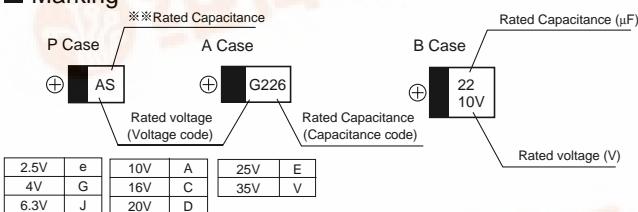

※※ Capacitance code of "P" case products are as shown below.

■ Specifications


Item	Performance Characteristics	
	P Case	A • B Case
Category Temperature Range	-55 ~ +125°C (Rated temperature : 85°C)	
Capacitance Tolerance	± 20% (at 120Hz)	
Dissipation Factor (120Hz)	refer to Next Page	
ESR (100kHz)	refer to Next Page	
Leakage Current	<ul style="list-style-type: none"> After 1 minute's application of rated voltage, leakage current at 20°C is not more than 0.01CV or 0.5μA, whichever is greater. After 1 minute's application of rated voltage, leakage current at 85°C is not more than 0.01CV or 5μA, whichever is greater. After 1 minute's application of derated voltage, leakage current at 125°C is not more than 0.125CV or 6.3μA, whichever is greater. 	
Capacitance Change by Temperature	+20% Max. (at +125°C) +15% Max. (at +85°C) -15% Max. (at -55°C)	+15% Max. (at +125°C) +10% Max. (at +85°C) -10% Max. (at -55°C)
Damp Heat (No voltage applied)	At 40°C 90 ~ 95% R.H. 240 hours Capacitance Change... Refor to next page (* 1) Dissipation Factor... 150% or less of initial specified value Leakage Current... Initial specified value or less	At 40°C 90 ~ 95% R.H. 500 hours Refor to next page (* 1) Initial specified value or less Initial specified value or less
Temperature Cycles	-55°C / +125°C 30 minutes each 5 cycles Capacitance Change... Refor to next page (* 1) Dissipation Factor... 150% or less of initial specified value Leakage Current... Initial specified value or less	Refor to next page (* 1) Initial specified value or less Initial specified value or less

■ Standard ratings


Cap.(μF) \ V	2.5	4	6.3	10	16	20	25	35	※※ Capacitance code
Code	0E	0G	0J	1A	1C	1D	1E	1V	
0.22	224					P		A	J
0.33	334					P		A	N
0.47	474				P	P • A	A	A	S
0.68	684				P	A	B	B	W
1	105		P	P	P • A	P • A	P • A • B	A	A
1.5	155		P	P • A	P • A	A			E
2.2	225	P	P	P • A	P • A	(P) • A • B	A • B	B	J
3.3	335	P	P	P • A	P • A	A	B	(B)	N
4.7	475	P • A	P • A	P • A	P • A	A • B	(A) • B	(A) • B	S
6.8	685	P	P	P • A	P • A	B			w
10	106	P • A	P • A	P • A • B	P • A • B	A • B			a
15	156	P	P • A	P • A	A				e
22	226	P • A	P • A	P • A • B	A • B	B			j
33	336	P • A	P • A	A • B	B				n
47	476	(P) • B	(P) • A • B	A • B	(B)				
68	686	B	A • B						
100	107	B	(A) • B	B					

() The series in parentheses are being developed. Please contact to your local Nichicon sales office when these series are being designed in your application.

■ Type numbering system (Example: 6.3V 10μF)

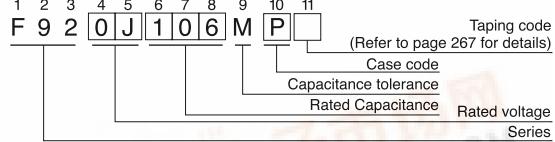

■ Drawing




■ Dimensions

Case code	L	W ₁	W ₂	H	S	(mm)
P	2.0 ± 0.2	1.25 ± 0.1	0.9 ± 0.1	1.1 ± 0.1	0.5 ± 0.2	
A	3.2 ± 0.2	1.6 ± 0.2	1.2 ± 0.1	1.1 ± 0.1	0.8 ± 0.2	
B	3.4 ± 0.2	2.8 ± 0.2	2.3 ± 0.1	1.1 ± 0.1	0.8 ± 0.2	

Resistance to Soldering Heat	10 seconds reflow at 260°C, 5 seconds immersion at 260°C	Refor to next page (* 1)
	Capacitance Change... Refor to next page (* 1)	
Surge*	Dissipation Factor... 150% or less of initial specified value	Initial specified value or less
	Leakage Current... Initial specified value or less	
Endurance*	After application of surge voltage in series with a 33Ω resistor (For "P" case: 1kΩ) at the rate of 30 seconds ON, 30 seconds OFF, for 1000 successive test cycles at 85°C, capacitors meet the characteristics requirements listed below.	After 2000hours' application of rated voltage in series with a 3Ω resistor at 85°C, or derated voltage in series with a 3Ω resistor at 125°C, capacitors meet the characteristic requirements listed below.
	Capacitance Change... Refor to next page (* 1)	
Shear Test	Dissipation Factor... 150% or less of initial specified value	Initial specified value or less
	Leakage Current... Initial specified value or less	
Terminal Strength	After applying the pressure load of 5N for 10±1 seconds horizontally to the center of capacitor side body which has no electrode and has been soldered beforehand on an aluminum substrate, there shall be found neither exfoliation nor its sign at the terminal electrode.	After 2000hours' application of rated voltage in series with a 3Ω resistor at 85°C, or derated voltage in series with a 3Ω resistor at 125°C, capacitors meet the characteristic requirements listed below.
	Capacitance Change... Refor to next page (* 1)	

* As for the surge and derated voltage at 125°C, refer to page 266 for details.



SOLID TANTALUM ELECTROLYTIC CAPACITORS

nichicon

F92

■ Standard ratings

Rated Volt	Rated Capacitance (μ F)	Case code	Part Number	Leakage Current (μ A)	Dissipation Factor (%@120Hz)	ESR (Ω @100kHz)	*1 $\Delta C/C$ (%)	Rated Volt	Rated Capacitance (μ F)	Case code	Part Number	Leakage Current (μ A)	Dissipation Factor (%@120Hz)	ESR (Ω @100kHz)	*1 $\Delta C/C$ (%)
2.5V	22	P	F920E226MPA	0.6	20	4.0	*	10V	1	P	F921A105MPA	0.5	8	12.0	*
	22	A	F920E226MAA	0.6	12	2.8	*		1.5	P	F921A155MPA	0.5	8	12.0	*
	33	P	F920E336MPA	0.8	20	4.0	*		1.5	A	F921A155MAA	0.5	6	7.4	*
	33	A	F920E336MAA	0.8	12	2.8	*		2.2	P	F921A225MPA	0.5	8	12.0	*
	47	B	F920E476MBA	1.2	12	1.7	*		2.2	A	F921A225MAA	0.5	6	7.0	*
	68	B	F920E686MBA	1.7	12	1.5	*		3.3	P	F921A335MPA	0.5	8	12.0	*
	100	B	F920E107MBA	2.5	18	1.3	*		3.3	A	F921A335MAA	0.5	6	7.0	*
	150	B	F920E157MBA	3.8	20	1.0	± 15		4.7	P	F921A475MPA	0.5	8	6.0	*
4V	2.2	P	F920G225MPA	0.5	8	12.0	*	16V	4.7	A	F921A475MAA	0.5	6	4.0	*
	3.3	P	F920G335MPA	0.5	8	12.0	*		6.8	P	F921A685MPA	0.7	8	6.0	*
	4.7	P	F920G475MPA	0.5	8	6.0	*		6.8	A	F921A685MAA	0.7	6	4.0	*
	4.7	A	F920G475MAA	0.5	6	4.0	*		10	P	F921A106MPA	1.0	14	6.0	*
	6.8	P	F920G685MPA	0.5	10	6.0	*		10	A	F921A106MAA	1.0	8	4.0	*
	10	P	F920G106MPA	0.5	10	6.0	*		10	B	F921A106MBA	1.0	6	2.0	*
	10	A	F920G106MAA	0.5	8	4.0	*		15	A	F921A156MAA	1.5	8	4.0	*
	15	P	F920G156MPA	0.6	10	5.0	*		22	A	F921A226MAA	2.2	14	4.0	± 15
	22	P	F920G226MPA	0.9	20	5.0	*		22	B	F921A226MBA	2.2	8	1.9	*
	22	A	F920G226MAA	0.9	12	2.8	*		33	B	F921A336MBA	3.3	12	1.9	*
	33	P	F920G336MPA	1.3	20	4.0	*		0.47	P	F921C474MPA	0.5	8	20.0	*
	33	A	F920G336MAA	1.3	12	2.8	*		0.68	P	F921C684MPA	0.5	8	12.0	*
	47	A	F920G476MAA	1.9	18	2.8	*		1	P	F921C105MPA	0.5	8	12.0	*
	47	B	F920G476MBA	1.9	12	1.7	*		1	A	F921C105MAA	0.5	4	10.0	*
	68	A	F920G686MAA	2.7	25	2.8	± 15		1.5	P	F921C155MPA	0.5	8	12.0	*
6.3V	68	B	F920G686MBA	2.7	18	1.5	*		1.5	A	F921C155MAA	0.5	6	7.4	*
	100	B	F920G107MBA	4.0	18	1.3	*		2.2	P	F921C225MPA	0.5	8	12.0	*
	150	B	F920G157MBA	6.0	25	1.3	± 15		2.2	A	F921C225MAA	0.5	6	7.0	*
	1	P	F920J105MPA	0.5	8	12.0	*		3.3	A	F921C335MAA	0.5	6	7.0	*
	1.5	P	F920J155MPA	0.5	8	12.0	*		4.7	A	F921C475MAA	0.8	6	7.0	*
	2.2	P	F920J225MPA	0.5	8	12.0	*		4.7	B	F921C475MBA	0.8	6	3.0	*
	3.3	P	F920J335MPA	0.5	8	12.0	*		6.8	B	F921C685MBA	1.1	6	3.0	*
	4.7	P	F920J475MPA	0.5	8	6.0	*		10	A	F921C106MAA	1.6	8	7.0	± 15
	4.7	A	F920J475MAA	0.5	6	4.0	*		10	B	F921C106MBA	1.6	6	2.0	*
	6.8	P	F920J685MPA	0.5	10	6.0	*		22	B	F921C226MBA	3.5	12	2.0	± 15
	10	P	F920J106MPA	0.6	10	6.0	*	20V	0.22	P	F921D224MPA	0.5	8	20.0	*
	10	A	F920J106MAA	0.6	8	4.0	*		0.33	P	F921D334MPA	0.5	8	20.0	*
	15	P	F920J156MPA	0.9	10	6.0	*		0.47	P	F921D474MPA	0.5	8	20.0	*
	15	A	F920J156MAA	0.9	8	4.0	*		0.47	A	F921D474MAA	0.5	4	10.0	*
	22	P	F920J226MPA	1.4	20	5.0	*		0.68	A	F921D684MAB	0.5	4	10.0	*
	22	A	F920J226MAA	1.4	12	2.8	*		1	P	F921D105MPA	0.5	8	20.0	*
	22	B	F920J226MBA	1.4	8	1.9	*		1	A	F921D105MAA	0.5	4	10.0	*
	33	A	F920J336MAA	2.1	12	2.8	*		1.5	A	F921D155MAA	0.5	6	7.4	*
	33	B	F920J336MBA	2.1	12	1.7	*		2.2	A	F921D225MAA	0.5	6	7.0	*
	47	A	F920J476MAA	3.0	18	2.8	± 15		2.2	B	F921D225MBA	0.5	6	3.0	*
25V	47	B	F920J476MBA	3.0	12	1.7	*		3.3	B	F921D335MBA	0.7	6	3.0	*
	100	B	F920J107MBA	6.3	20	1.3	± 15		4.7	B	F921D475MBA	0.9	6	3.0	*
	0.47	A	F921E474MAA	0.5	4	10.0	*	35V	0.68	B	F921E684MBA	0.5	4	4.0	*
	0.68	B	F921E684MBA	0.5	4	4.0	*		1	P	F921E105MPA	0.5	8	20.0	*
	1	P	F921E105MPA	0.5	6	10.0	*		1	B	F921E105MBA	0.5	4	4.0	*
	1	A	F921E105MAA	0.5	6	10.0	*		2.2	A	F921E225MAA	0.6	8	10.0	± 15
	2.2	A	F921E225MAA	0.6	8	10.0	*		2.2	B	F921E225MBA	0.6	6	4.0	*
	4.7	B	F921E475MBA	1.2	6	3.0	*		4.7	B	F921V224MAB	0.5	4	10.0	*
	0.22	A	F921V334MAA	0.5	4	10.0	*		0.33	A	F921V474MAB	0.5	4	10.0	*
	0.47	A	F921V474MAB	0.5	4	10.0	*		0.68	B	F921V684MBA	0.5	4	4.0	*
35V	0.68	B	F921V684MBA	0.5	4	4.0	*		1	A	F921V105MAA	0.5	6	10.0	*
	1	A	F921V105MAA	0.5	6	10.0	*		2.2	B	F921V225MBA	0.8	6	4.0	± 10
	2.2	B	F921V225MBA	0.8	6	4.0	*								

*1 : $\Delta C/C$

Item	P Case (%)	A , B Case(%)
Damp Heat	± 20	± 10
Temperature cycles	± 10	± 5