
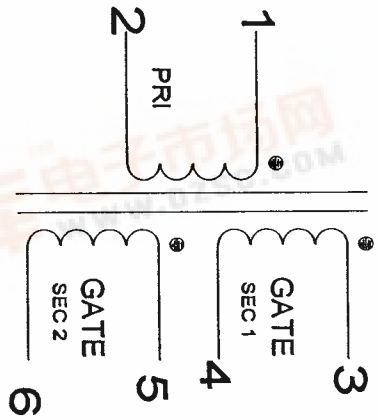


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032
GDE25-2.DC2

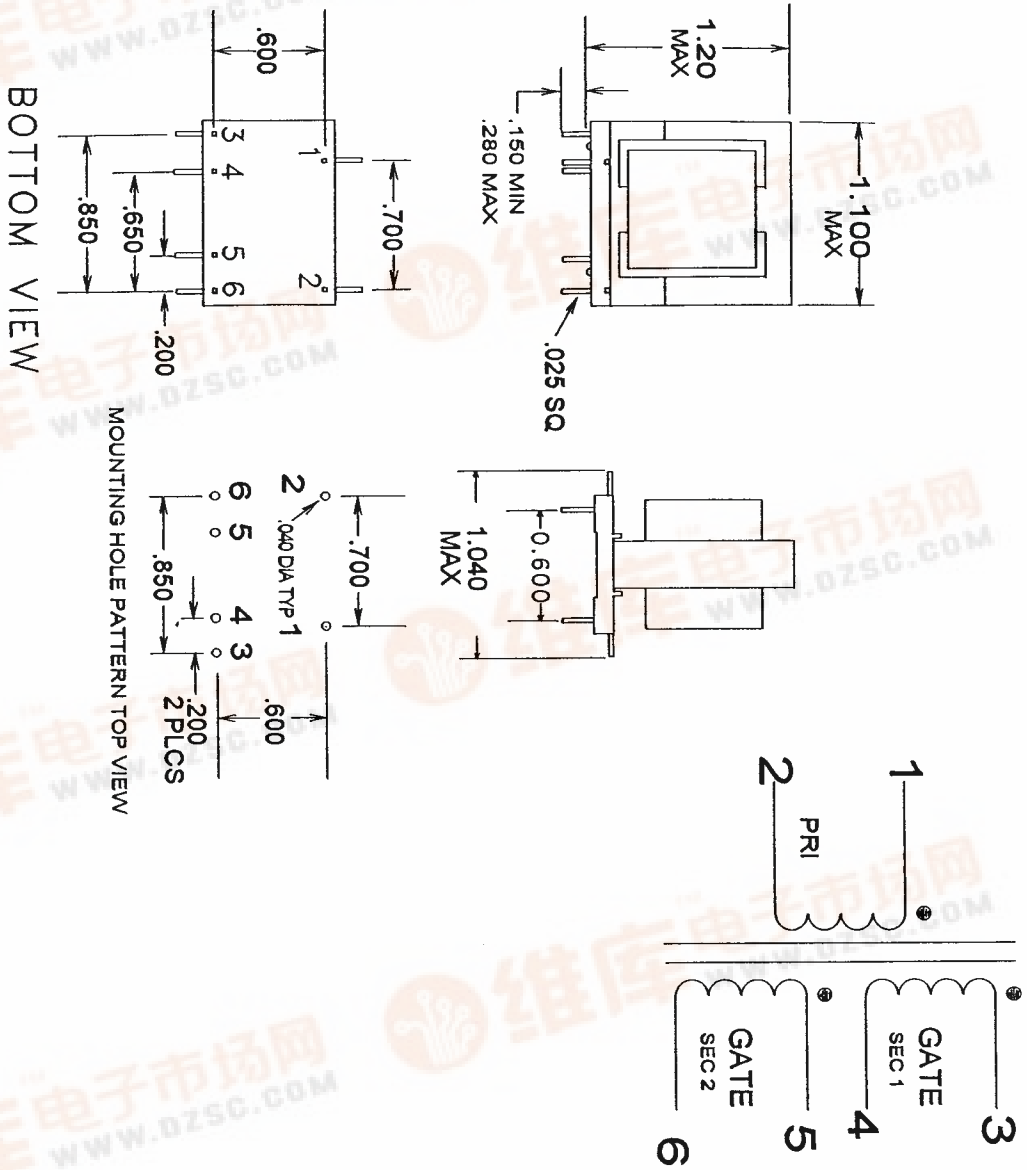

PRODUCTION TESTS

DC
TURNS RATIO = 100%

RESISTANCE
IN OHMS
(1 - 2) .200 MAX
(3 - 4) .400 MAX
(5 - 6) .400 MAX

APPLY = .1V @ 10 KHz PIN (1 - 2)

INDUCTANCE = 680 uHYS MIN PINS (1 - 2)

LEAKAGE INDUCTANCE = 250 uHYS MAX 1 TO 2
WITH 3 TO 6 SHORTED AND 5 TO 6 SHORTED

HIPOT = 4125 VRMS 1 SEC MIN PRI TO SEC

2500 VRMS 1 SEC MIN SEC TO CORE

2500 VRMS 1 SEC MIN PRI TO CORE

2500 VRMS 1 SEC MIN SEC TO SEC

CONTINUITY =

IMPRGNATION NOTES = 2 HR PREHEAT

PINS MUST BE FREE OF IMPREGNATION

FINAL ASSEMBLY NOTES

MagneTek

PART NO. GDE25-2

METHOD

BUTT WITH NO GAP

MARKING OUR#, DATECODE, SITECODE, B3
ON LABEL ON CORE