

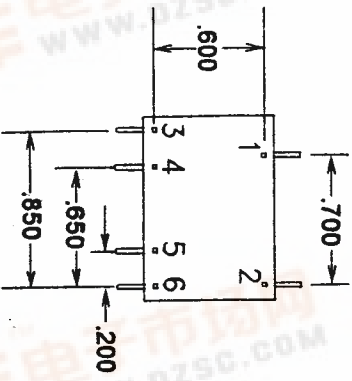
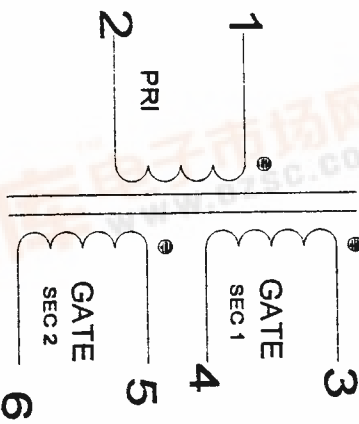



TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

GDE25-6.DC2

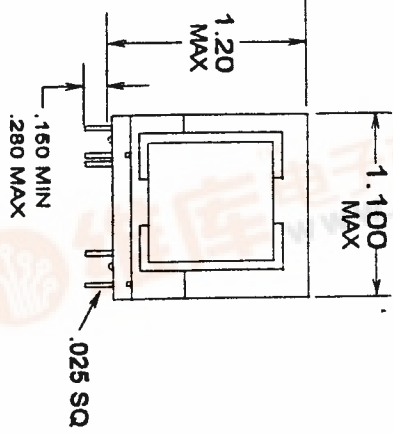

BOTTOM VIEW

MOUNTING HOLE PATTERN TOP VIEW

PRODUCTION TESTS

DC

RESISTANCE	(1 - 2) .180 MAX
IN OHMS	(3 - 4) 1.00 MAX
	(5 - 6) 1.10 MAX

APPLY = .1V @ 10 KHz PIN (1 - 2)

INDUCTANCE = 680 uHYS MIN

LEAKAGE INDUCTANCE = 3.50 uHYS MAX
WITH 3 TO 6 SHORTED AND 5 TO 6 SHORTED

HIPOT = 4125 VRMS 1 SEC MIN PRI TO SEC

2500 VRMS 1 SEC MIN SEC TO CORE

2500 VRMS 1 SEC MIN PRI TO CORE

2500 VRMS 1 SEC MIN SEC TO SEC

CONTINUITY -

FINAL ASSEMBLY NOTES

MagneTek

PART NO. GDE25-6

