


10/100BASE-TX QUAD PORT TRANSFORMER MODULES

For Use with Level One's LXT974, LXT975
and LXT980 Series of PHY Solutions

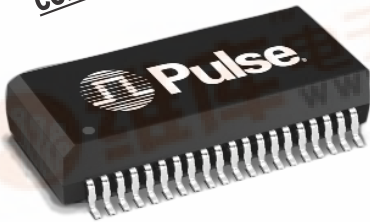

- RoHS-6 peak reflow temperature rating: 245°C
- RoHS-5 peak reflow temperature rating: 235°C
- Meets IEEE 802.3 specification
- Models designed to support four single- or double-stacked RJ-45 connectors


Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

RoHS-5 ⁴ Compliant Part Number	RoHS-6 ⁵ Compliant Part Number	Insertion Loss (dB TYP)	Return Loss (dB TYP)				Crosstalk (dB MIN)				Common to Common Rejection Ratio 0.1-60MHz (dB MIN)		Differential to Common Mode Rejection (dB MIN)	
		0.1-100MHz	2-30MHz	40MHz	50MHz	60-80MHz	1MHz	30MHz	60MHz	100MHz	Transmit	Receive	1-60MHz	60-200MHz
H1068	H1068NL ^{3d}	-0.5	-21	-17	-14.5	-12	-60	-50	-40	-35	-30	-30	-40	-30
H1069	H1069NL ^{3d}	-0.5	-21	-17	-14.5	-12	-60	-50	-40	-35	-30	-30	-40	-30
H1074	H1074NL ^{3d}	-0.5	-21	-17	-14.5	-12	-60	-50	-40	-30	-30	-30	-40	-30

- All product meets input/output breakdown (HiPot) of 1500 Vrms.
- For Tape & Reel packaging, add suffix "T" to the end of the part number e. g. H1069T
- MSL=Moisture Sensitivity Level a=1 b=2 c=3 d=4
- RoHS-5: Product does not contain 5 out of the 6 banned substances specified in the RoHS directive (product contains lead in applications considered solder).
- RoHS-6: Product does not contain 5 out of the 6 banned substances specified in the RoHS directive. Some internal connections may contain lead in high-temperature solder (solder alloys containing more than 85% lead).

Mechanical

H10XX

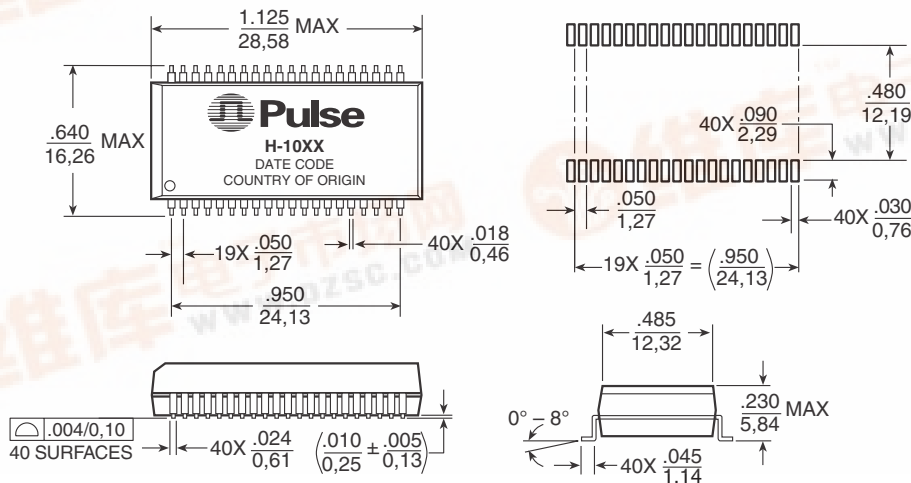

Dimensions: Inches
mm

Unless otherwise specified, all tolerances are ± 0.10
0.25


10/100BASE-TX QUAD PORT TRANSFORMER MODULES

For Use with Level One's LXT974, LXT975
and LXT980 Series of PHY Solutions




Schematics

H1068

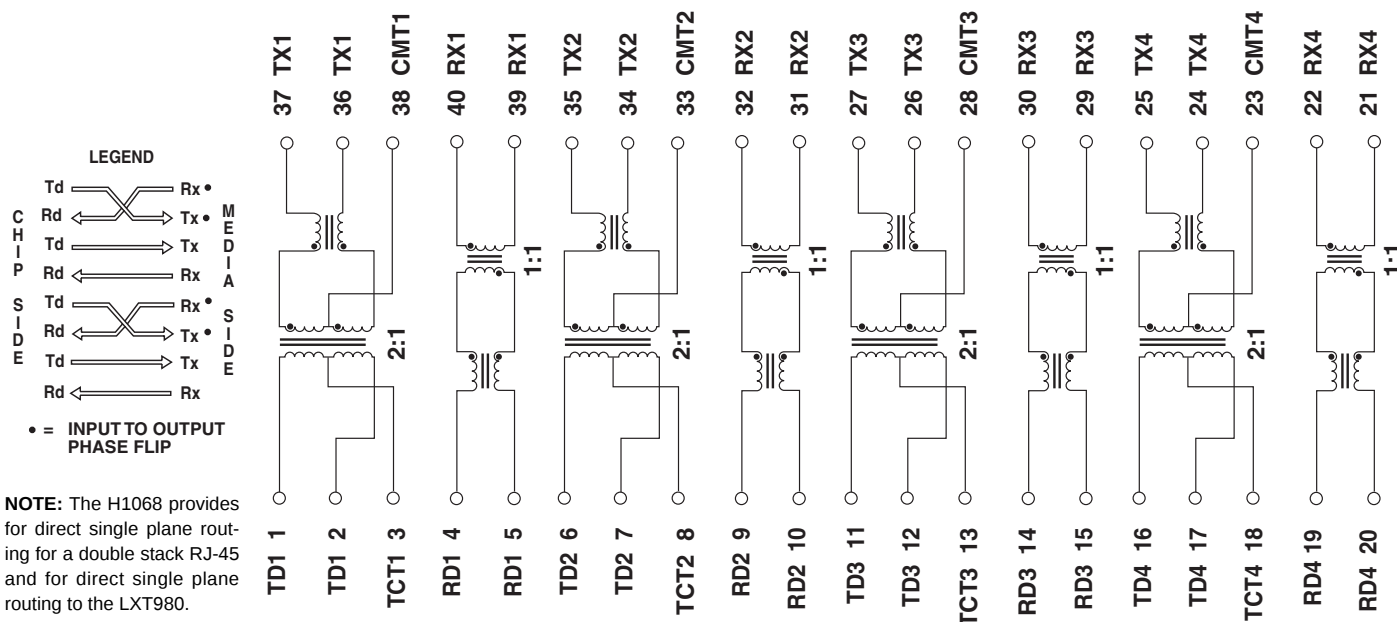

H1069

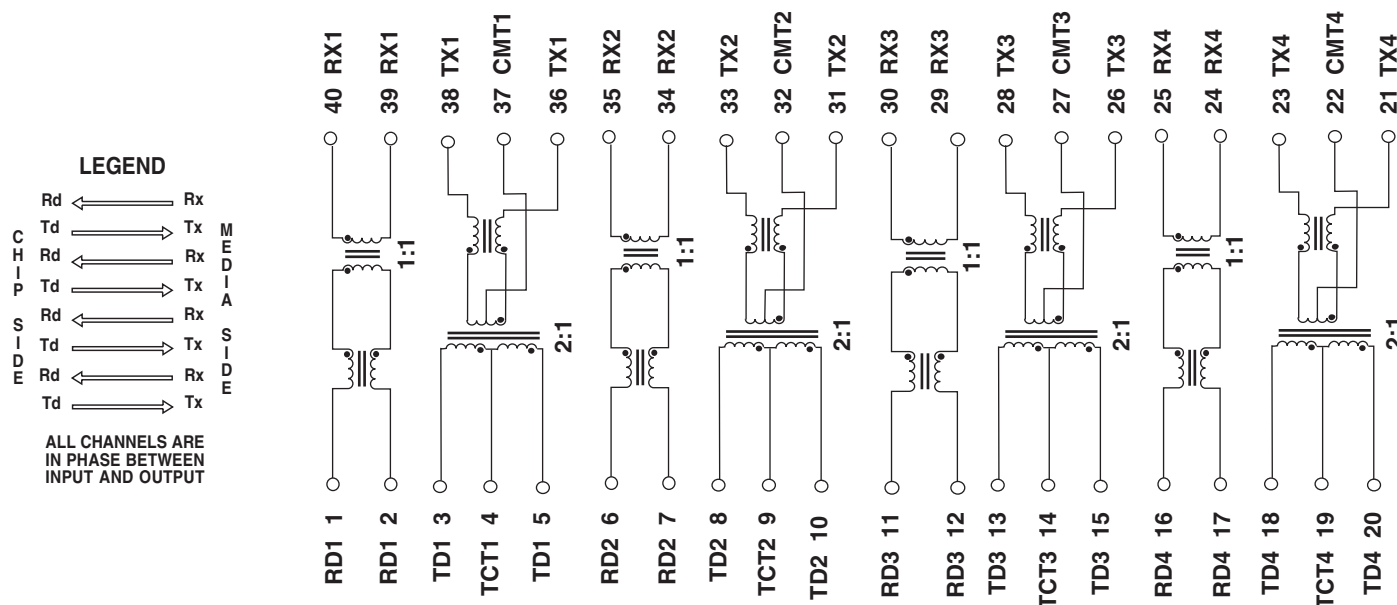


10/100BASE-TX QUAD PORT TRANSFORMER MODULES

For Use with Level One's LXT974, LXT975
and LXT980 Series of PHY Solutions




Schematic

H1074

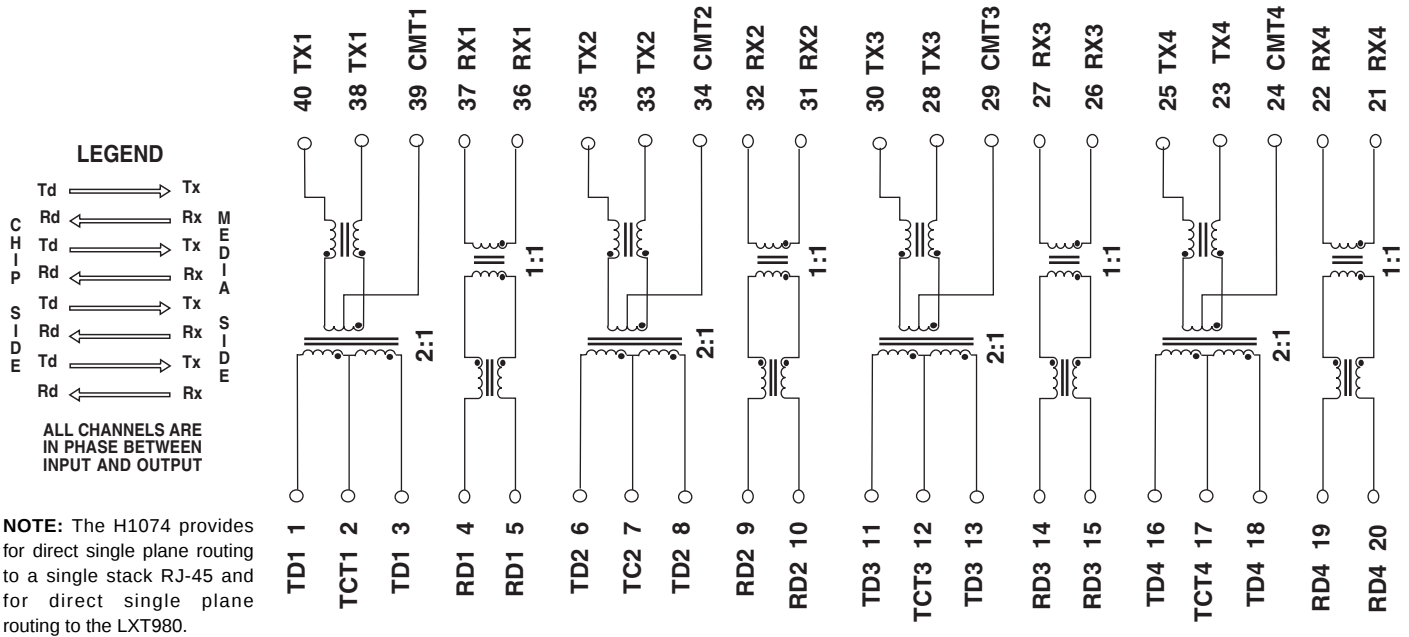

NOTE: The H1074 provides for direct single plane routing to a single stack RJ-45 and for direct single plane routing to the LXT980.

Tape and Reel Specifications

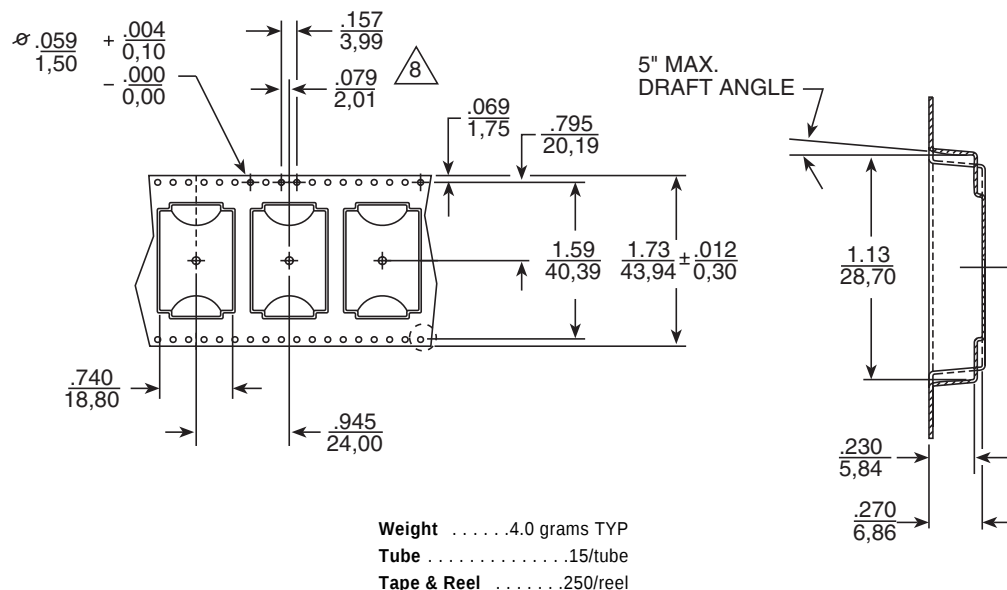

10/100BASE-TX QUAD PORT TRANSFORMER MODULES

For Use with Level One's LXT974, LXT975
and LXT980 Series of PHY Solutions



For More Information:

Pulse Worldwide Headquarters

12220 World Trade Dr.
San Diego, CA 92128
U.S.A.

www.pulseeng.com

TEL: 858 674 8100
FAX: 858 674 8262

Pulse European Headquarters

Einsteinstrasse 1
71083 Herrenberg
Germany

TEL: 49 7032 7806 0
FAX: 49 7032 7806 12

Pulse China Headquarters

No. 1
Industrial District
Changan, Dongguan
China

TEL: 86 769 85538070
FAX: 86 769 85538870

Pulse North China

Room 1503
XinYin Building
No. 888 YiShan Rd.
Shanghai 200233
China

TEL: 86 21 54643211/2
FAX: 86 21 54643210

Pulse South Asia

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324

TEL: 65 6287 8998
FAX: 65 6280 0080

Pulse North Asia

No. 26
Kao Ching Rd.
Yang Mei Chen
Taoyuan Hsien
Taiwan, R. O. C.

TEL: 886 3 4641811
FAX: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2006. Pulse Engineering, Inc. All rights reserved.