


IDCP-3722

Vishay Dale



High Current, Surface Mount Inductor

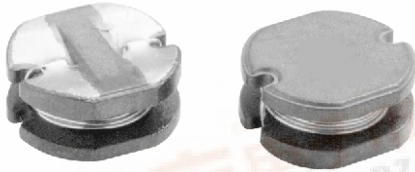

ELECTRICAL SPECIFICATIONS

Inductance Range: 10.0 μ H to 820 μ H

Inductance Tolerance: 20 %

Operating Temperature: - 25 °C to + 105 °C

Storage Temperature: - 40 °C to + 125 °C

Resistance to Solder Heat: 260 °C for 10 seconds

FEATURES

- High energy storage
- Low resistance
- Tape and reel packaging for automatic handling
- 100 % lead (Pb)-free and RoHS compliant

RoHS
COMPLIANT

MATERIALS

Core: Ferrite

Wire: Enamelled copper wire

Terminal: Ni + Sn/Ag/Cu

STANDARD ELECTRICAL SPECIFICATIONS

INDUCTANCE (μ H)	TEST FREQUENCY L	DCR MAXIMUM (Ohms)	RATED DC CURRENT* (A)
10.0	2.52 MHz	0.06	2.60
12.0	2.25 MHz	0.07	2.45
15.0	2.25 MHz	0.08	2.27
18.0	2.25 MHz	0.09	2.15
22.0	2.25 MHz	0.10	1.95
27.0	2.25 MHz	0.11	1.76
33.0	2.25 MHz	0.12	1.50
39.0	2.25 MHz	0.14	1.37
47.0	2.25 MHz	0.17	1.28
56.0	2.25 MHz	0.19	1.17
68.0	2.25 MHz	0.22	1.11
82.0	2.25 MHz	0.25	1.00
100.0	1 kHz	0.35	0.97
120.0	1 kHz	0.40	0.89
150.0	1 kHz	0.47	0.78
180.0	1 kHz	0.63	0.72
220.0	1 kHz	0.73	0.66
270.0	1 kHz	0.97	0.57
330.0	1 kHz	1.15	0.52
390.0	1 kHz	1.30	0.48
470.0	1 kHz	1.48	0.42
560.0	1 kHz	1.90	0.33
680.0	1 kHz	2.25	0.28
820.0	1 kHz	2.55	0.24

*Rated Current: Value obtained when current flows and the temperature has risen 40 °C or when DC current flows and the initial value of inductance has fallen by 10 %, whichever is smaller.

DIMENSIONS in inches [millimeters]

TYPICAL PAD LAYOUT		
A	B	C
0.394 $\pm$ 0.02 [10.0 $\pm$ 0.4]	0.213 $\pm$ 0.02 [5.4 $\pm$ 0.4]	0.355 $\pm$ 0.02 [9.0 $\pm$ 0.4]
D	E	F
0.374 [9.5]	0.148 [3.75]	0.099 [2.5]

DESCRIPTION

IDCP-3722 MODEL	10 μ H INDUCTANCE VALUE	$\pm$ 20 % INDUCTANCE TOLERANCE	ER PACKAGE CODE	e1 JEDEC LEAD (Pb)-FREE STANDARD
GLOBAL PART NUMBER				
I D C P	3 7 2 2	E R	1 0 0	M
MODEL	SIZE	PACKAGE CODE	INDUCTANCE VALUE	INDUCTANCE TOLERANCE



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.