


IDCS-5020

Vishay Dale



High Current, Surface Mount Inductor

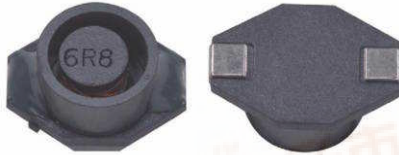

ELECTRICAL SPECIFICATIONS

Inductance Range: 1.0 μ H to 390.0 μ H, tested at 1.0 Vrms

Inductance Tolerance: 20 %, tighter tolerances available upon request

Operating Temperature: - 40 °C to + 125 °C

Resistance to Solder Heat: 260 °C for 10 seconds

FEATURES

- High energy storage
- Low resistance
- Magnetically shielded
- Tape and reel packaging for automatic handling
- 100 % lead (Pb)-free and RoHS compliant



RoHS
COMPLIANT

MATERIALS

Core: Ferrite

Wire: Enamelled copper wire

Base: LCP

Terminal: Nickel bronze

Adhesive: Epoxy resin

STANDARD ELECTRICAL SPECIFICATIONS

IND. (μ H)	TOLERANCE	TEST FREQUENCY L (kHz)	DCR MAX. (Ohms)	Isat (Amps)	Irms (Amps)
1.0	$\pm 20 \%$	100	0.021	5.6	5.0
1.5	$\pm 20 \%$	100	0.022	5.2	4.5
2.2	$\pm 20 \%$	100	0.032	5.0	3.8
3.3	$\pm 20 \%$	100	0.039	3.9	3.3
4.7	$\pm 20 \%$	100	0.054	3.2	2.7
6.8	$\pm 20 \%$	100	0.075	2.8	2.2
10	$\pm 20 \%$	100	0.101	2.4	2.0
15	$\pm 20 \%$	100	0.150	2.0	1.5
22	$\pm 20 \%$	100	0.207	1.6	1.3
33	$\pm 20 \%$	100	0.334	1.4	1.1
47	$\pm 20 \%$	100	0.472	1.0	0.80
56	$\pm 20 \%$	100	0.210	0.95	0.90
68	$\pm 20 \%$	100	0.340	0.90	0.82
82	$\pm 20 \%$	100	0.380	0.85	0.75
100	$\pm 20 \%$	100	0.420	0.80	0.68
120	$\pm 20 \%$	100	0.460	0.70	0.60
150	$\pm 20 \%$	100	0.520	0.60	0.55
180	$\pm 20 \%$	100	0.700	0.65	0.50
220	$\pm 20 \%$	100	0.800	0.50	0.45
270	$\pm 20 \%$	100	1.100	0.45	0.40
330	$\pm 20 \%$	100	1.200	0.40	0.35
390	$\pm 20 \%$	100	1.400	0.35	0.33

Inductance drop = 10 % typ. at Isat

$\Delta T = 15 \text{ }^{\circ}\text{C}$ typ. at Irms

DIMENSIONS in inches [millimeters]

A (Max.)	B (Max.)	D (Max.)	E	F	G	H	I	J
0.510 [12.95]	0.370 [9.40]	0.200 [5.08]	0.100 [2.54]	0.100 [2.54]	0.300 [7.62]	0.115 [2.92]	0.290 [7.37]	0.110 [2.79]

DESCRIPTION

IDCS-5020	10 μ H	$\pm 20 \%$	ER	e3
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER

I	D	C	S	5	0	2	0	E	R	1	0	0	M
MODEL				SIZE				PACKAGE CODE		INDUCTANCE VALUE			INDUCTANCE TOLERANCE



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.