

# IMCH-1812

Vishay Dale



## Surface Mount, Molded Inductors



### FEATURES

- Molded construction provides superior strength and moisture resistance
- Tape and reel packaging for automatic handling, 500/reel, EIA-481
- Compatible with vapor phase, infrared and wave soldering methods



**RoHS**  
COMPLIANT

### ELECTRICAL SPECIFICATIONS

**Inductance:** 1 uH to 330 uH  
**Inductance Tolerance:** ± 10 %  
**Operating Temperature:** - 25 °C to 85 °C Storage  
**Temperature:** - 40 °C to + 100 °C

### TEST EQUIPMENT


L & Q: H/P 4285A  
 SRF: H/P 4286A  
 DCR: H/P 34401

### STANDARD ELECTRICAL SPECIFICATIONS

IND. (μH)	TOL.*	Q MIN.	TEST FREQ. L & Q (MHz)	SELF-RESONANT FREQ. MIN. (MHz)	DCR MAX. (Ohms)	RATED* DC CURRENT (mA)
1.0	± 10 %	10	7.96	200	0.11	1050
1.2	± 10 %	10	7.96	160	0.12	1000
1.5	± 10 %	10	7.96	130	0.15	950
1.8	± 10 %	10	7.96	100	0.16	900
2.2	± 10 %	10	7.96	60.0	0.18	850
2.7	± 10 %	10	7.96	60.0	0.20	800
3.3	± 10 %	10	7.96	45.0	0.22	750
3.9	± 10 %	10	7.9	40.0	0.24	700
4.7	± 10 %	10	7.96	35.0	0.3	650
5.6	± 10 %	10	7.96	30.0	0.3	650
6.8	± 10 %	10	7.96	28.0	0.4	600
8.2	± 10 %	10	7.96	25.0	0.4	600
10	± 10 %	10	2.52	22.0	0.5	550
12	± 10 %	10	2.52	21.0	0.6	500
15	± 10 %	10	2.52	20.0	0.7	450
18	± 10 %	10	2.52	19.0	0.8	400
22	± 10 %	10	2.52	18.0	0.9	370
27	± 10 %	10	2.52	16.0	1.2	330
33	± 10 %	10	2.52	14.0	1.4	300
39	± 10 %	10	2.52	12.0	1.6	280
47	± 10 %	10	2.52	11.5	1.9	260
56	± 10 %	10	2.52	11.0	2.2	240
68	± 10 %	10	2.52	10.0	2.6	220
82	± 10 %	10	2.52	9.0	3.5	200
100	± 10 %	20	0.796	8.0	4.0	180
120	± 10 %	20	0.796	6.5	4.5	160
150	± 10 %	20	0.796	7.0	6.5	140
180	± 10 %	20	0.796	5.5	7.5	120
220	± 10 %	20	0.796	5.5	9	120
270	± 10 %	20	0.796	5.0	11	100
330	± 10 %	20	0.796	4.0	13	90

\*Rated DC Current based on the maximum temperature rise, not to exceed 40 °C at + 85 °C ambient.

### DIMENSIONS in inches [millimeters]

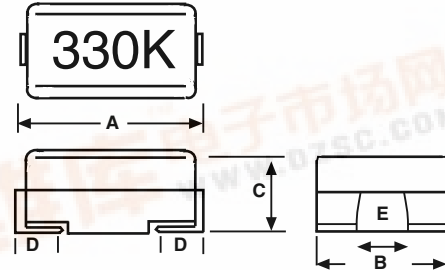

A	B	C
0.177 ± 0.012 [4.5 ± 0.3]	0.126 ± 0.008 [3.2 ± 0.2]	0.126 ± 0.008 [3.2 ± 0.2]
D	E	
0.035 ± 0.008 [0.9 ± 0.2]	0.055 ± 0.008 [1.4 ± 0.2]	

### EIA PART MARKING

- Inductance Value

DESCRIPTION													
IMCH-1812 MODEL	22 μF INDUCTANCE VALUE	± 10 % INDUCTANCE TOLERANCE	ER PACKAGE CODE	e3 JEDEC LEAD (Pb)-FREE STANDARD									
GLOBAL PART NUMBER													
I	M	C	H	1	8	1	2	E	R	2	2	0	K
MODEL				SIZE			PACKAGE CODE		INDUCTANCE VALUE			TOL.	



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.