




IM-6-RFCS-40

Vishay Dale

Inductors, Commercial, Molded



STANDARD ELECTRICAL SPECIFICATIONS

MODEL*	IND. (μH)	TOL.	Q MIN.	TEST FREQ. (MHz)	SRF MIN. (MHz)	DCR MAX. (Ohms)	RATED DC CURRENT (mA)	
IM-6RFCS-40	0.10	± 10 %	75	50	400	0.02	4000	PHENOLIC CORE
IM-6RFCS-40	0.12	± 10 %	75	50	400	0.025	3500	
IM-6RFCS-40	0.15	± 10 %	75	50	400	0.03	3000	
IM-6RFCS-40	0.18	± 10 %	75	50	400	0.03	3000	
IM-6RFCS-40	0.22	± 10 %	75	50	400	0.03	3000	
IM-6RFCS-40	0.27	± 10 %	70	45	376	0.04	2700	
IM-6RFCS-40	0.33	± 10 %	70	40	352	0.05	2500	
IM-6RFCS-40	0.39	± 10 %	65	40	320	0.08	2000	
IM-6RFCS-40	0.47	± 10 %	60	25	288	0.08	2000	
IM-6RFCS-40	0.56	± 10 %	55	25	264	0.10	1700	
IM-6RFCS-40	0.68	± 10 %	55	25	240	0.12	1500	
IM-6RFCS-40	0.82	± 10 %	50	25	220	0.18	1300	
IM-6RFCS-40	1.0	± 10 %	50	20	200	0.24	1100	
IM-6RFCS-40	1.2	± 10 %	45	20	176	0.35	1000	
IM-6RFCS-40	1.5	± 10 %	45	15	160	0.43	850	
IM-6RFCS-40	1.8	± 10 %	45	15	144	0.65	720	
IM-6RFCS-40	2.2	± 10 %	45	15	132	0.80	610	
IM-6RFCS-40	2.7	± 10 %	55	10	88	0.12	1600	IRON CORE
IM-6RFCS-40	3.3	± 10 %	55	10	80	0.15	1400	
IM-6RFCS-40	3.9	± 10 %	60	10	76	0.23	1200	
IM-6RFCS-40	4.7	± 10 %	70	7.9	72	0.30	1000	
IM-6RFCS-40	5.6	± 10 %	65	7.9	64	0.45	900	
IM-6RFCS-40	6.8	± 10 %	65	7.9	56	0.55	800	
IM-6RFCS-40	8.2	± 10 %	60	7.9	52	0.65	720	
IM-6RFCS-40	10	± 10 %	60	5.0	48	0.73	650	
IM-6RFCS-40	12	± 10 %	65	5.0	42	1.1	590	
IM-6RFCS-40	15	± 10 %	80	2.5	38	1.4	500	
IM-6RFCS-40	18	± 10 %	75	2.5	34	1.6	460	
IM-6RFCS-40	22	± 10 %	75	2.5	32	1.8	430	
IM-6RFCS-40	27	± 5 %	75	2.5	29	2.7	360	
IM-6RFCS-40	33	± 5 %	85	2.5	26	3.5	300	
IM-6RFCS-40	39	± 5 %	80	2.5	21	3.8	290	
IM-6RFCS-40	47	± 5 %	80	2.5	18	4.0	275	
IM-6RFCS-40	56	± 5 %	75	2.5	15	4.4	265	
IM-6RFCS-40	68	± 5 %	75	2.5	13	4.7	250	
IM-6RFCS-40	82	± 5 %	75	2.5	10	5.3	235	
IM-6RFCS-40	100	± 5 %	75	1.5	8.0	6.0	220	
IM-6RFCS-40	120	± 5 %	65	0.79	5.7	5.0	170	
IM-6RFCS-40	150	± 5 %	65	0.79	5.4	5.8	164	
IM-6RFCS-40	180	± 5 %	65	0.79	5.0	6.6	158	
IM-6RFCS-40	220	± 5 %	65	0.79	4.7	7.4	155	
IM-6RFCS-40	270	± 5 %	65	0.79	4.5	8.0	150	
IM-6RFCS-40	300	± 5 %	65	0.79	4.2	8.6	145	
IM-6RFCS-40	330	± 5 %	65	0.79	4.0	8.9	142	
IM-6RFCS-40	360	± 5 %	65	0.79	3.8	9.6	137	
IM-6RFCS-40	390	± 5 %	65	0.79	3.6	9.9	135	
IM-6RFCS-40	430	± 5 %	65	0.79	3.4	10.4	131	
IM-6RFCS-40	470	± 5 %	65	0.79	3.2	10.9	128	
IM-6RFCS-40	510	± 5 %	65	0.79	3.0	11.6	124	
IM-6RFCS-40	560	± 5 %	65	0.79	2.9	11.8	123	
IM-6RFCS-40	620	± 5 %	60	0.79	2.8	12.5	120	
IM-6RFCS-40	680	± 5 %	60	0.79	2.7	13.5	115	
IM-6RFCS-40	750	± 5 %	60	0.79	2.6	14.0	113	
IM-6RFCS-40	820	± 5 %	60	0.79	2.5	15.0	110	
IM-6RFCS-40	910	± 5 %	60	0.79	2.4	15.5	107	
IM-6RFCS-40	1000	± 5 %	60	0.79	2.2	16.5	104	

* Model electricals and tolerances shown

FEATURES

- Classification is Grade 1, Class B
- Inductance range is 0.10 μH to 1000 μH
- Proven reliability molded inductors



RoHS COMPLIANT

ELECTRICAL SPECIFICATIONS

Inductance Tolerance: ± 10 % on Q-Meter for 0.10 μH to 22 μH
 ± 5 % 1000 cps bridge for 27 μH to 100 μH
 ± 5 % on Q-Meter for 120 μH to 1000 μH

NOTE: L and Q are not always tested at the same frequency. Inductance values that are tested on Q-Meter, are tested at standard test frequencies.

Dielectric Strength: 700 VRMS at sea level

Operating Temperature: - 55 °C to + 125 °C

Self-Resonant Frequency: Minimum SRF measured with full length leads on Grid-Dip Meter

Q: Measured on Q-Meter

MECHANICAL SPECIFICATIONS

Terminal Strength: Meets 5 pound pull test per MIL-PRF-15305 (latest revision)

DENSITY SPECIFICATIONS


Weight: 0.9 gram maximum

ENVIRONMENTAL SPECIFICATIONS

Moisture and Shock Resistance: Meets requirements of MIL-PRF-15305, Grade 1, Class B

Vibration: High frequency, 10 Hz to 2000 Hz at 20 g ± 10 % maximum for 12 logarithmic swings, each of 20 minute duration repeated for each of three mutually perpendicular planes

DIMENSIONS in inches [millimeters]

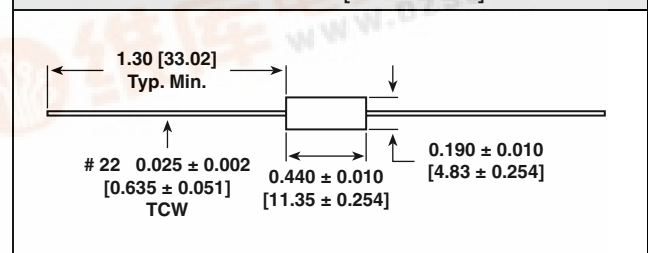

MARKING

- Color coded per MIL-PRF-15305 (latest revision)



IM-6-RFCS-40

Vishay Dale


Inductors,
Commercial, Molded



ORDERING INFORMATION

IM-6RFCS-40	10 μH	10 %	ER	e2
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER

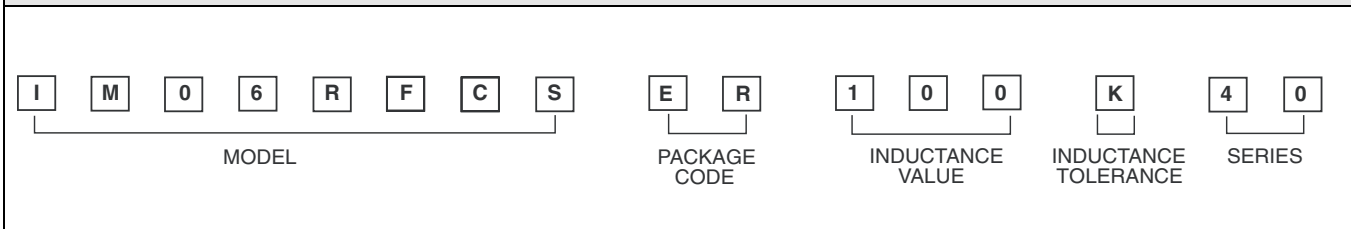



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.