

查询KFF6402A供应商

# Ceramic Monoblock Bandpass Filter

**CTS** WIRELESS COMPONENTS

捷多邦, 专业PCB打样工厂 24小时加急出货

# Model KFF6402A Technical Data

## Features:

- Small Size
- High Performance

## Description and Applications:

This 4 pole monoblock filter is designed primarily for TCAS applications at 1090 MHz in the radionavigation band.




## Electrical Specifications

Parameters	Frequency	Specifications @ 25° C
Insertion Loss	1087 MHz to 1093 MHz	2.0 dB max.
Forward Return Loss		12.0 dB min.
Attenuation	1030 MHz	35.0 dB min.
Power Rating		1 W
Impedance		50 Ω


NOTE: Supplier shall test each filter to the critical electrical specifications listed above or better. Any subsequent audits may deviate due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:

Specification	Typical Allowance
Insertion Loss	0.1 dB
Return Loss	1.0 dB
Stopbands	1.0 dB

**Typical Response Curve**

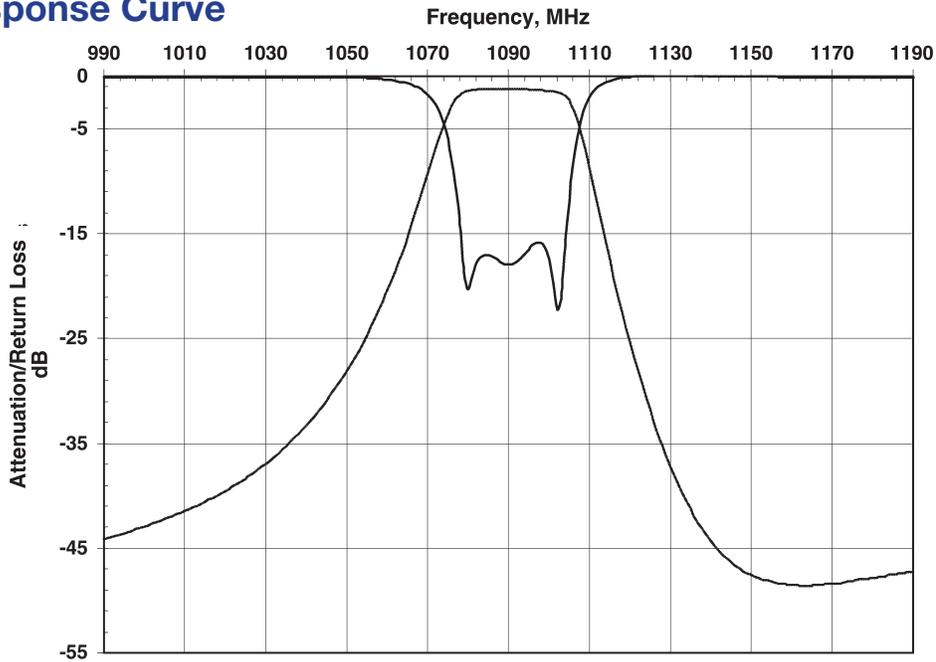


**Mechanical Dimensions**

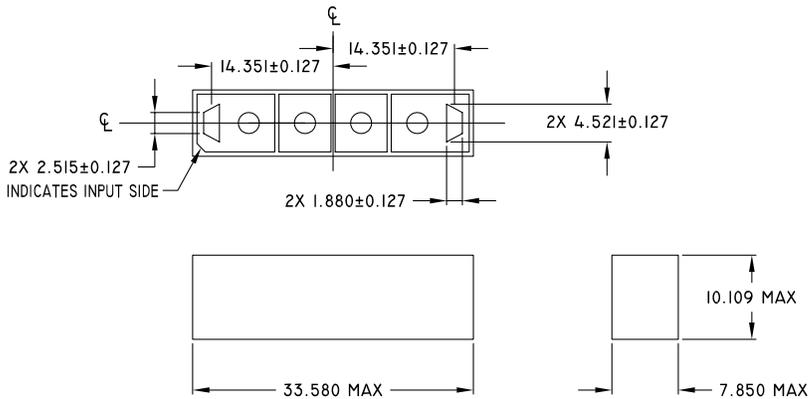

All dimensions in mm

**PC Board Layout**

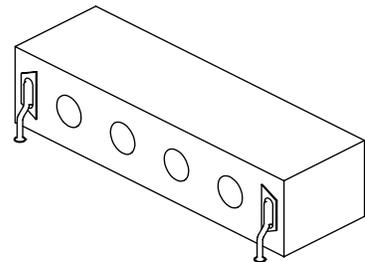

CONNECT TO I/O PADS USING WIRE LEADS.


**Part Marking**

Y = LAST DIGIT OF YEAR  
WW = SEQUENTIAL WEEK NUMBER



**Packaging**

This product is shipped in pre-formed foam trays.



**Contact Information:**