


NAIS

ULTRA LOW PROFILE 2 AMP. POLARIZED RELAY

TK-RELAYS



mm inch

FEATURES

- Low profile 4 mm .157 inch height
- High contact capacity: 2 A
- Surge withstand voltage between contact and coil: 2,500 V (Bellcore rating)

SPECIFICATIONS

Contact

Arrangement	1 Form C		
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)	50 mΩ		
Contact material	Gold-clad silver alloy		
Rating	Nominal switching capacity (resistive load)	2 A 30 V DC	
	Max. switching power (resistive load)	60 W	
	Max. switching voltage	220 V DC	
	Max. switching current	2 A	
	Min. switching capacity ※1	10 μA 10 mV DC	
Nominal operating power	Single side stable	140 mW (1.5 to 12 V DC) 270 mW (24 V DC)	
	1 coil latching	100 mW (1.5 to 12 V DC) 150 mW (24 V DC)	
	2 coil latching	200 mW (1.5 to 9 V DC) 250 mW (12 V DC) 400 mW (24 V DC)	
Expected life (min. operations)	Mechanical (at 180 cpm)	10 ⁸ (Single side stable)	
		5 × 10 ⁷ (1 or 2 coil latching)	
	Electrical (at 20 cpm)	2 A 30 V DC resistive	10 ⁵

Note:

※1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

Remarks

- * Specifications will vary with foreign standards certification ratings.
- *1 Measurement at same location as "Initial breakdown voltage" section.
- *2 By resistive method, nominal voltage applied to the coil; contact carrying current: 2 A.
- *3 Nominal voltage applied to the coil, excluding contact bounce time.
- *4 Nominal voltage applied to the coil, excluding contact bounce time without diode.
- *5 Half-wave pulse of sine wave: 6 ms; detection time: 10 μs.
- *6 Half-wave pulse of sine wave: 6 ms.
- *7 Detection time: 10 μs.
- *8 Refer to 4. Conditions for operation, transport and storage mentioned in Cautions for use (Page 178).
- *9 The maximum ambient temperature allows for coil temperature rise at maximum allowable coil voltage.
As for the applicable range of continuous carrying current against temperature, please refer to "Maximum value of continuous carrying current" chart. (Page 175)

Characteristics

Initial insulation resistance*1		Min. 1,000 MΩ (at 500 V DC)
Initial breakdown voltage	Between open contacts	750 Vrms for 1 min. (Detection current: 10 mA)
	Between contact and coil	1,500 Vrms for 1 min. (Detection current: 10 mA)
FCC surge voltage between open contacts (10×160 μs)		1,500 V
Surge voltage between contacts and coil (2×10 μs) [Bellcore]		2,500 V
Temperature rise*2 (at 20°C)		Max. 50°C
Operate time [Set time]*3 (at 20°C)		Max. 3 ms (Approx. 1.5 ms) [Max. 3 ms (Approx. 1 ms)]
Release time [Reset time]*4 (at 20°C)		Max. 2 ms (Approx. 1 ms) [Max. 3 ms (Approx. 1 ms)]
Shock resistance	Functional*5	Min. 750 m/s ² {75 G}
	Destructive*6	Min. 1,000 m/s ² {100 G}
Vibration resistance	Functional*7	196 m/s ² {20G}, 10 to 55 Hz at double amplitude of 3.3 mm
	Destructive	294 m/s ² {30G}, 10 to 55 Hz at double amplitude of 5 mm
Conditions for operation, transport and storage*8 (Not freezing and condensing at low temperature)	Ambient temperature*9	−40°C to +85°C −40°F to +185°F
	Humidity	5 to 85% R.H.
Unit weight		Approx. 1 g .035 oz.

ORDERING INFORMATION

EX. TK 1 — L2 — H — 12V

Contact arrangement	Operating function	Terminal shape	Coil voltage (DC)
1: 1 Form C	Nil: Single side stable L: 1 coil latching L2: 2 coil latching	Nil: Standard PC board terminal H: Self-clinching terminal	1.5, 3, 4.5, 5, 6, 9, 12, 24V

TYPES AND COIL DATA (at 20°C 68°F)

1. Single side stable

Part No.		Nominal voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Nominal operating current, mA (±10%)	Coil resistance, Ω (±10%)	Nominal operating power, mW	Max. allowable voltage, V DC
Standard PC board terminal	Self-clinching terminal							
TK1-1.5 V	TK1-H-1.5 V	1.5	1.125	0.15	93.8	16	140	2.25
TK1-3 V	TK1-H-3 V	3	2.25	0.3	46.7	64.3	140	4.5
TK1-4.5 V	TK1-H-4.5 V	4.5	3.38	0.45	31.1	145	140	6.7
TK1-5 V	TK1-H-5 V	5	3.75	0.5	28.1	178	140	7.5
TK1-6 V	TK1-H-6 V	6	4.5	0.6	23.3	257	140	9
TK1-9 V	TK1-H-9 V	9	6.75	0.9	15.5	579	140	13.5
TK1-12 V	TK1-H-12 V	12	9	1.2	11.7	1,028	140	18
TK1-24 V	TK1-H-24 V	24	18	2.4	11.3	2,133	270	28.8

2. 1 Coil latching

Part No.		Nominal voltage, V DC	Set voltage, V DC (max.)	Reset voltage, V DC (max.)	Nominal operating current, mA (±10%)	Coil resistance, Ω (±10%)	Nominal operating power, mW	Max. allowable voltage, V DC
Standard PC board terminal	Self-clinching terminal							
TK1-L-1.5 V	TK1-L-H-1.5 V	1.5	1.125	1.125	66.7	22.5	100	2.25
TK1-L-3 V	TK1-L-H-3 V	3	2.25	2.25	33.3	90	100	4.5
TK1-L-4.5 V	TK1-L-H-4.5 V	4.5	3.38	3.38	22.2	202.5	100	6.7
TK1-L-5 V	TK1-L-H-5 V	5	3.75	3.75	20	250	100	7.5
TK1-L-6 V	TK1-L-H-6 V	6	4.5	4.5	16.7	360	100	9
TK1-L-9 V	TK1-L-H-9 V	9	6.75	6.75	11.1	810	100	13.5
TK1-L-12 V	TK1-L-H-12 V	12	9	9	8.3	1,440	100	18
TK1-L-24 V	TK1-L-H-24 V	24	18	18	6.3	3,840	150	28.8

3. 2 Coil latching

Part No.		Nominal voltage, V DC	Set voltage, V DC (max.)	Reset voltage, V DC (max.)	Nominal operating current, mA (±10%)	Coil resistance, Ω (±10%)	Nominal operating power, mW	Max. allowable voltage, V DC
Standard PC board terminal	Self-clinching terminal							
TK1-L2-1.5 V	TK1-L2-H-1.5 V	1.5	1.125	1.125	133.9	11.2	200	2.25
TK1-L2-3 V	TK1-L2-H-3 V	3	2.25	2.25	66.7	45	200	4.5
TK1-L2-4.5 V	TK1-L2-H-4.5 V	4.5	3.38	3.38	44.5	101.2	200	6.7
TK1-L2-5 V	TK1-L2-H-5 V	5	3.75	3.75	40	125	200	7.5
TK1-L2-6 V	TK1-L2-H-6 V	6	4.5	4.5	33.3	180	200	9
TK1-L2-9 V	TK1-L2-H-9 V	9	6.75	6.75	22.2	405	200	13.5
TK1-L2-12 V	TK1-L2-H-12 V	12	9	9	20.8	576	250	14.4
TK1-L2-24 V	TK1-L2-H-24 V	24	18	18	16.7	1,440	400	26.4


- Notes:
- Specified value of the pick-up, drop-out, set and reset voltage is with the condition of square wave coil pulse.
 - Standard packing: Tube: 50 pcs.; Case; 1,000 pcs.
 - In case of 5 V transistor drive circuit, it is recommended to use 4.5 V type relay.

DIMENSIONS


mm inch



Standard PC board terminal




PC board pattern (Copper-side view)




Tolerance: ±0.1 ±.004

Self-clinching terminal




Schematic (Bottom view)


• Single side stable
(Deenergized condition)



• 1-coil latching
(Reset condition)



• 2-coil latching
(Reset condition)



General tolerance: ±0.3 ±.012

*Orientation stripe located on top of relay.


REFERENCE DATA

1. Maximum value of continuous carrying current


Test conditions:

Coil applied voltage: 110% of rated voltage


Continuous carrying current: 1,000 hours

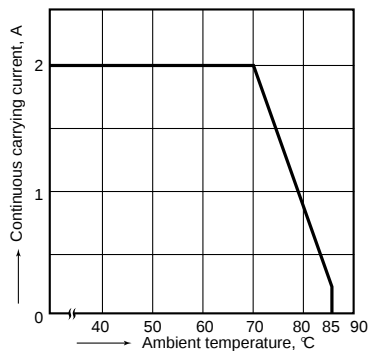

2. Maximum switching capacity

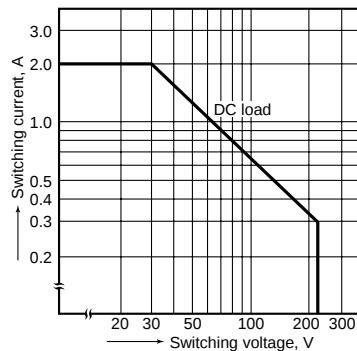


3. Life curve

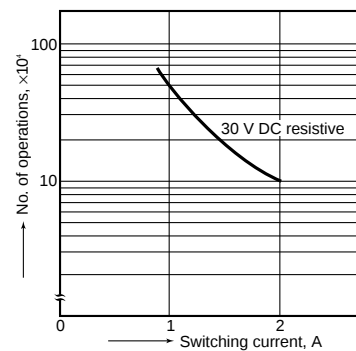

4. Mechanical life

Tested sample: TK1-12V, 8 pcs.

Switching frequency: 30 Hz

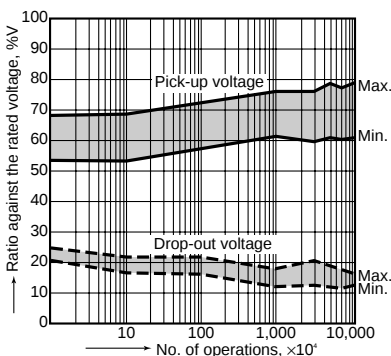


5. Electrical life (DC load)


Tested sample: TK1-12V, 10 pcs.

Condition: 2 A 30 V DC resistive load, 20 cpm


Circuit



Change of pick-up and drop-out voltage

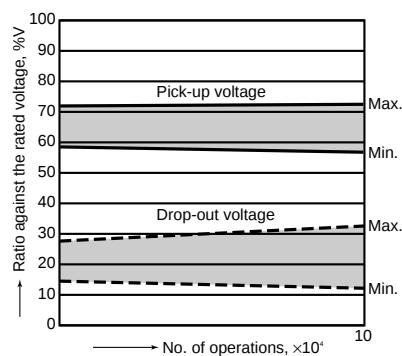

Change of contact resistance

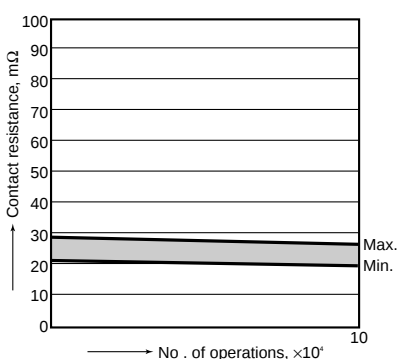


6. Coil temperature rise

Tested sample: TK1-12V, 6 pcs.


Measured portion: Inside the coil

Carrying current: 0 A, 1 A, 2 A

Ambient temperature: 25°C 77°F

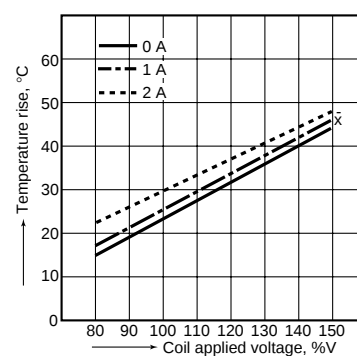


Ambient temperature: 70°C 158°F

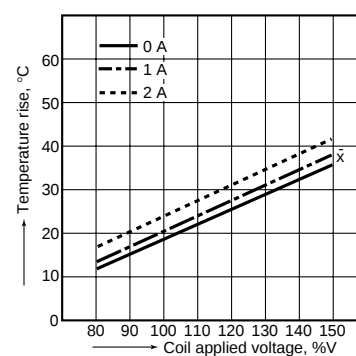


7. Operate/release time characteristics

Tested sample: TK1-5 V, 50 pcs.

<With diode>

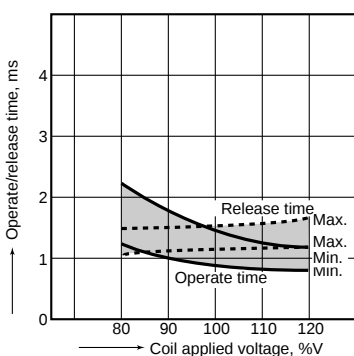


<Without diode>

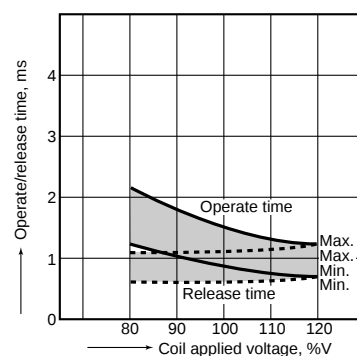


8. Distribution of pick-up and drop-out voltage

Tested sample: TK1-5V, 50 pcs.

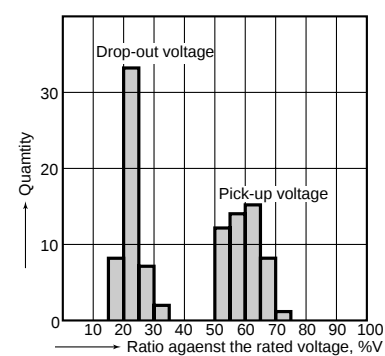


9. Distribution of set and reset voltage

Tested sample: TK1-L2-12V, 50 pcs.

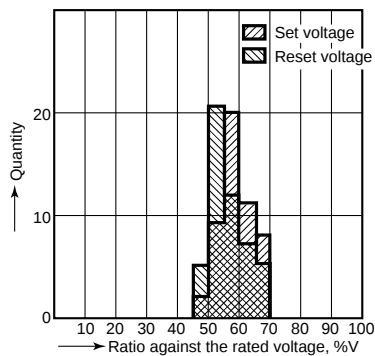


10. Ambient temperature characteristics

Tested sample: TK1-12V, 5 pcs.



11. Distribution of contact resistance


Tested sample TK1-5V, 50 pcs. (50×2 contacts)

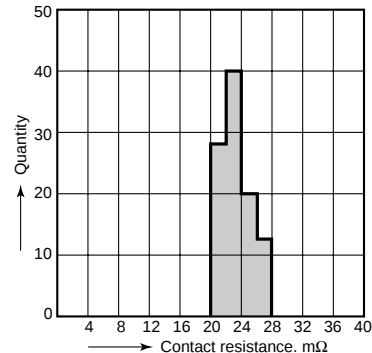


12. Distribution of operate/release bounce time

Tested sample: TK1-5V, 50 pcs.

<Operate bounce time>

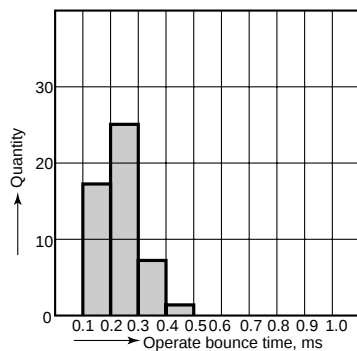


<Release bounce time>

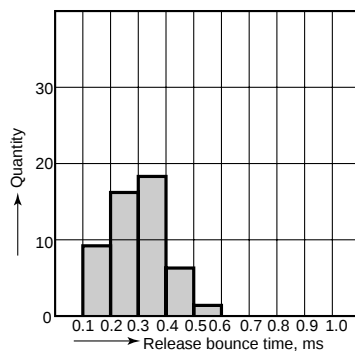


13.-(1) High-frequency characteristics

Isolation characteristics

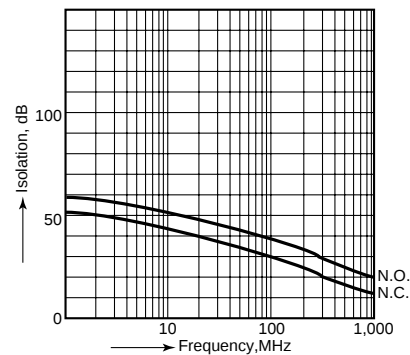


13.-(2) High-frequency characteristics

Insertion loss characteristics

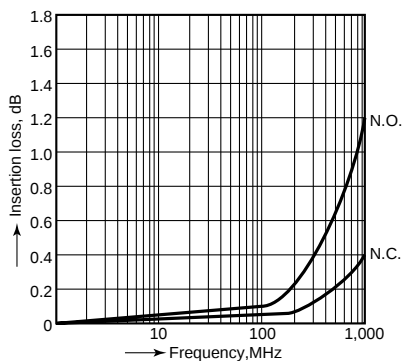


13.-(3) High-frequency characteristics

V.S.W.R.

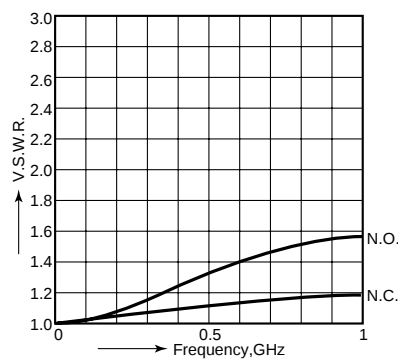


14. Malfunctional shock


Tested sample: TK1-12V, 6 pcs. (single side stable); TK1-L2-12V, 6 pcs. (latching)




15.-(1) Influence of adjacent mounting

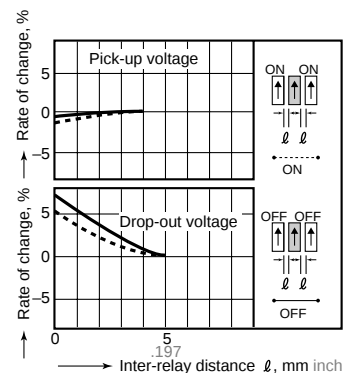

15.-(2) Influence of adjacent mounting

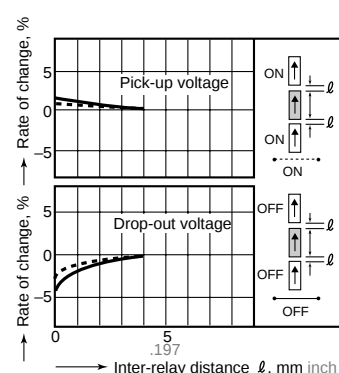


15.-(3) Influence of adjacent mounting

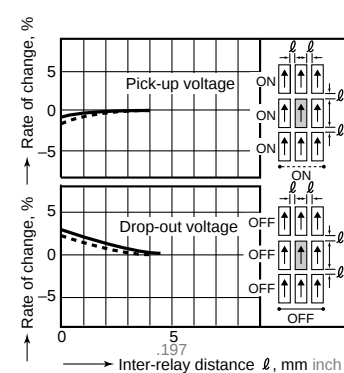


16. Actual load test (35 mA 48 V DC wire spring relay load)


Circuit

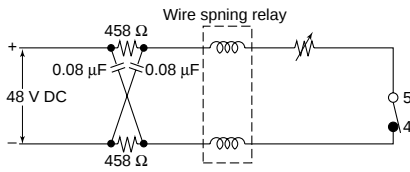

Change of pick-up and drop-out voltage

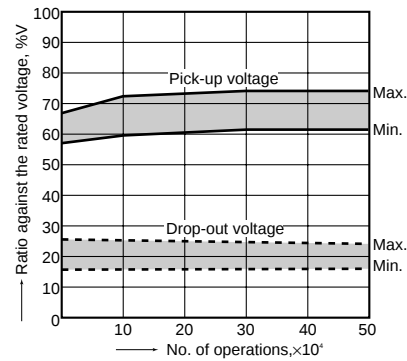

Change of contact resistance

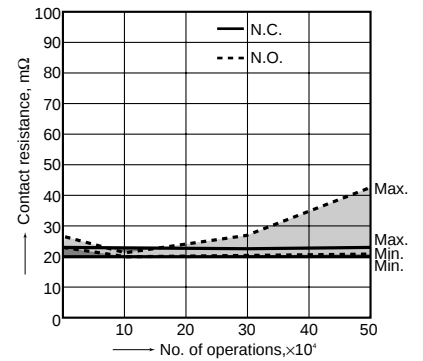

For Cautions for Use, see Page 178 and 179.