



SERIES TL 3320 SWITCHES

TACT SWITCHES SMT - RIGHT ANGLE



FEATURES & BENEFITS

- ▶ Multiple gram force options
- ▶ Right Angle SMT tact
- ▶ Unique design allows PC board edge mounting

APPLICATIONS/MARKETS

- ▶ Telecommunications
- ▶ Consumer Electronics
- ▶ Audio/visual
- ▶ Medical
- ▶ Testing/instrumentation
- ▶ Computer/servers/peripherals

SPECIFICATIONS

Contact Rating:	50mA @ 12 VDC
Life Expectancy:	80,000 cycles
Contact Resistance:	100mΩ @ 5 VDC
Insulation Resistance:	100mΩ min.
Dielectric Strength:	250 VAC
Operating Temperature:	-20°C to 70°C
Travel:	.25mm ±0.15

MATERIALS

Actuator:	Nylon
Base:	Nylon
Cover:	Tin Plate
Terminals:	Copper alloy, plated

HOW TO ORDER




SERIES	MODEL NO.	ACTUATOR ("L" Dimension)	OPERATING FORCE	CONTACT MATERIAL	TERMINATION
TL	3320	A = 3.15mm B = 3.85mm	F100 F130 F160 F250	Q = Silver	G = Gull Wing

Example Ordering Number

TL-3320-B-F160-Q-G

Specifications subject to change without notice.

TL 3320

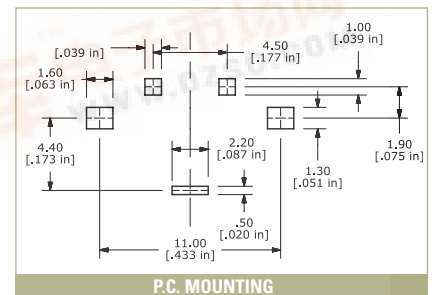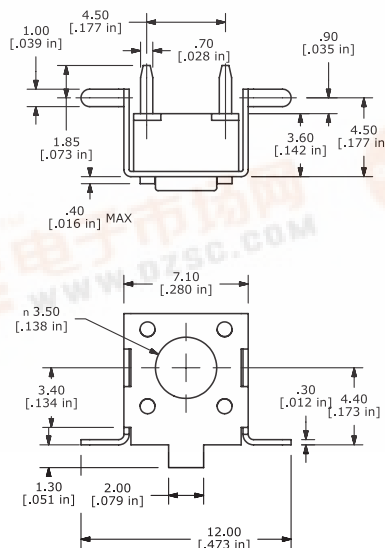

TACT SWITCHES

NAVIGATION SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

ROCKER SWITCHES

SLIDE SWITCHES

SNAP-ACTION SWITCHES

DIP SWITCHES

KEYLOCK SWITCHES

ROTARY SWITCHES

DETECTOR SWITCHES

CAP OPTIONS

