


T3/DS3/E3/STS-1 TRANSFORMERS

Eight Transformers Designed for T3, DS3, E3 and STS-1 Interface

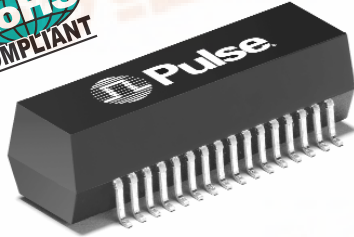

- Eight transformers in a surface mount package
- Models matched to leading transceiver ICs
- Return loss meets requirements of G.703
- Recognized by UL1950 (some parts pending approval)
- Isolation voltage: 1500Vrms

Electrical Specifications @ 25°C

RoHS-5 Compliant PN#	RoHS-6 Compliant PN#	Turns Ratio (Pri:Sec ±2%)	OCL Primary @ 25°C (μH MIN)	LL (μH MAX)	C _{ww} (pF MAX)	Isolation Voltage (Vrms MIN)	Package/ Schematic	Primary Pins
T3048	T3048NL	1:1	40	.150	10	1500	YB/1	1-2, 3-4, 5-6, 7-8 9-10, 11-12, 13-14, 15-16
T3049	T3049NL	1:2	19	.150	10	1500	YB/1	1-2, 3-4, 5-6, 7-8 9-10, 11-12, 13-14, 15-16
TX3047*	TX3047NL*	1:1	100	.150	10	1500	YB/1	1-2, 3-4, 5-6, 7-8 9-10, 11-12, 13-14, 15-16
TX3045*	TX3045NL*	1:1 & 1:2	100 & 40	.120	10	1500	YB/1	1-2, 5-6, 9-10, 13-14 & 3-4, 7-8, 11-12, 15-16



*NOTE: Operating Temperature Range: -40°C to +85°C.

For Tape & Reel packaging, add a "T" suffix to the part number when ordering (e.g. T3048 becomes T3048T, and T3048NL becomes T3048NLT).

Mechanical

Schematic

YB

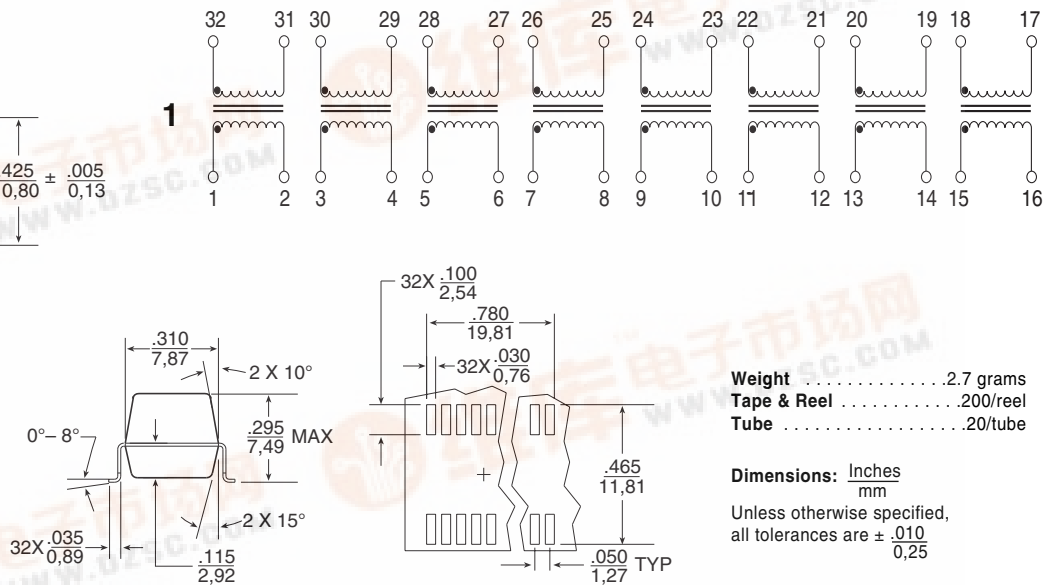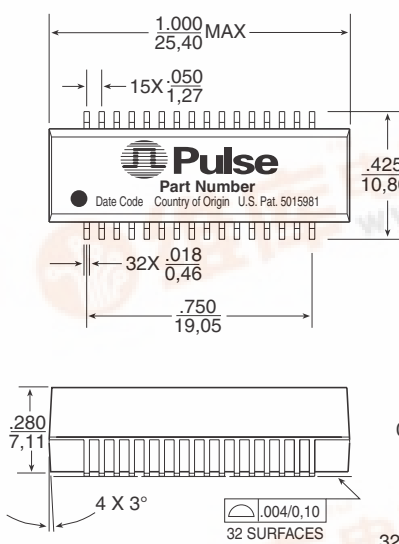

Weight2.7 grams
Tape & Reel200/reel
Tube20/tube

Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are ± .010
0.25

SUGGESTED PAD LAYOUT

For More Information:

Pulse Worldwide Headquarters

12220 World Trade Dr.
San Diego, CA 92128
U.S.A.

www.pulseeng.com

TEL: 858 674 8100
FAX: 858 674 8262

Pulse Europe

Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 7806 116
Fax: 49 7032 7806 135

Pulse China Headquarters

No. 1
Industrial District
Changan, Dongguan
China

Tel: 86 769 85538070
Fax: 86 769 85538870

Pulse North China

Room 1503
XinYin Building
No. 888 YiShan Rd.
Shanghai 200233
China

Tel: 86 21 54643211/2
Fax: 86 21 54643210

Pulse South Asia

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324

Tel: 65 6287 8998
Fax: 65 6280 0080

Pulse North Asia

No. 26
Kao Ching Rd.
Yang Mei Chen
Taoyuan Hsien
Taiwan, R. O. C.

Tel: 886 3 4641811
Fax: 886 3 4641911

