

ALUMINUM ELECTROLYTIC CAPACITORS

深圳UCSCE201HD供应商

晟多邦, 专业PCB打样工厂, 24小时加急出货

nichicon

CS series

Miniature Sized, High Ripple Current, Long Life



Smaller




Long Life



High Ripple Current


- High ripple current and Long Life product withstanding load life of 8000 to 10000 hours at +105°C.
- Suited for ballast application.
- Adapted to the RoHS directive (2002/95/EC).



Specifications


Item	Performance Characteristics								
Category Temperature Range	-40 ~ +105°C (160 ~ 400V) , -25 ~ +105°C (450V)								
Rated Voltage Range	160 ~ 450V								
Rated Capacitance Range	6.8 ~ 330μF								
Capacitance Tolerance	± 20% at 120Hz, 20°C								
Leakage Current	After 1 minutes' application of rated voltage, leakage current is not more than 0.04CV+100 (μA)								
tan δ	Measurement frequency : 120Hz, Temperature : 20°C								
	Rated voltage (V)	160	200	250	350	400	450		
	tan δ (MAX.)	0.20	0.20	0.20	0.24	0.24	0.24		
Stability at Low Temperature	Measurement frequency : 120Hz								
	Rated voltage (V)		160	200	250	350	400	450	
	Impedance ratio ZT / Z20 (MAX.)		Z-25°C / Z+20°C	3	3	3	5	5	6
			Z-40°C / Z+20°C	6	6	6	6	6	-
Endurance	After an application of D.C. bias voltage plus the rated ripple current for 10000 hours (8000 hours for φ D =10) at 105°C the peak voltage shall not exceed the rated D.C. voltage, capacitors meet the characteristic requirements listed at right.								
	Capacitance change		Within ±20% of initial value						
	tan δ		200% or less of initial specified value						
	Leakage current		Initial specified value or less						
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours, and after performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they will meet the specified value for endurance characteristics listed above.								
Marking	Printed with white color letter on dark brown sleeve.								

Radial Lead Type

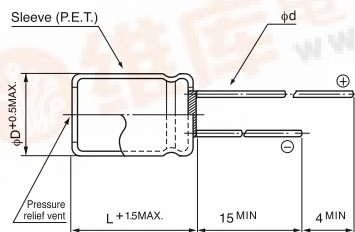

	10	12.5	16	18
φD	10	12.5	16	18
P	5.0	5.0	7.5	7.5
φd	0.6	0.6	0.8	0.8

Type numbering system (Example : 250V 100µF)

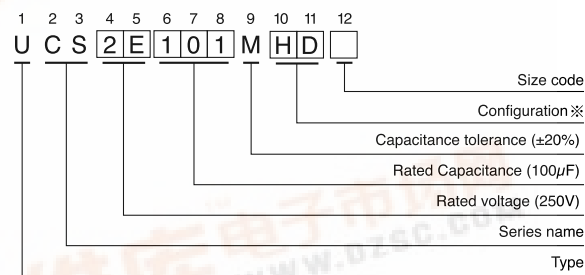

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
10	PD
12.5 ~ 18	HD

- Please refer to page 21 about the end seal configuration.



ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

CS series

■ Dimensions

Cap	Code	V		160		200		250		350		400		450	
				2C		2D		2E		2V		2G		2W	
6.8	6R8									10 × 16	280	10 × 16	280	10 × 20	280
10	100	10 × 16	320	10 × 16	320	10 × 20	350	10 × 20	350	10 × 20	350	10 × 20	350	12.5 × 20	450
15	150											12.5 × 20	550	12.5 × 25	600
22	220	10 × 20	500	10 × 20	500	10 × 20	500	12.5 × 20	650	12.5 × 20	650	12.5 × 20	760	16 × 20	730
33	330	10 × 20	650	10 × 20	650	12.5 × 20	800	16 × 20	900	16 × 20	900	16 × 20	900	16 × 25	980
														▲ 18 × 20	980
47	470	10 × 20	750	12.5 × 20	980	12.5 × 20	980	16 × 20	1080	16 × 25	1180	▲ 18 × 20	1180	18 × 25	1200
68	680	12.5 × 20	1180	12.5 × 20	1300	16 × 20	1300	16 × 25	1400	18 × 25	1470	18 × 25	1470	18 × 31.5	1575
								▲ 18 × 20	1375						
82	820	12.5 × 20	1275	16 × 20	1380	16 × 20	1380	18 × 25	1530	18 × 25	1525				
100	101	12.5 × 25	1420	16 × 20	1420	16 × 25	1530	18 × 25	1575						
		▲ 16 × 20	1420												
150	151	16 × 20	1890	16 × 25	1890	18 × 25	1940								
220	221	16 × 25	2370	18 × 25	2365	18 × 31.5	3130							Case size	※
330	331	18 × 31.5	3130	18 × 35.5	3220									φD × L (mm)	

※ : Rated Ripple (mA_{rms}) at 105°C 100kHz

▲ : In this case, [6] will be put at 12th digit of type numbering system.

• Frequency coefficient of rated ripple current

Frequency	50Hz	120Hz	1kHz	10kHz	100kHz ~
Coefficient	0.40	0.50	0.80	0.90	1.00