

ALUMINUM ELECTROLYTIC CAPACITORS

定制UKZ1E101MHM快应商

捷多邦, 专业PCB打样工厂, 24小时加急出货

nichicon



KZ

Premium Grade Type, For Audio Equipment

series




For Audio Use



Anti-Solvent Feature

- Premium grade "nichicon MUSE" acoustic series.
- Ideally suited for first class audio equipment where qualitative and quantitative comfortableness is required.
- Adapted to the RoHS directive (2002/95/EC).


KZ High Grade FG

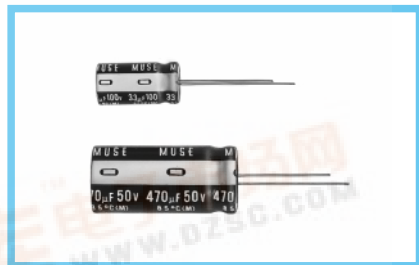


Specifications

Item	Performance Characteristics				
Category Temperature Range	-40 ~ +85°C				
Rated Voltage Range	25 ~ 100V				
Rated Capacitance Range	10 ~ 1000μF				
Capacitance Tolerance	± 20% at 120Hz, 20°C				
Leakage Current	After 1 minute's application of rated voltage, leakage current is 0.01CV or less.				
tan δ	Measurement frequency : 120Hz, Temperature : 20°C				
	Rated voltage (V)	25	50	100	
	tan δ (MAX.)	0.12	0.08	0.07	
Stability at Low Temperature	Measurement frequency : 120Hz				
	Rated voltage (V)		25	50	100
	Impedance ratio ZT / Z20 (MAX.)	Z-25°C / Z+20°C	2	2	2
		Z-40°C / Z+20°C	4	3	3
Endurance	After 1000 hours' application of rated voltage at 85°C, capacitors meet the characteristic requirements listed at right.				
	Capacitance change	Within ±20% of initial value			
	tan δ	150% or less of initial specified value			
	Leakage Current	Initial specified value or less			
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours, and after performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they will meet the specified value for endurance characteristics listed above.				
Marking	Printed with gold color letter on black sleeve.				

Radial Lead Type

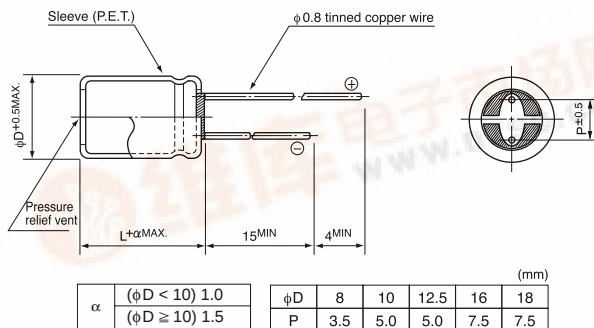

Type numbering system (Example : 25V 100μF)

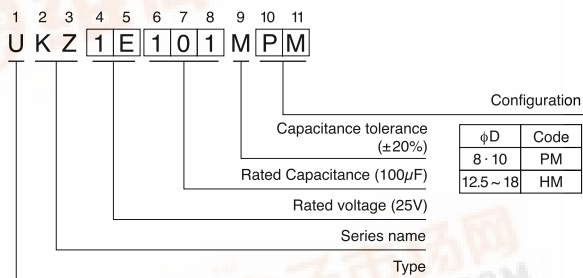

• Please refer to page 21 about the end seal configuration.

Dimensions

φD × L (mm)

Cap. (μF)	V	25	50	100
	Code	1E	1H	2A
10	100			8 × 11.5
22	220		8 × 11.5	10 × 16
33	330	8 × 11.5	10 × 12.5	10 × 20
47	470	10 × 12.5	10 × 16	12.5 × 20
100	101	10 × 16	12.5 × 20	16 × 25
220	221	12.5 × 20	16 × 25	16 × 35.5
330	331	12.5 × 25	16 × 31.5	18 × 35.5
470	471	16 × 25	16 × 35.5	
1000	102	16 × 35.5	18 × 40	

Please refer to page 21, 22, 23 about the formed or taped product spec.