

Coaxial

查询VHF-8400+供应商

捷多邦, 专业PCB打样工厂, 24小时加急出货

High Pass Filter

VHF-8400+ VHF-8400

50Ω 9000 to 13000 MHz

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input* 7W max. at 25°C

*Passband rating, derate linearly to 3W at 100°C ambient.

Features

- Low Cost
- Small size
- 5 sections
- Temperature stable
- Excellent power handling, 7W
- DC block in/out, breakdown voltage, 1kV typ.

Application

- Sub-harmonic rejection and DC blocking
- Transmitters/Receivers
- Lab Use
- Instrumentation
- Test equipment




CASE STYLE: FF704

Connectors	Model	Price	Qty.
SMA	VHF-8400	\$24.95 ea.	(1-9)
SMA	VHF-8400+	\$24.95 ea.	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Outline Drawing

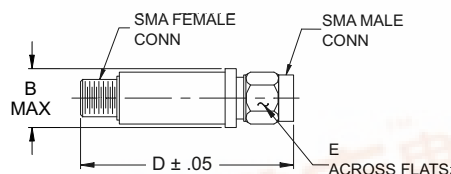


Outline Dimensions (Inch/mm)

B	D	E	wt.
.410	1.43	.312	grams
10.41	36.32	7.92	10


High Pass Filter Electrical Specifications (T_{AMB} = 25°C)

STOPBAND (MHz)		fco, MHz	PASSBAND (MHz)		VSWR		NO. OF SECTIONS
(Loss>30dB)	(Loss>20dB)	(Loss 3dB)	(Loss<2.5dB)	(Loss<3dB)	Stopband	Frequency	
Typ.	Min.	Typ.	Max.	Max.		(MHz)	
DC-F1	DC-F2	F3	F4-F5			1.5:1	
DC-5700	DC-6000	8400	9500-13000	9000-13000	20:1	9000-13000	5

Typical Frequency Response


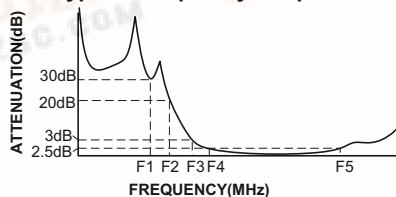


Electrical Schematic

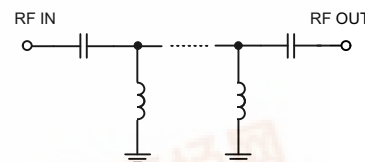

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	55.48	1737.18
500	41.57	868.59
4500	31.17	49.64
5700	36.69	31.60
6000	27.78	29.46
7500	23.46	17.05
8020	9.65	5.68
8400	2.88	1.50
8600	2.11	1.15
9000	1.57	1.06
9500	1.43	1.24
10000	1.47	1.46
12000	0.92	1.22
13000	1.10	1.48
16000	5.43	4.72

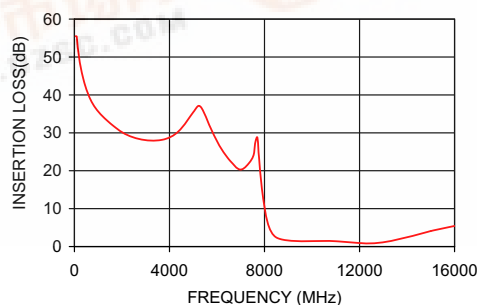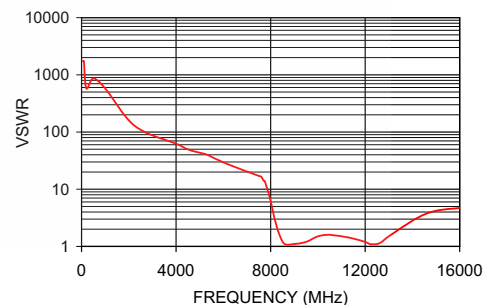VHF-8400
INSERTION LOSSVHF-8400
VSWR

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

REV. A
M101678
EDR-6982/5
VHF-8400

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

