



TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

10-250.DC2


1.16 MAX.

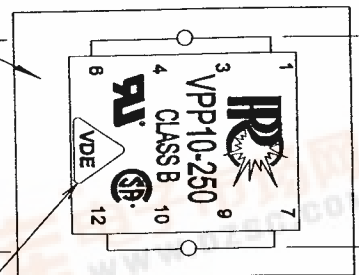

1.125 REF

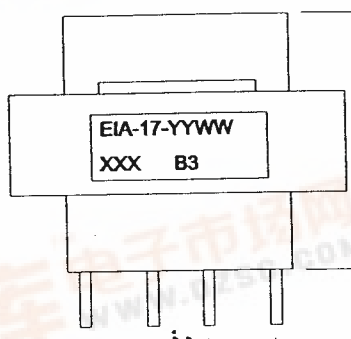

1.34 MAX

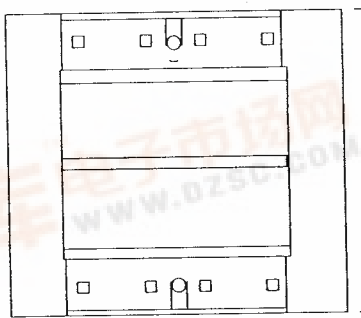

MAX

MTG. 1.06
NO VARNISH DRIPS ON TOP SURFACE OF LAMINATION.
ALL MANUFACTURING SITES USE THIS MARK

PC PINS .025 SQ

PRI 2

SEC 2
5 V, .25 A

.187 MIN

1.000

115/230V
50/60 HZ

PRI 1

SEC 1
5 V, .25 A

2.5 VA

PRODUCTION TESTS

TURN RATIO = 100%

DC RESISTANCE IN OHMS	1-3 =	723 NOM
	4-6 =	902 NOM
	7-9 =	2.6 NOM
	10-12 =	3.3 NOM

MAX EXCITATION CURRENT = 0.008 A

APPLY 230V 60HZ 1-6 (3+4)

PRI WDGS 114.5 TO 115.5 V

SEC WDGS 6.3 TO 7 V

HIPOT:	4000V P-S
	4000V P,S, TO CORE
	600 V P-P, S-S

CONTINUITY = 100% PRI'S IN FINAL
IMPREGNATION: 2 HRS PREHEAT
PINS TO BE FREE OF IMPREGNATION

FINAL ASSEMBLY NOTES

METHOD 1 X 1
LEAVE OFF LAST "I" PCS

MARKING SEE LABEL DETAIL ABOVE
ON APPLY PART NO. LABEL AFTER IMPREGNATION



PART NO.: VP10-250

查询VP10-250供应商

捷多邦, 专业PCB打样工厂, 24小时加急出货